


9. EXPLODED VIEWS AND PARTS LIST

- NOTES:**
- Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.
 - The $\triangle$ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to ∇ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

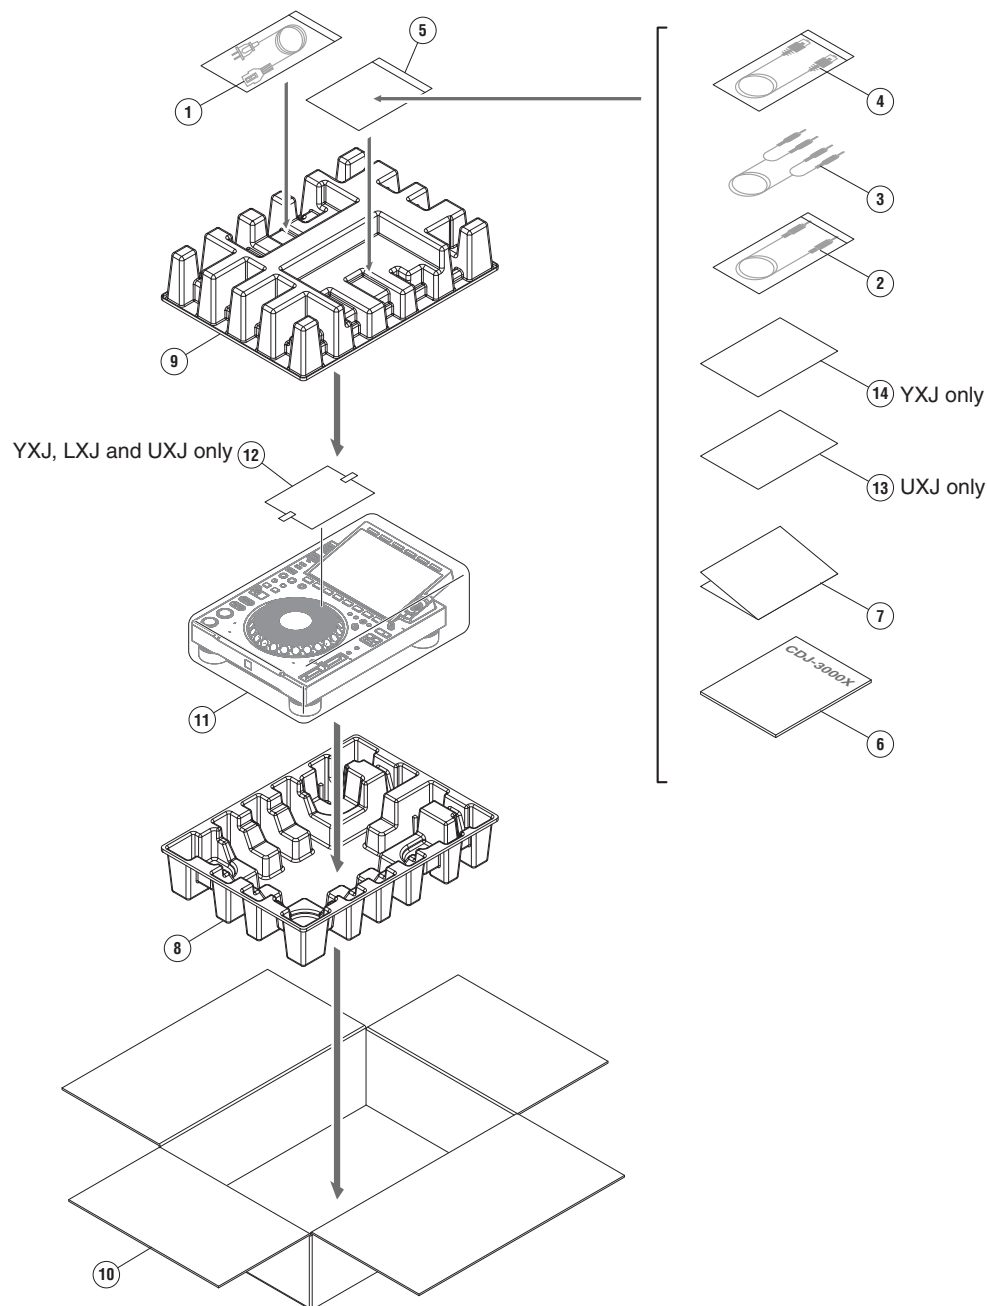

(1) PACKING SECTION PARTS LIST

Mark No.	Description	Part No.
A	 1 Power cord	See Contrast table (2)
	2 Digital audio cable	DDE1154
	3 Analog audio cable	XDE3045
	4 LAN cable	DDE1141
NSP	5 Polyethylene Bag (0.06*230*340)	AHG7117
B	6 Quick Start Guide	See Contrast table (2)
	7 Precautions for Use	See Contrast table (2)
	8 Packing Pad	DHA2070
	9 Packing Pad	DHA2071
	10 Packing Case	See Contrast table (2)
NSP	11 Mirror Mat (1200*1000)	DHL1169
NSP	12 Leaflet	See Contrast table (2)
NSP	13 Leaflet	See Contrast table (2)
NSP	14 Warranty	See Contrast table (2)


(2) CONTRAST TABLE

CDJ-3000X/YXJ, LXJ, UXJ and AXJ are constructed the same except for the following:

Mark	No.	Symbol and Description	CDJ-3000X/YXJ	CDJ-3000X/LXJ	CDJ-3000X/UXJ	CDJ-3000X/AXJ
C	 1	Power cord	DDG1124	DDG1124	DDG1123	DDG1125
	6	Quick Start Guide	DRH1824	DRH1824	DRH1824	DRH1825
	7	Precautions for Use	DRH1826	DRH1826	DRH1826	DRH1828
	10	Packing Case	DHG3954	DHG3965	DHG3966	DHG3968
	NSP 12	Leaflet	DRH1797	DRH1797	DRH1797	Not used
NSP	13	Leaflet	Not used	Not used	DRH1799	Not used
NSP	14	Warranty	DRY1280	Not used	Not used	Not used

9.2 CHASSIS SECTION



• Top view

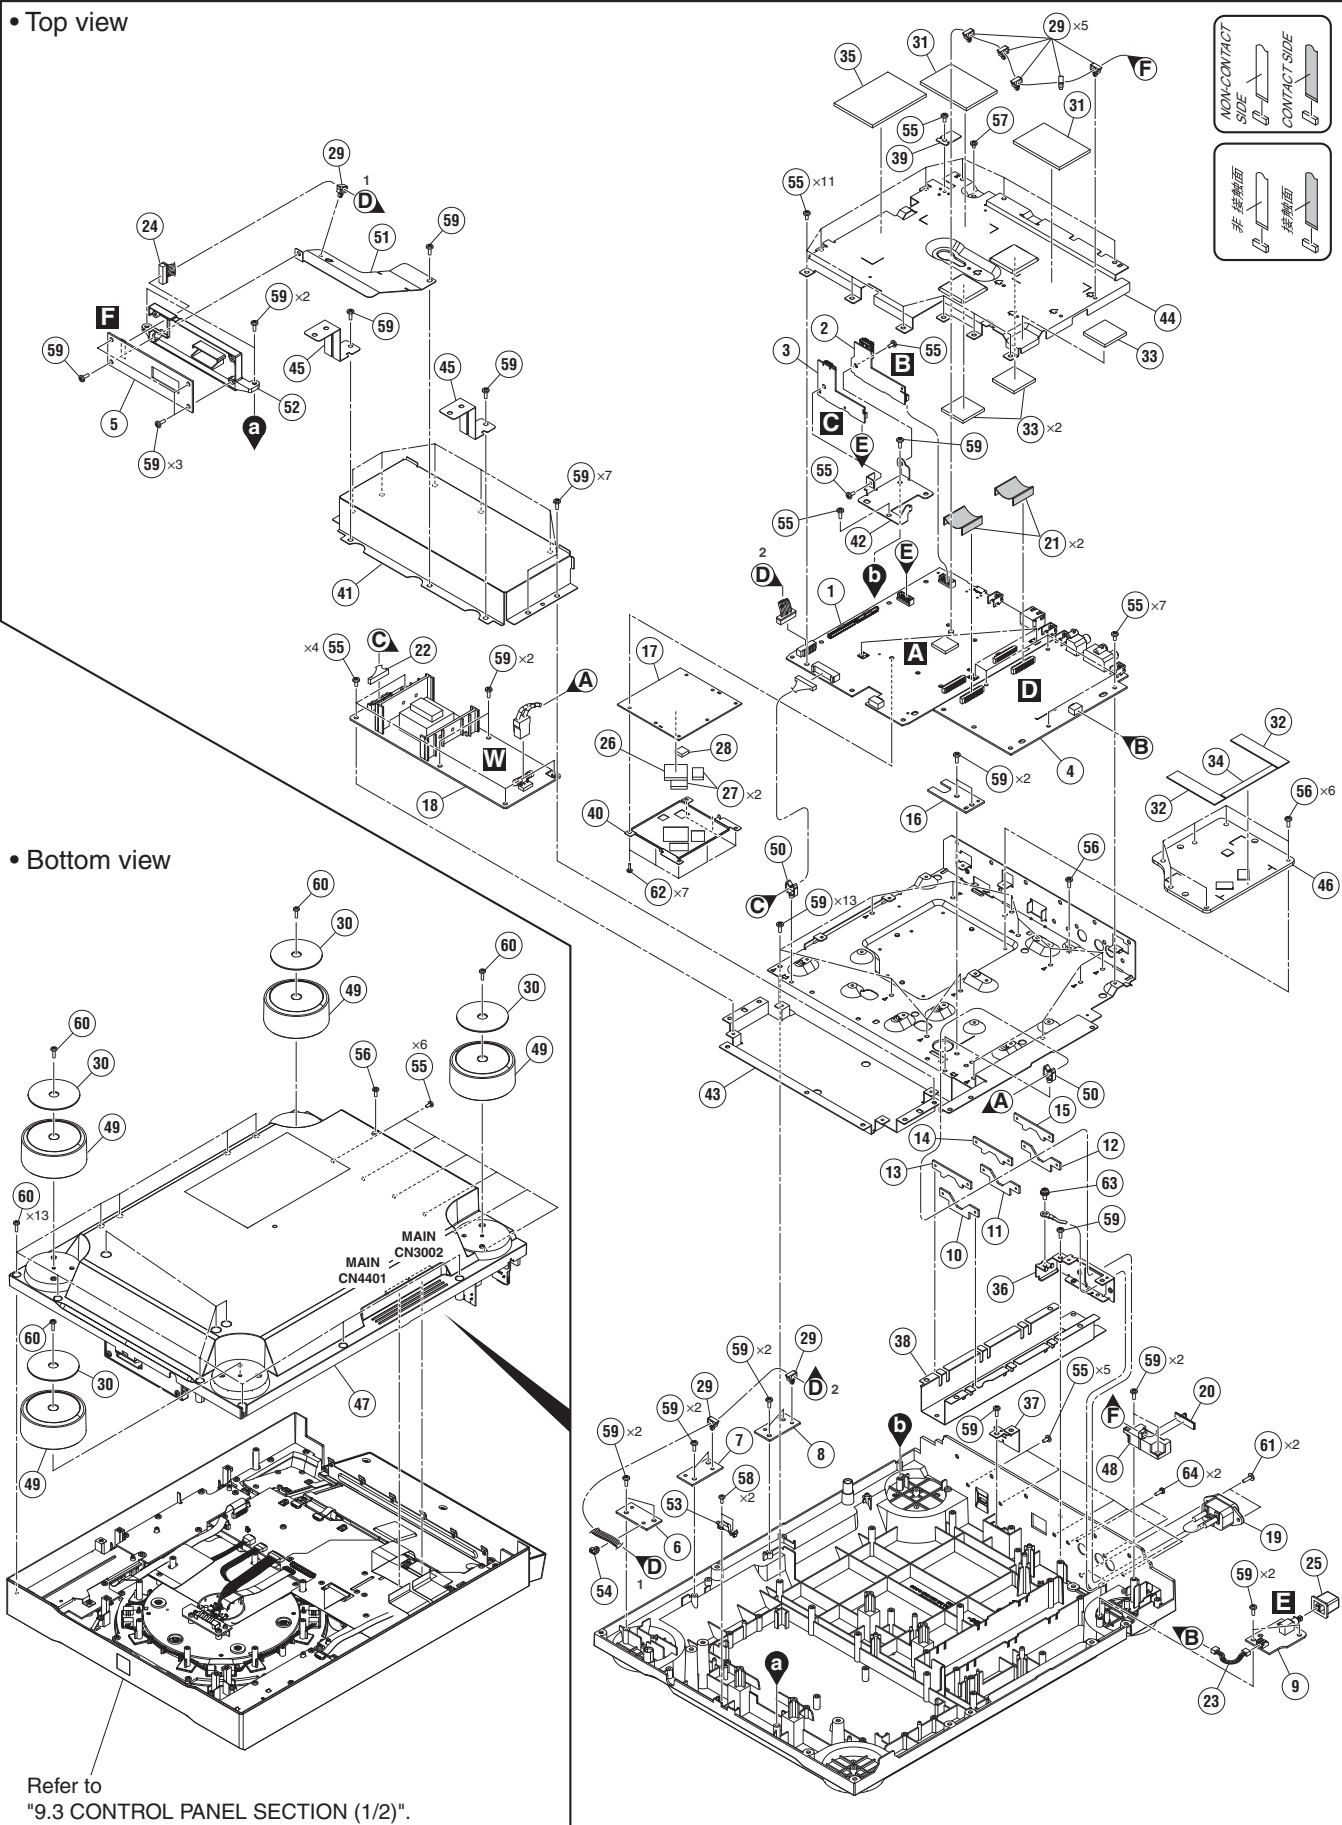

CHASSIS SECTION PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>		<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	MAIN Assy	DWX5098		46	Heat Sink	DNH3652
	2	USBA Assy	DWX5101	⚠	47	Chassis	DNK7229
	3	USBC Assy	DWX5102		48	Holder	DNK7230
	4	AUDB Assy	DWX5099		49	Insulator	DNK7242
	5	NFCB Assy	DWX5111		50	Holder	VEC1355
B	6	OSK1	DWX5248		51	Stay	DNH3660
	7	OSK2	DWX5249		52	Holder	DNK7282
	8	OSK3	DWX5250		53	Lens	DNK7283
	9	PWSW Assy	DWX5119		54	Cable Tie	ZCA-SKB90BK
	10	SSK11 Assy	DWX5121		55	Screw	BBZ30P060FTB
B	11	SSK12 Assy	DWX5122		56	Screw	BBZ30P080FTB
	12	SSK13 Assy	DWX5123		57	Screw	BPZ220P040FTB
	13	SSK21 Assy	DWX5124		58	Screw	BPZ226P060FTC
	14	SSK22 Assy	DWX5125		59	Screw	BPZ30P080FTC
	15	SSK23 Assy	DWX5126		60	Screw	BPZ30P100FTB
C	16	SSK3 Assy	DWX5138		61	Screw	IBZ30P100FTB
	17	SoM Module	DWX4722		62	Screw	PMB20P080FNI
	⚠ 18	SW POWER SUPPLY	DWR1605		63	Screw	PMH40P080FTC
	⚠ 19	AC Inlet	DKP3991		64	Screw	PPZ30P080FTB
	20	Wi-Fi Antenna	DSD1006				
D	21	FFC	DDD2243				
	22	Crimp Connector	DDC1060				
	23	Parallel Jumper	DDC1047				
	24	Crimp Connector	DDC1069				
	25	Power Knob	DAC2306				
D	26	Heat Cond Sheet	DEB2092				
	27	Heat Cond Sheet	DEB2093				
	28	Heat Cond Sheet	DEB2094				
	29	Locking Mini Clamp	DEC2439				
	30	Cushion	DEC3838				
E	31	Cushion	DEC3884				
	32	EMI Absorb Sheet	DEC4091				
	33	Cushion	DEC4187				
	34	EMI Absorb Sheet	DEC4193				
	35	Cushion	DEC4202				
E	36	Bracket/ACI	DNH3020				
	37	Stay/KST	DNH3021				
	38	Shield Case	DNH3317				
	39	Stay	DNH3328				
	40	Shield Case	DNH3526				
F	41	Shield Case	DNH3632				
	42	Stay	DNH3642				
	43	Stay	DNH3643				
	44	Shield Case	DNH3644				
	45	Stay	DNH3645				

9.3 CONTROL PANEL SECTION (1/2)

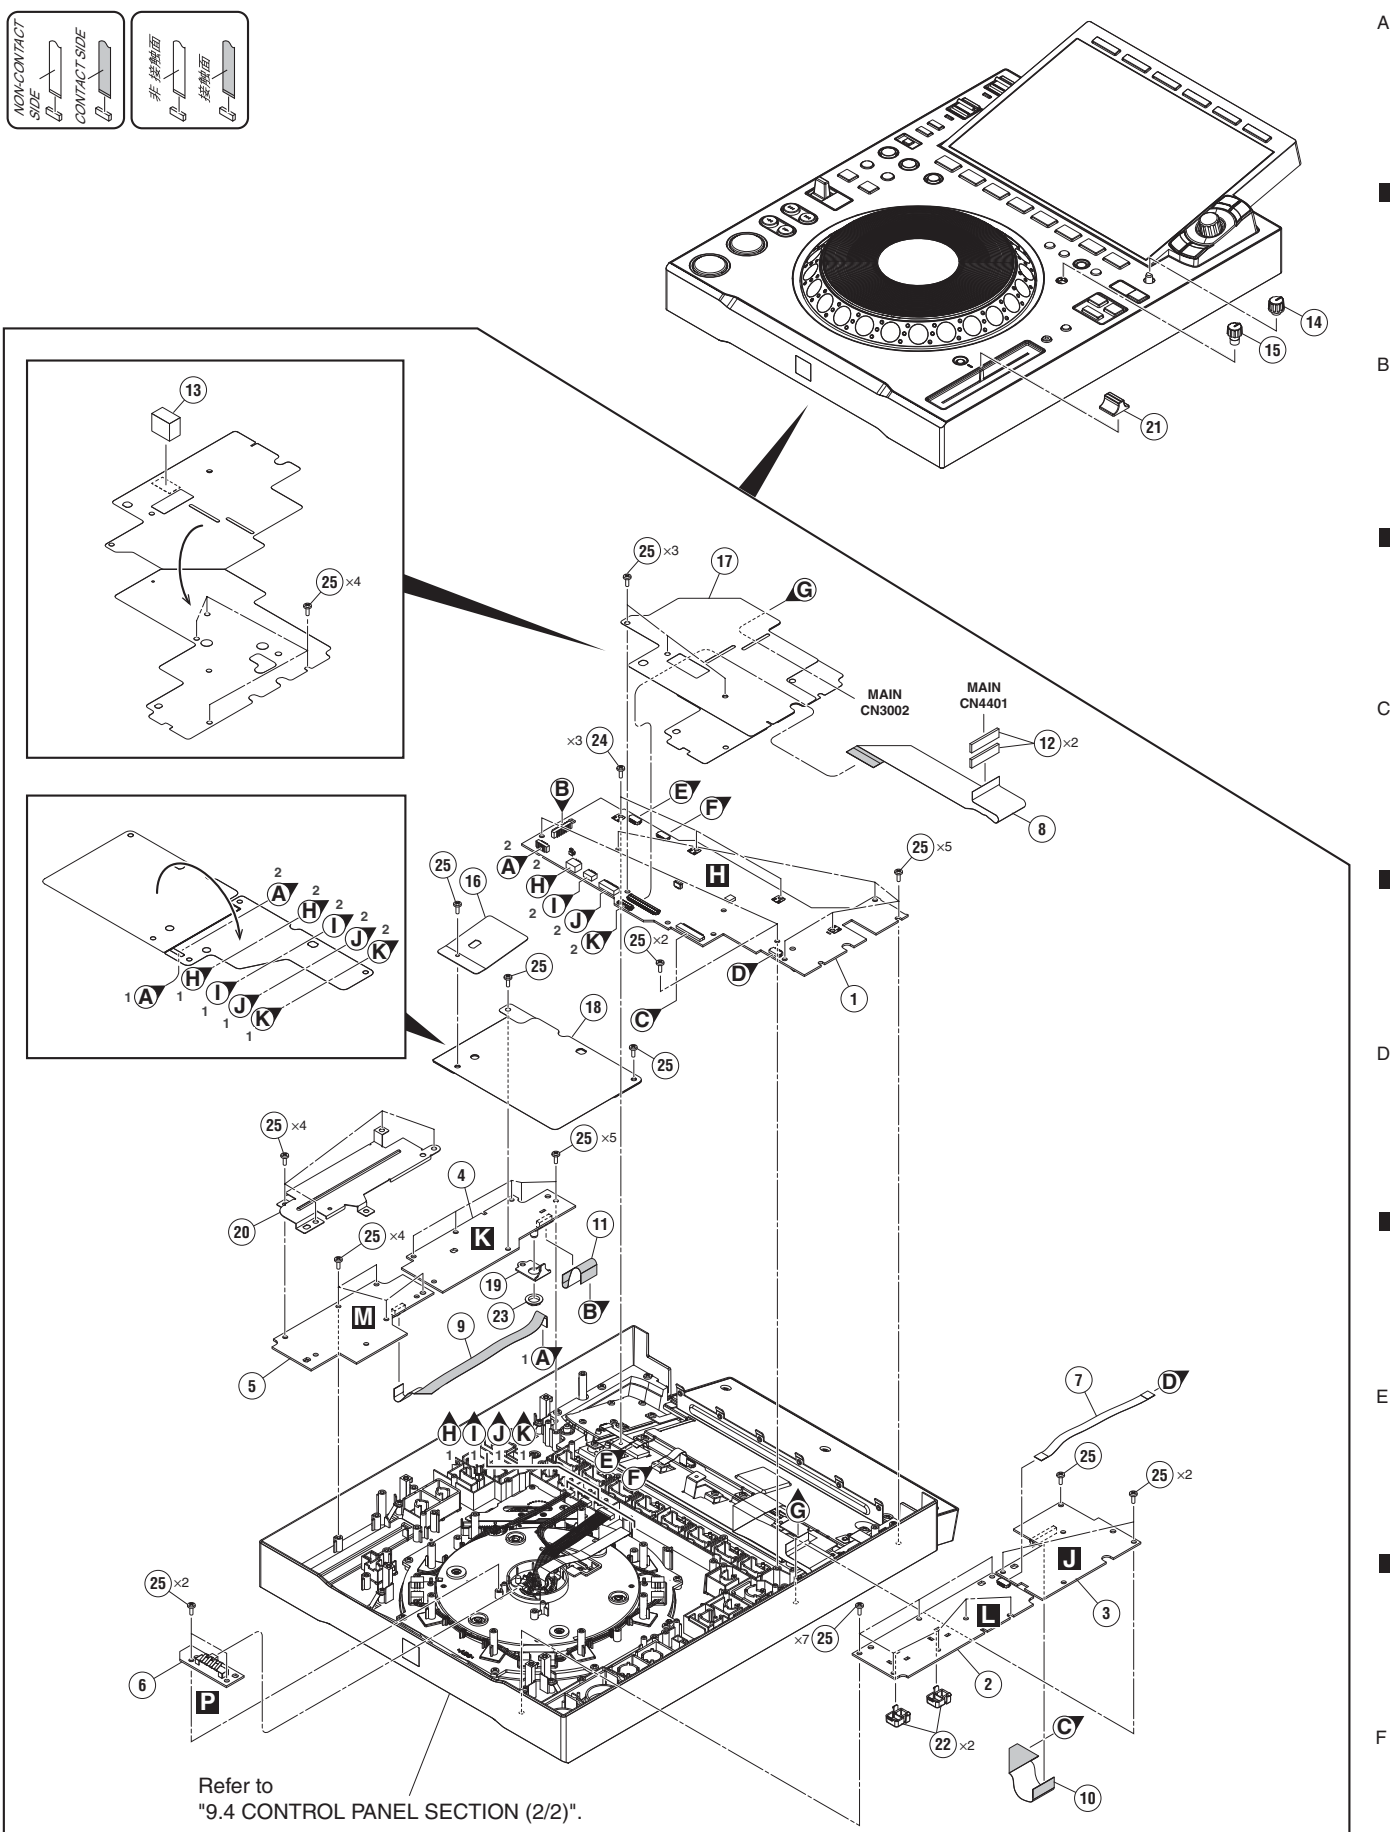

CONTROL PANEL SECTION (1/2) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1 PNLB Assy	DWX5104
	2 KSWB Assy	DWX5106
	3 SUB1 Assy	DWX5116
	4 SUB2 Assy	DWX5117
	5 SLDB Assy	DWX5118
	6 CONB Assy	DWX5120
	7 FFC	DDD2238
	8 FFC	DDD2239
	9 FFC	DDD2240
	10 FFC	DDD2241
B	11 FFC	DDD2242
	12 Ferrite Clamper	DTX1011
	13 Cushion	DEC3921
	14 Knob	DAA1405
	15 Knob	DAA1444
	16 Barrier	DEC3932
	17 Sheet	DEC4194
	18 Sheet	DEC4195
	19 Stay	DNH3412
	20 Shield Case	DNH3650
C	21 Knob/SLD	DNK5981
	22 Lens	DNK7235
	23 Flange Nut M9	DBN1008
	24 Screw	BBZ30P060FTB
	25 Screw	BPZ30P080FTC


D

E

F

9.4 CONTROL PANEL SECTION (2/2)



• Bottom view

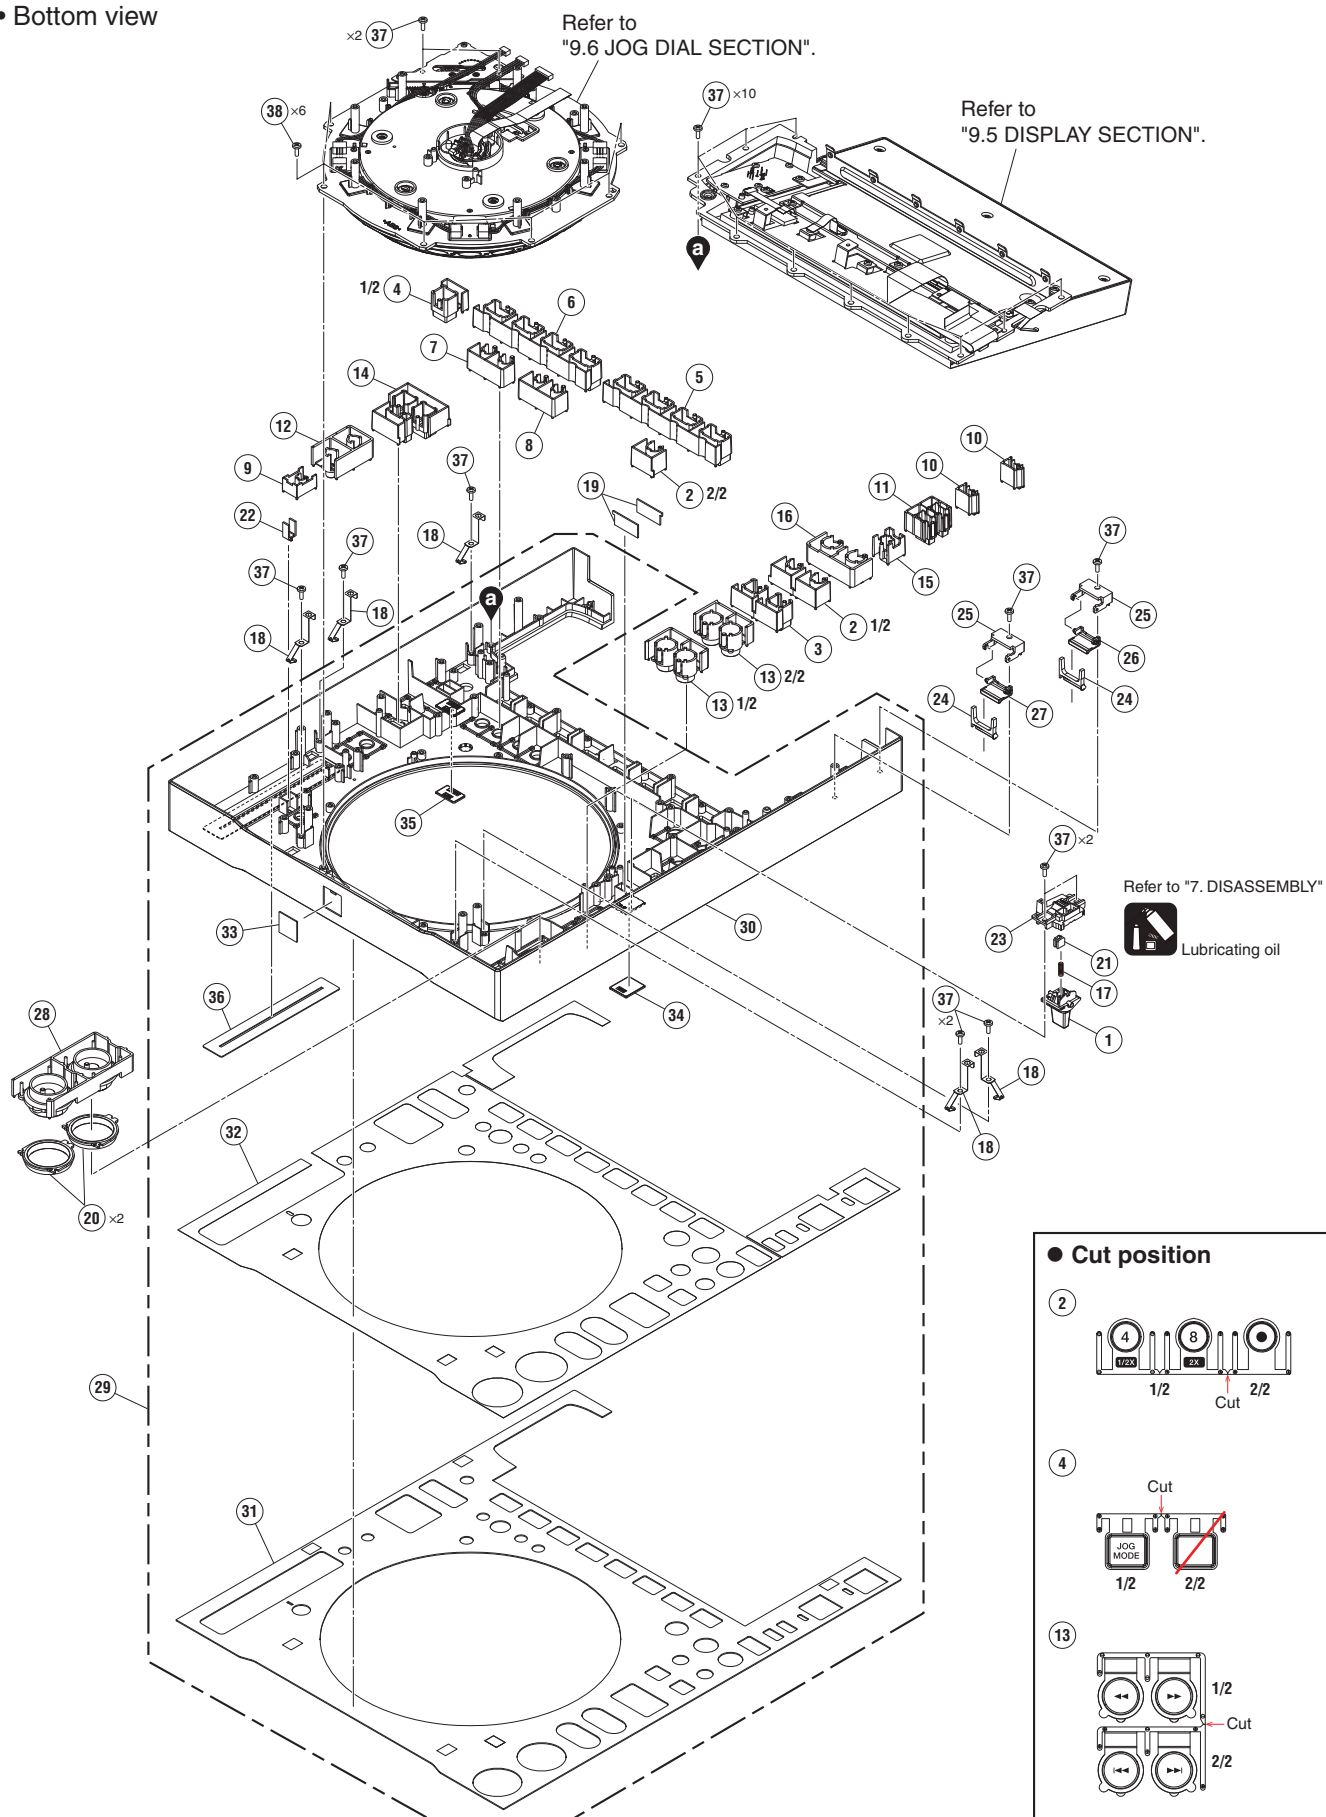

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	Lever	DAC3097
	2	Button	DAC3463
	3	Button	DAC3464
	4	Button	DAC3465
	5	Button	DAC3467
	6	Button	DAC3468
	7	Button	DAC3474
	8	Button	DAC3475
	9	Button	DAC3476
	10	Button	DAC3780
B	11	Button	DAC3781
	12	Button	DAC3782
	13	Button	DAC3783
	14	Button	DAC3785
	15	Button	DAC3803
	16	Button	DAC3806
	17	Lever Spring	DBH1702
	18	Leaf Spring	DBK1413
	19	Brake	DEC3948
	20	Ring Rens (PLAY)	DNK5315
C	21	Lever Cap	DNK5344
	22	Lens	DNK5862
	23	Base	DNK6470
	24	Lens	DNK7236
	25	Holder	DNK7237
	26	Door	DNK7238
	27	Door	DNK7241
	28	Button Unit	DXB2232
	29	1..CDJ-3000X Panel Service Assy	DEA1196
	NSP 30	2..Control Panel	DNK7239
	NSP 31	2..Panel	DAH3454
	NSP 32	2..DS ADH Sheet	DEH1160
	33	2..Panel	DAH3476
	34	2..Panel	DAH3256
	35	2..Panel	DAH3257
	36	2..Sheet	DAH3456
	37	Screw	BPZ30P080FTC
	38	Screw	APZ30P080FTC
E			
F			

9.5 DISPLAY SECTION

• Bottom view

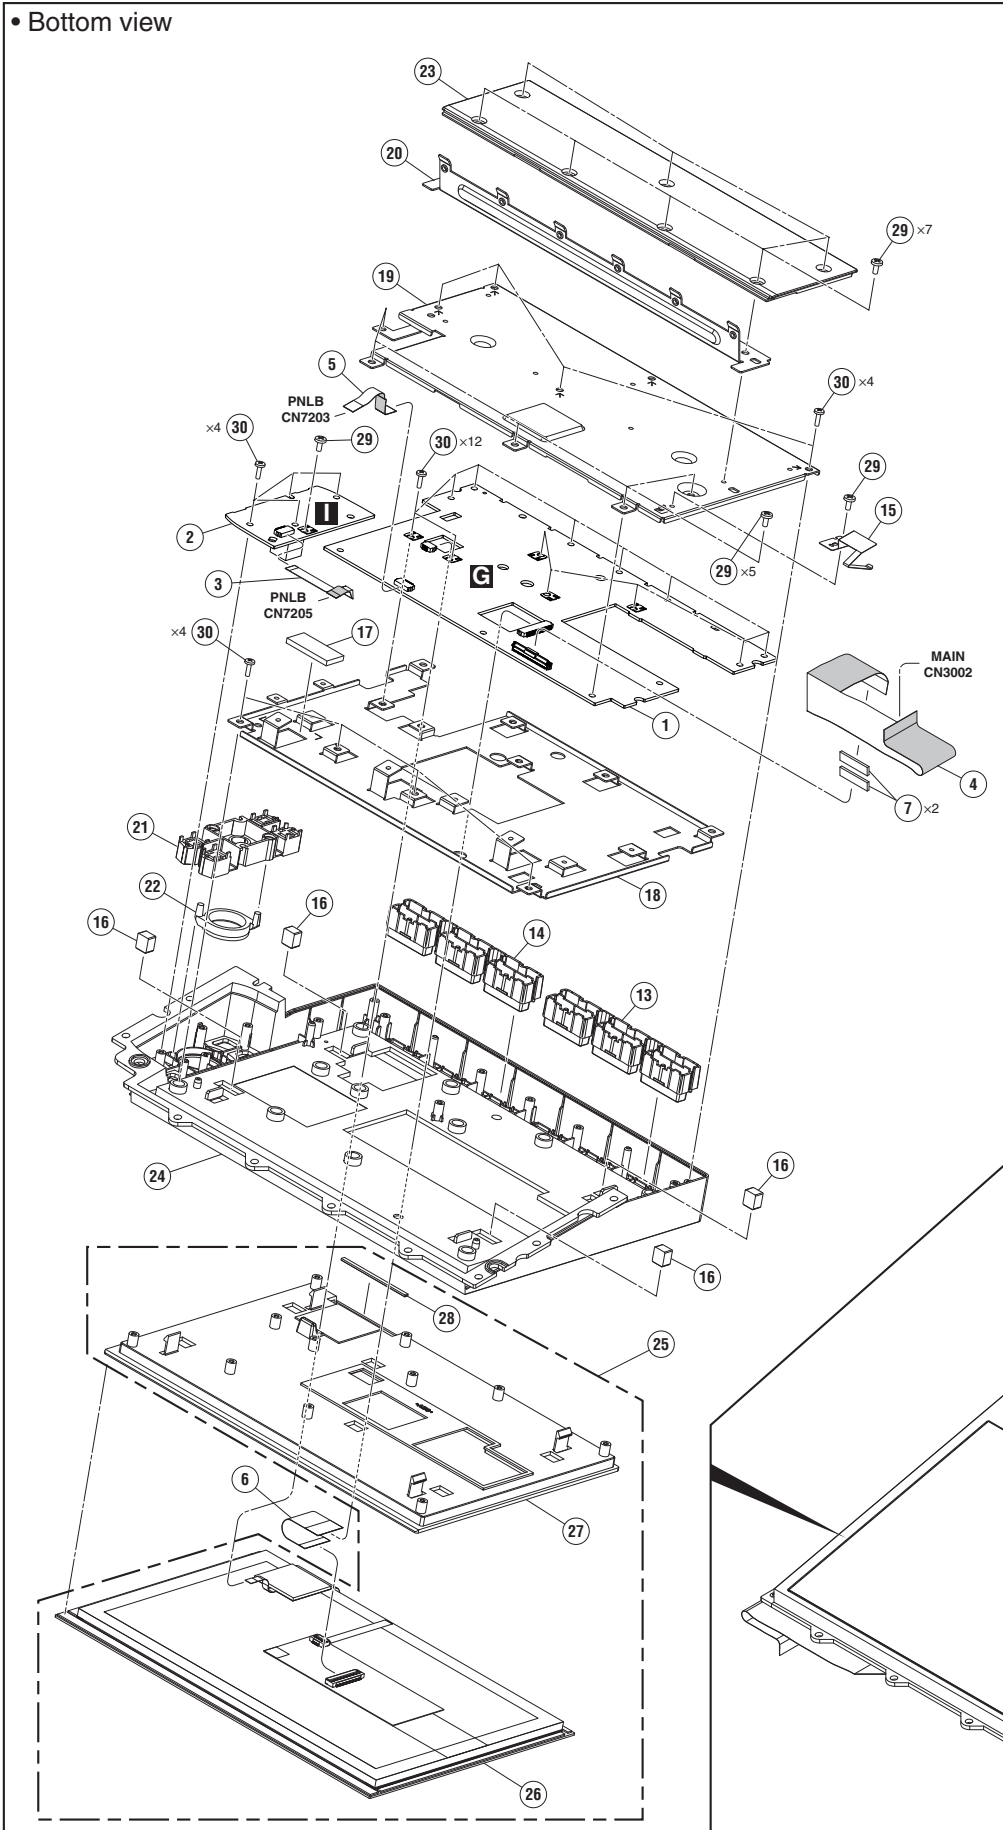

A
B
C
D
E
F



DISPLAY SECTION PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	MLCB Assy	DWX5100
	2	ENCB Assy	DWX5105
	3	FFC	DDD2236
	4	FFC	DDD1922
	5	FFC	DDD2237
	6	FFC	DDD2244
	7	Ferrite Clamper	DTX1011
	8	Dial Knob	DAA1246
	9	Button	DAC3749
	10	Button	DAC3750
B	11	Button	DAC3751
	12	Button	DAC3752
	13	Button	DAC3778
	14	Button	DAC3779
	15	Leaf Spring	DBK1414
	16	Gasket	DEC4159
	17	Cushion	DEC4199
	18	Stay	DNH3646
	19	Shield Case	DNH3647
	20	Angle	DNH3649
C	21	Holder	DNK7231
	22	Lens	DNK7232
	23	Cover	DNK7233
	24	Control Panel	DNK7234
	25	1..LCD Holder Assy	DEA1207
	26	2..LCD Module	DWX5361
	27	2..Holder	DNK7192
	28	2..Cushion	DEC4215
	29	Screw	BBZ30P060FTB
	30	Screw	BPZ26P080FTC




9.6 JOG DIAL SECTION



• Bottom view

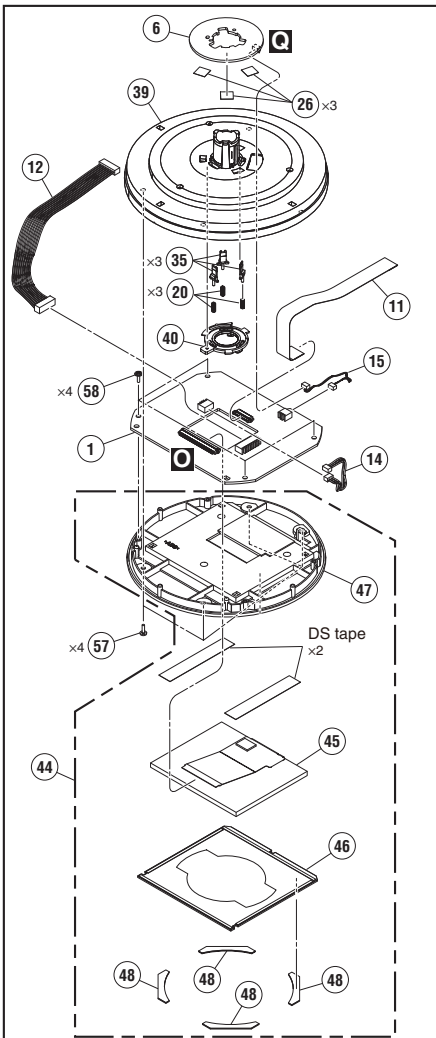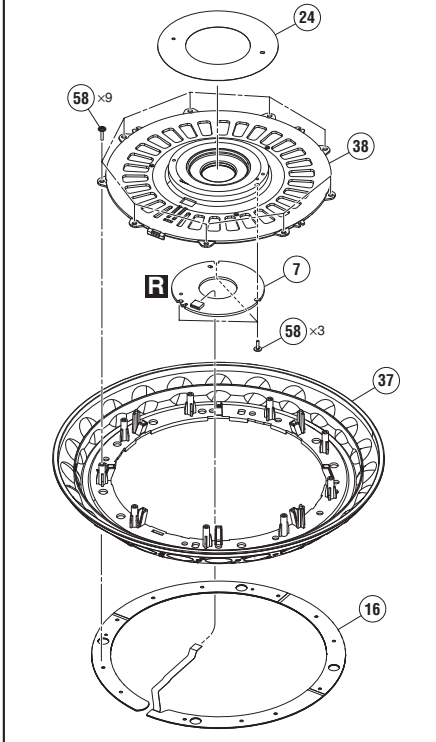

Refer to "7. DISASSEMBLY"

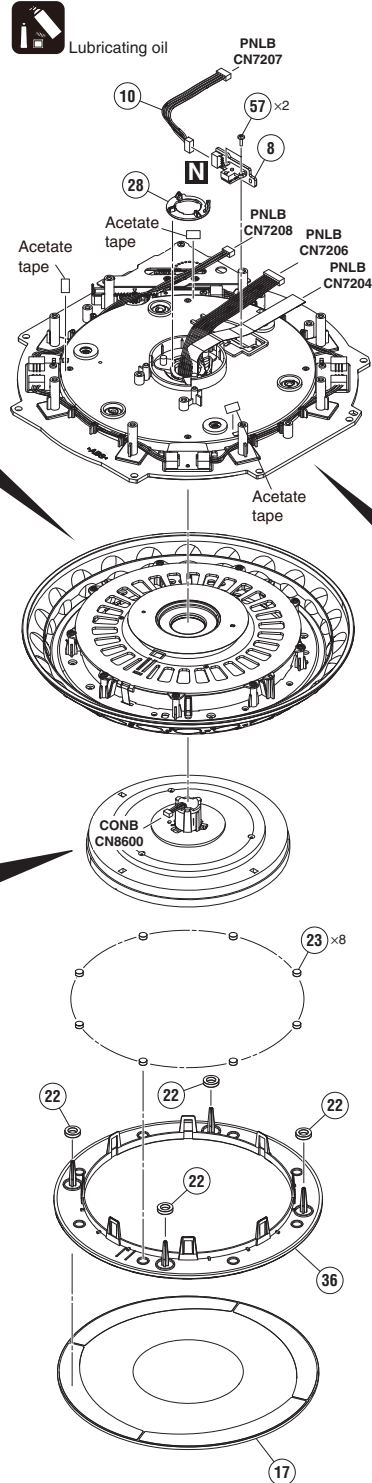

• Bottom view

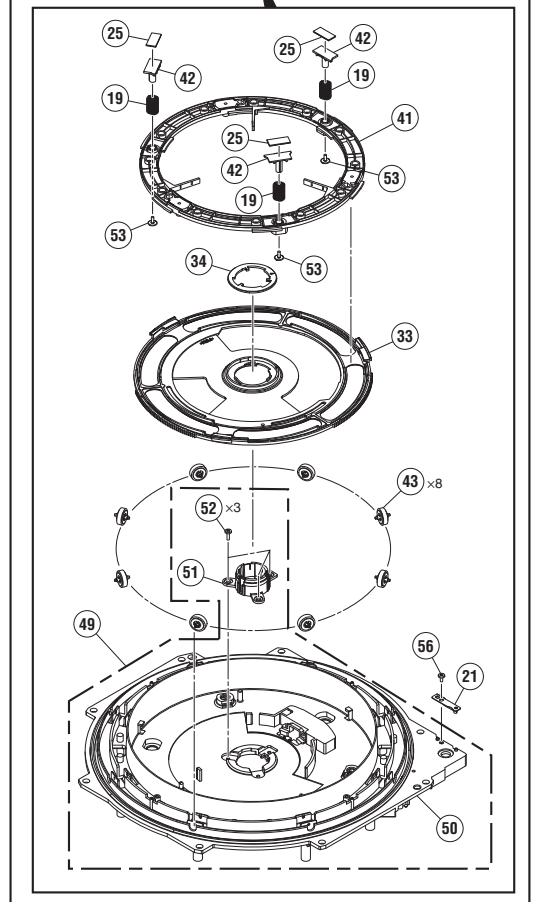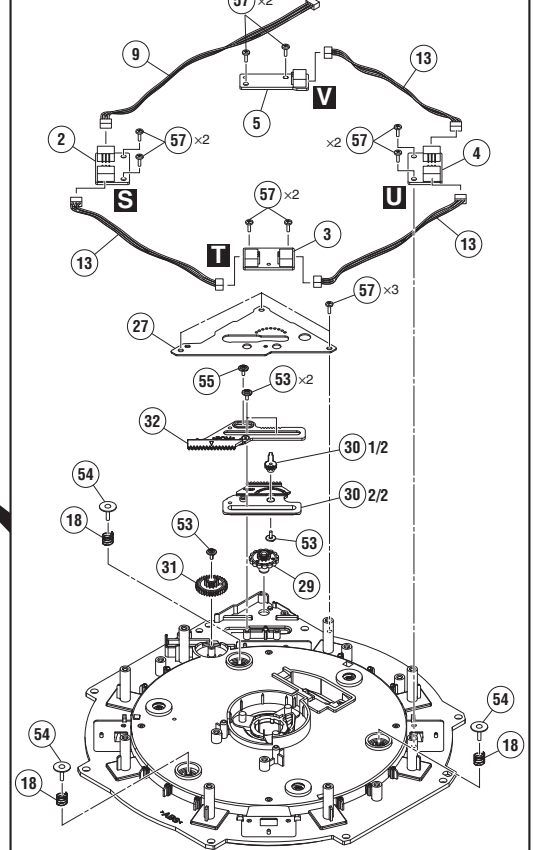

JOG DIAL SECTION PARTS LIST

	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>		<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
A	1	JLCD Assy	DWX5103		41	Base	DNK7224
	2	JILM1 Assy	DWX5107		42	Base	DNK7257
	3	JILM2 Assy	DWX5108		43	Roller	DXB2178
	4	JILM3 Assy	DWX5109		44	1..JOG LCD Holder Assy	DEA1198
	5	JILM4 Assy	DWX5110		45	2..TFT LCD	DWX4708
B	6	COIL1 Assy	DWX5113		46	2..Cover	DEC3825
	7	COIL2 Assy	DWX5114	NSP	47	2..Holder	DNK7214
	8	JOGB Assy	DWX5115		48	2..Sheet	DEC3951
	9	Connector Assy	PF03PP-B17		49	1..Jog Holder Assy	DEA1199
	10	Crimp Connector	DDC1061	NSP	50	2..Base	DNK7205
C	11	FFC	DDD1913	NSP	51	2..Shaft	DNK7206
	12	Crimp Connector	DDC1032		52	2..Screw	BPZ20P060FTC
	13	Connector Assy	PF03PP-B12		53	Screw (FE)	DBA1265
	14	Crimp Connector	DDC1034		54	Float Fastener	DBA1286
	15	Crimp Connector	DDC1033		55	Screw	DBA1461
D	16	Sensor	DSX1139		56	Screw	BPZ20P040FTB
	17	Window	DAH3206		57	Screw	BPZ20P060FTC
	18	Spring	DBH1816		58	Screw	IPZ20P060FTC
	19	Spring	DBH1859				
	20	Spring	DBH1860				
E	21	Leaf Spring	DBK1394				
	22	Cushion	DEC3807				
	23	Cushion	DEC4161				
	24	Slit	DEC4174				
	25	Brake	DED1189				
F	26	DS Tape	DEH1111				
	27	Cover	DNH3367				
	28	Holder	DNK6780				
	29	Gear	DNK6786				
	30	Gear	DNK6787				
	31	Gear	DNK6788				
	32	Gear	DNK6789				
	33	Cam	DNK7207				
	34	Lifter	DNK7208				
	35	Brake	DNK7209				
	36	Plate	DNK7210				
	37	Jog Dial	DNK7211				
	38	Jog Dial	DNK7212				
	39	Holder	DNK7213				
	40	Cover	DNK7215				

Mark	No.	Description	Part No.
A	Q	3018,3024-3027,3030	LSCR523UB
	Q	3019-3023,3028,3034	LSAR523UB
	Q	3031,3035,3036,4202	LSCR523UB
	Q	3804,4605	RTQ040P02
	Q	4203,4204	RHP020N06
■	Q	4205	LSAR523UB
	Q	4207	LTA024EEB
	Q	4402	LTC024EEB
	Q	4408	HN1A01FUS1
	Q	4603,4611	LSCR523UB
B	Q	4606	LTC023JEB
	D	201,203,411,1003	1SS355L@V
	D	202,204,3803,3804	DAN202UM
	D	207	UDZV6R8
	D	208,209,211,1002	SB060FW-30
■	D	1001,3001,3004,3010	UDZV5R6
	D	1004,1005,1010	UDZV6R2
	D	1006,1007,1009,1011	1SS355L@V
	D	1201,1351,1352	RBR1MM30A
	D	3002,3003,3005-3007	1SS355L@V
C	D	3012,4216,4217	UDZV5R6
	D	3013-3018,3802,4203	1SS355L@V
	D	4202,4204-4212	DF2B5M4CT@V
	D	4213-4215,4603,4604	1SS355L@V

MISCELLANEOUS

■	L	201-203,206 CHOKE COIL (10 uH)	CTH1486
	L	204 CHOKE COIL (4.7 uH)	CTH1480
	L	401-404 SMD FERRITE BEADS	DTF1122
	L	407,408,411,412 COIL	ATH7015
	L	413 SMD FERRITE BEADS	SZ1005F330
D	L	1001,1002 INDUCTOR (33 uH)	CTH1255
	L	3001,3401 SMD FERRITE BEADS	CTF1823
	L	3605 POWER INDUCTOR	ATH7047
	L	3802,3805 SMD FERRITE BEADS	DTF1123
	L	3803,3804,3807-3812 COIL	ATH7022
■	L	3806 SMD SPL INDUCTOR (2.2 uH)	CTH1531
	L	4201-4204 COIL	ATH7022
	L	4205,4404-4407 COIL	ATH7015
	JA	3801 RJ45 CONNECTOR	VKN2023
	JA	4201 USB JACK	DX07S024XA8
E	K	401-407 SPACER	YSMTSO-97434-ET
	KN	1001,1002 SCREW PLATE	VNE1948
	KN	1003-1005 WRAPPING TERMINAL	CKF1089
	KN	4201 STAY	DNH3641
	T	3805-3812 TRANSFORMER	DTX1012
■	X	3602,3802 CRYSTAL RESONATOR (25 MHz)	DSS1218
	X	3803 CRYSTAL RESONATOR (25 MHz)	DSS1218
	CN	401 CARD EDGE CONNECTOR	AS3B826-S55B1
	CN	404 CONNECTOR	HWW-SL0820-J1@V
	CN	1001 CONNECTOR	HWW-SR1220-J2
NSP	CN	3001,3003 14P PLUG	AKM7170
	CN	3002 CONNECTOR	CKS6207
	CN	3402,3403 FFC/FPC CONNECTOR	S100-SSA-25-T2@V
	CN	4401 FFC/FPC CONNECTOR	CKS6543
	U	4601 Wi-Fi MODULE	SX-SDMAX-2530S
F	VA	4201-4203 VARIABLE RESISTOR	AVRH10C101K1R1NE@V

RESISTORS

R	201,202	RC1206JR-070RL@V
R	204,210,223,231	RC0805JR-070RL@V

Mark	No.	Description	Part No.
R	207,270,326,421		RC0402JR-0722RL@V
	208,216,224,235		RC0402JR-070RL@V
	209,212,215,274		RC0402JR-071KL@V
R	211,213,217,1029		RC0402JR-07100KL@V
	214,314,429,3021		RC0603JR-070RL@V
	218		RC0402DR-07200KL@V
	219,229,239,1024		RC0402DR-0722KL@V
	220,221,230,246		RC0402DR-0710KL@V
R	222		RC0402DR-0724KL@V
	225,257,262,317		RC0402JR-0722KL@V
	226,249,358		RC0603JR-074K7L@V
	228,3635		RC0402DR-075K6L@V
	232,240,267,283		RC0402JR-0710KL@V
R	234,238,393		RC0402DR-0715KL@V
	237		RC0402DR-07110KL@V
	241,292,1355,3428		RC0402JR-073K3L@V
	242,265,275		RC0402DR-073K9L@V
	243,272,315,334		RC0402DR-073K3L@V
R	244,316		RC0402DR-078K2L@V
	245,302		RC0402DR-0743KL@V
	251		RC0603JR-07100KL@V
	255		RC0402DR-071K3L@V
	256,261,301,389		RC0402DR-072K7L@V
R	258,263,321,391		RC0402JR-072K2L@V
	259,266,273,279		RC0402JR-070RL@V
	260,388		RC0402DR-071K5L@V
	264,434,509,3861		RC0402JR-071K8L@V
	271,331,526,527		RC0402JR-0747RL@V
R	281,348,351,497		RC0402JR-074K7L@V
	303,1014,1033		RC0402DR-0710KL@V
	318,3065,3067,3082		RC0402JR-07220RL@V
	322,395,402,406		RC0402JR-0710KL@V
	325,356,392,516		RC0402JR-070RL@V
R	335,354,403,404		RC0402JR-07330RL@V
	355,1001,1009,1023		RC0805JR-070RL@V
	357,390,1034,1043		RC0402JR-0722KL@V
	401,409,412,424		RC0402JR-07100RL@V
	407,411,420,422		RC0402JR-072K2L@V
R	408,410,414,436		RC0402JR-0710KL@V
	415,416,445,446		RC0402JR-07330RL@V
	423,470,480,535		RC0402JR-0722RL@V
	425,428,432,435		RC0402JR-07100RL@V
	430		RC0402JR-07470RL@V
R	431,463,496,499		RC0402JR-071KL@V
	437-439,441-444		RC0402JR-07100RL@V
	440,447,448,451		RC0402JR-0710KL@V
	449,459-461,471		RC0402JR-072K2L@V
	450,452,453		RC0402JR-07100RL@V
R	454,455,3468,3471		RC0402JR-07330RL@V
	456-458,462,464		RC0402JR-07100RL@V
	465,467-469,472		RC0402JR-07100RL@V
	466,502,503,4410		RC0402JR-0710RL@V
	473,474,477,479		RC0402JR-072K2L@V
R	475,476,478,481		RC0402JR-07100RL@V
	483-488,490		RC0402JR-07100RL@V
	491,492,500,524		RC0402JR-072K2L@V
	493-495,498,501		RC0402JR-07100RL@V
	505,511,512,532		RC0402JR-0710KL@V
R	506		RC0402JR-07300RL@V

5				6				7				8			
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	R	507,1002,1016,1045	RC0402JR-0747KL@V		R	3028,3832,4217	RC0402JR-07100KL@V								
	R	508,514,515,519	RC0402JR-07100RL@V		R	3033,3045,3047,3048	RC1206JR-0722KL@V								
	R	517,1010,1031,1055	RC0402JR-070RL@V		R	3043	RC1206JR-071K5L@V								
	R	521,522,528-531	RC0402JR-07100RL@V		R	3044,3064,3071,3077	RC0402JR-0747RL@V								
					R	3046,3078-3081,3085	RC0402JR-0722KL@V								
	R	523,1039,3034,4436	RC0402JR-071KL@V												
	R	533,539,540	RC0402JR-0710KL@V		R	3050-3059,3070,3073	RC0402JR-070RL@V								
	R	534,536,593,595	RC0402JR-074K7L@V		R	3061,3062,3075,3088	RC0402JR-0710KL@V								
	R	537,1008,1022,1026	RC0402JR-0722RL@V		R	3063,3066,3068,3076	RC0402JR-073K9L@V								
	R	541,554,555,579	RC0402JR-072K2L@V		R	3083,3123,3401,3448	RC0402JR-070RL@V								
					R	3084,3087	RC0402JR-073K9L@V								
	R	545,568-573	RC0402JR-07100RL@V												
	R	575-577,589,590	RC0402JR-07100RL@V		R	3086	RC0402JR-07220RL@V								
	R	580-582,585,587	RC0402JR-0710KL@V		R	3091,3092,3119-3122	RC0603JR-076K8L@V								
	R	586,599,602,1036	RC0402JR-072K2L@V		R	3095,3103,3104,4229	RC0402JR-0722KL@V								
	R	607-614,3455,3456	RC0402JR-07100RL@V		R	3097	RC0603JR-0710KL@V								
					R	3111,3115,3637-3639	RC0402JR-0710KL@V								
	R	1003,1004,1006,1007	RC1206JR-072R7L@V												
	R	1005,1019,1071,1072	RC0402JR-074K7L@V		R	3112-3114,4412,4448	RC0402JR-071K5L@V								
	R	1011,1030	RC0603JR-0722RL@V		R	3116-3118,3453,3470	RC0402JR-0747RL@V								
	R	1012	RC0402DR-07820RL@V		R	3126-3128	RC0402JR-072M2L@V								
	R	1013,1064,1067	RC0402DR-0747KL@V		R	3457,3458,3633,3654	RC0402JR-070RL@V								
					R	3461,3462,3469	RC0402JR-07150RL@V								
	R	1015	RC0402JR-0768KL@V												
	R	1017,1018,1020,1021	RC1206JR-072R7L@V		R	3601,3640-3642,3646	RC0402JR-07100RL@V								
	R	1027,1038,1056,1069	RC0805JR-070RL@V		R	3636	RC0402DR-07430RL@V								
	R	1028	RC0805JR-071RL@V		R	3643-3645,3651,3653	RC0402JR-0710KL@V								
	R	1032	RC0402DR-0727KL@V		R	3647,3655,3801,3843	RC0402JR-074K7L@V								
					R	3648-3650,3836,3837	RC0402JR-07100RL@V								
	R	1035	RC0402JR-0739KL@V												
	R	1037	RC0402JR-0715KL@V		R	3656,3657,3831,3872	RC0402JR-0710KL@V								
	R	1041,1052-1054	RC0402JR-0722RL@V		R	3658,3839-3842	RC0402JR-070RL@V								
	R	1042,1044,1046,1049	RC0402JR-0710KL@V		R	3827-3830,3879-3882	RC0603JR-0775RL@V								
	R	1047,1050,1214,1361	RC0402JR-0733KL@V		R	3835,4449	RC0402JR-073K3L@V								
					R	3844-3847,4203,4227	RC0402JR-070RL@V								
	R	1048,1051,4222,4223	RC0402JR-0747KL@V												
	R	1057,3838,4205,4414	RC0402JR-072K2L@V		R	3848,3865	RC0402FR-072K49L@V								
	R	1058-1062,1068,1076	RC0402JR-0722RL@V		R	3849-3851,3853,3856	RC0402JR-074K7L@V								
	R	1063,1075,1216,1354	RC0402JR-070RL@V		R	3857,3860,3862,3864	RC0402JR-07100RL@V								
	R	1065,1066	RC0402JR-075K1L@V		R	3858,3866-3871,4402	RC0402JR-074K7L@V								
					R	3873	RAB4CQ472J								
	R	1070,1201,1215,1356	RC0402JR-0710KL@V												
	R	1073,4220,4401,4408	RC0805JR-070RL@V		R	3876,3883,4204,4207	RC0402JR-0710KL@V								
	R	1079-1094,3032	RC1206JR-07100RL@V		R	4206,4415,4639,4641	RC0402JR-07100RL@V								
	R	1095	RC0402JR-075K6L@V		R	4209,4210,4213,4218	RC0402JR-0710KL@V								
	R	1096,1369,3002,3031	RC0402JR-0722KL@V		R	4214	RC0402DR-07120KL@V								
					R	4215	RC0402DR-074K3L@V								
	R	1097,1098,1106,1107	RC0603JR-071KL@V												
	R	1099-1105	RC1206JR-071KL@V		R	4219	RC1206JR-0710RL@V								
	R	1202,1365-1367,3026	RC0402JR-0722RL@V		R	4226,4228,4230,4409	RC0402JR-0722RL@V								
	R	1352	RC0402DR-073K3L@V		R	4231,4235,4640	RC0402JR-0722KL@V								
	R	1353	RC0402DR-07240RL@V		R	4233,4237,4245,4416	RC0402JR-070RL@V								
					R	4234,4236,4238,4471	RC0402JR-0710KL@V								
	R	1357,1362,3008,3029	RC0402JR-0710KL@V												
	R	1358,1359	RC0402JR-0751KL@V		R	4403	RC0402JR-0747KL@V								
	R	1368,3001,3072,3074	RC0402JR-074K7L@V		R	4404-4407	RC1206JR-072R7L@V								
	R	3003,3004,3124	RC0402JR-07180RL@V		R	4411	RC0402JR-0710RL@V								
	R	3005,3013	RC0402DR-071K8L@V		R	4413,4454,4456	RC0402JR-074K7L@V								
					R	4417,4433,4442,4443	RC0402JR-070RL@V								
	R	3006	RC0603DR-07680RL@V												
	R	3007	RC0402DR-0768RL@V		R	4419	RC0603DR-0718RL@V								
	R	3009,3012,3049,3125	RC0402DR-0722KL@V		R	4420,4430,4431	RC0603DR-0722RL@V								
	R	3010,3038-3040,3042	RC1206JR-071K5L@V		R	4439	RC0402JR-076K8L@V								
	R	3011,3017,3030	RC0402JR-070RL@V		R	4455,4457,4601,4637	RC0402JR-072K2L@V								
					R	4458-4465,4467,4468	RC0402JR-070RL@V								
	R	3014	RC0603DR-07560RL@V												
	R	3015,3018	RC0402DR-0782RL@V		R	4466	RC0402DR-07270RL@V								
	R	3019,3023-3025,3041	RC0402JR-0747RL@V		R	4473,4607,4626,4627	RC0402JR-0710KL@V								
	R	3022,3652,3852,4232	RC0603JR-070RL@V		R	4602,4611-4614	RC0402JR-0722RL@V								
	R	3027,3459,3460,3834	RC0402JR-0722RL@V		R	4608	RC0402JR-07680RL@V								

Mark No. Description
Part No.
Mark No. Description
Part No.

A	R 4617-4619	RC0402JR-0722RL@V
	R 4628	RC0402DR-076K8L@V
	R 4629,4631,4638	RC0402JR-0710KL@V
	R 4630,4636,4643,4644	RC0402JR-070RL@V
	R 4642	RC0402JR-072K2L@V
	R 4645	RC0402DR-0739KL@V
	R 4646	RC0402JR-072K7L@V

CAPACITORS

C 201,222	0603X225K250CT
C 202,216,224,235	0402B103K500CT
C 204,1017,1018,3414	0402N102J500CT
C 205,278,368,457 (0.1 uF)	ACE7100
C 206 (0.1 uF)	ACE7097

C 207,209,226,227	0805X106K250CT
C 208,212,230,237	0402B104K250CT
C 210,215,217,223	0402B102K500CT
C 213,220,225,232	0402B104K160CT
C 214,238,384,1025	0402B472K500CT

C 228,263,286,290 (100 uF/16 V)	DCH1365
C 229,265	0805X226M250CT
C 231,234,239,249	0402B102K500CT
C 233,294,360,382	0603B105K160CT
C 236	0603B104K160CT

C 240,381,386,1009	0402B331K500CT
C 241,245,367,370	0805X106K100CT
C 244,369,4418,4432	0402X105K100CT
C 247,298,300,371	0402B332K500CT
C 252,256,259,268	0805X106K250CT

C 253,262,264,270	0402B104K160CT
C 255,260,302,311	0402B104K250CT
C 257,269,272,279	0402B102K500CT
C 271,273,283,292	0805X106K250CT
C 274,401,1010,1014	ACE7129

C 275 (100 uF/6.3 V)	ACH7275
C 277,285,345,407	0402N100J500CT
C 281,295,314,317	0402B104K160CT
C 284,341,351,390	0402B103K500CT
C 288	0402B224K250CT

C 297,366,1034,1059 (100 uF/16 V)	DCH1365
C 299,335,338,357	0805X106K250CT
C 305,329,342,374	0402B102K500CT
C 332,363,404,408	0402B104K160CT
C 373	0402B332K500CT

C 375,377,383,387 (0.01 uF)	ACE7113
C 378,1040	0805B105K250CT
C 379,385,405,410	0402B102K500CT
C 402,4615,4617	0402B103K160CT
C 403,432,3657,3660	0805X106K250CT

C 406,1005,1013,1073	0402N101J500CT
C 409,411,414-417	0402B104K160CT
C 418,425,429,431	0402N100J500CT
C 424,426-428,430	0402B104K160CT
C 433,458,3010,3836	0603X105K160CT

C 434,1001,1002,1006	0402B104K160CT
C 436-442,453,1007	0402B102K500CT
C 1003,1004,1024,1026	0805X106K160CT
C 1008,1015	0402N331J500CT
C 1011,1032,1036,1048	0402B102K500CT

C 1012,1016,1050,1051	0603B104K250CT
C 1019,1041,1047,1054	0402B103K500CT
C 1020,3435,4448 (0.01 uF)	ACE7113
C 1021,1031,1033,1037	0402B104K160CT
C 1022,1023,1029,1058 (0.1 uF)	ACE7100

C 1027,1064 (0.47 uF)	ACE7114
C 1028,1035,1060 (220 uF/16 V)	DCH1368
C 1030,1066,4644 (1 uF)	ACE7129
C 1039,1042,1044,1046	0402B104K160CT
C 1043,1045,1052	0805X106K160CT

C 1049,1063,1069,1070	0402B104K160CT
C 1053	0603B103K500CT
C 1056,1062,3030,3032	0402B102K500CT
C 1057 (470 uF/16 V)	CCH1680
C 1061,1065,3001,3674	0402B103K500CT

C 1072,1074,1075,3436	0402B472K500CT
C 1076,1077,4435	0603B105K160CT
C 1078,1080,4221	0603B104K500CT
C 1079,4631	0603X105K250CT
C 1081,4210-4213,4224	0603B104K250CT

C 1082,3437	0402B331K500CT
C 1083 (0.1 uF)	ACE7100
C 1090,1215-1226	0402B104K160CT
C 1231-1236,1351,3026	0402B104K160CT
C 1352 (220 uF/16 V)	DCH1391

C 3002,3039,3043,4401	0402B103K250CT
C 3003,3006,3007,4206	CC0402KRX7R7BB104
C 3005,4613,4618,4633	CC0402KRX7R9BB102
C 3008	CC0402KRX5R5BB224
C 3024	0603X474K250CT

C 3029,3033,3409,3415	0402B104K160CT
C 3034,3040,3044,3408	0402B102K500CT
C 3401-3407,3835,3901	0402N101J500CT
C 3416,3418,3420,3425	0402N102J500CT
C 3417,3419,3421,3423	0402B104K160CT

C 3424,3426,3428,3441	0402B104K160CT
C 3429,3433,3434,3440	0402N102J500CT
C 3439	0603X474K160CT
C 3633-3641,3644-3648	0402B104K160CT
C 3642,3672,3863	0402N100J500CT

C 3643,3853,3876,3890	0402N120J500CT
C 3653-3656,3658,3659	0402B104K160CT
C 3661,3663-3667,3669	0402B104K160CT
C 3662,3894,3903	0603X475K6R3CT
C 3668,3670,3839,3844	0805X106K250CT

C 3671,3673,3842,3849	0402B104K160CT
C 3833,3834,3912,3913 (1000 pF)	ACG1127
C 3837,3843,3845-3848	0402B103K500CT
C 3840,3884,3897,3900	0603X105K160CT
C 3841 (100 uF/16 V)	DCH1365

C 3850,3854,3857,3859	0402B103K500CT
C 3851,3852,3855,3856	0402B104K160CT
C 3858,3860,3864,3865	0402B104K160CT
C 3861,3862,3866,3867	0402B103K500CT
C 3868,3869,3874,3875	0402B104K160CT

C 3870-3873,3885-3889	0402B103K500CT
C 3877,3904,3906,3910	0805X106K250CT
C 3878-3883,3891-3893	0402B104K160CT
C 3895,3898,4623,4642	0402B103K500CT
C 3896,3899,3902,3905	0402B104K160CT

5	6	7	8
Mark	No. Description	Part No.	Mark No. Description Part No.
	C 3907,3909,3911,4202	0402B104K160CT	IC 5302 SN74AHC04PWR
	C 3908,4209,4606-4608	0603X105K160CT	IC 5401 ES9017S
	C 4204,4207,4219,4220	0402B104K160CT	IC 5402,5403 NJM8801E
	C 4205,4614,4616	0402N102J500CT	IC 5404,5405 OPA1662AID
	C 4208	0805X106K250CT	Q 5001-5005 LSCR523UB
	C 4214-4217	0603B334K250CT	Q 5401,5402 2SK3320
	C 4222	1206X225K500CT	Q 5403,5404 HN1C01FUS1
	C 4225,4227	0603B102K500CT	Q 5405-5408 INC2002AC1
	C 4228	0603B104K250CT	D 5001,5002,5004,5006 1SS355L@V
	C 4404,4419-4426	0402B104K160CT	D 5003,5005,5009,5012 UDZV5R1
	C 4417	0402N151J500CT	D 5007 UDZV6R2
	C 4427-4431,4433	0402B102K500CT	D 5008,5011,5013,5015 1SS355L@V
	C 4436-4447	0402B104K160CT	D 5010,5020,5021,5025 RB501VM-40
	C 4603-4605	0805X226M100CT	D 5014,5016 UDZV5R1
	C 4609-4612	CC0402KRX7R7BB104	D 5026 RB501VM-40
	C 4619,4620	CC0402JRNPO9BN101	D 5301-5304,5403,5404 EZAEG2N50A
	C 4625,4630	0603X105K160CT	
	C 4643	0402B103K500CT	
DIFB ASSY			
Consists of			
USBA ASSY			
USBC ASSY			
B C			
DIFB ASSY			
SEMICONDUCTORS			
	D 4605-4607,4702,4703	EZAEG2N50A	
	D 4706,4707	EZAEG2N50A	
MISCELLANEOUS			
	L 4603,4703 COIL	ATH7015	
	JA 4601 USB JACK	DKN1684	
NSP	JA 4701 USB JACK	DKN1694	
	KN 4601 WRAPPING TERMINAL	CKF1089	
	KN 4702 STAY	DNG1155	
	CN 4601,4701 14P SOCKET	AKP7248	
	VA 4701-4703 VARIABLE RESISTOR	AVRH10C101K1R1NE@V	
RESISTORS			
	R 4701,4702	RC0402JR-070RL@V	
CAPACITORS			
	C 4601	0805X106K100CT	
	C 4602	0402B104K160CT	
	C 4603,4703	0402B102K500CT	
	C 4701	1210B106K500CT	
	C 4702	0603B104K500CT	
D AUDB ASSY			
SEMICONDUCTORS			
⚠	IC 5001,5005	MM1899A50N	
⚠	IC 5002	NJM78M09DL1A	
⚠	IC 5003	BD9E105FP4-Z	
⚠	IC 5004	SGM2209-ADJXN5G	
⚠	IC 5006,5201	MM1899A33N	
⚠	IC 5007	MM3571A12P	
⚠	IC 5008-5010	UA78M33IKVUG3	
	IC 5202,5203	TC7SH08FUS2	
	IC 5204	74VHC157FT	
	IC 5301	PCM9211PT@V	
	IC 5302		
	IC 5402,5403		
	IC 5404,5405		
	Q 5001-5005		
	Q 5401,5402		
	Q 5403,5404		
	Q 5405-5408		
	D 5001,5002,5004,5006		
	D 5003,5005,5009,5012		
	D 5007		
	D 5008,5011,5013,5015		
	D 5010,5020,5021,5025		
	D 5014,5016		
	D 5026		
	D 5301-5304,5403,5404		
MISCELLANEOUS			
	L 5001 POWER INDUCTOR (0.22 mH)	ATH7053	
	L 5201,5202 SMD FERRITE BEADS	DTF1130	
	JA 5301 1P PIN JACK	PKB1045	
	JA 5401 RCA JACK	DKB1120	
	KN 5001,5002 SCREW PLATE	VNE1948	
NSP	X 5201 CRYSTAL OSCILLATOR (22.5792 MHz)	DSS1232	
NSP	X 5202 CRYSTAL OSCILLATOR (24.576 MHz)	DSS1225	
	CN 5001 CONNECTOR	HHW-SR0320-J1@V	
	CN 5002,5003 FFC/FPC CONNECTOR	S100-SSA-25-T2@V	
	VL 5301 TRANSFORMER	DTX1016	
RESISTORS			
	R 5001,5022	RC0402JR-0733KL@V	
	R 5002,5023,5309	RC0402JR-0710KL@V	
	R 5003,5025	RC0402JR-0747KL@V	
	R 5004-5019,5026,5044	RC0402JR-0722RL@V	
	R 5020,5021,5201,5202	RC0402JR-070RL@V	
	R 5024	RC0402JR-0722KL@V	
	R 5027-5030	RC0402JR-0751KL@V	
	R 5037	RC0402JR-072K2L@V	
	R 5038,5457,5458,5461	RC0402JR-071KL@V	
	R 5039	RC0603DR-0712KL@V	
	R 5040	RC0603DR-0710KL@V	
	R 5041	RC0603DR-0768KL@V	
	R 5045	RC0402DR-076K8L@V	
	R 5046	RC0402DR-0756KL@V	
	R 5047	RC0402DR-0775KL@V	
	R 5051,5333-5335	RC1206JR-070RL@V	
	R 5065-5068,5232,5233	RC1206JR-071KL@V	
	R 5203,5204	RC0402JR-07100KL@V	
	R 5205,5206,5211,5306	RC0402JR-0747RL@V	
	R 5207,5208,5325-5332	RC0603JR-070RL@V	
	R 5209,5213	RC0402JR-07330RL@V	
	R 5210,5214,5216	RC0402JR-070RL@V	
	R 5212,5215	RT0603DRD07150RL@V	
	R 5223-5225,5307,5308	RC0402JR-070RL@V	
	R 5301,5302,5401,5402	RC0402JR-0722RL@V	
	R 5303,5304,5310,5312	RAB4CQ103J	
	R 5305	RC0603JR-07680RL@V	
	R 5311	RC0402DR-07100RL@V	
	R 5313,5316-5319,5404	RC0402JR-07100RL@V	
	R 5314	RC0402JR-070RL@V	

Mark No. Description**Part No.****Mark No. Description****Part No.**

R 5315 RC0402JR-07680RL@V
 R 5322 RC0603JR-07330RL@V
 R 5323 RC0603JR-07100RL@V
 R 5406,5414 RT0603DRD072KL@V
 R 5407,5415 RT0603DRD07750RL@V

R 5408,5416,5425-5428 RC0603JR-070RL@V
 R 5417-5420,5429-5436 RT0603DRD07470RL@V
 R 5421-5424 RT0603DRD07220RL@V
 R 5437-5440 RT0603DRD072K7L@V
 R 5441,5443 RC0402JR-07390RL@V

R 5447-5450 RT0603DRD072K2L@V
 R 5451,5452,5454 RC0402JR-07470RL@V
 R 5453 RC0402JR-0711KL@V
 R 5455,5456 RC0603JR-0747KL@V
 R 5459,5460,5463,5464 RT0603DRD07270RL@V

R 5462 RC0402JR-071KL@V

CAPACITORS

C 5001,5011,5026-5028 0402B103K500CT
 C 5002,5055,5056,5107 (0.1 uF) ACE7100
 C 5003,5021,5060,5064 (100 uF/16 V) DCH1365
 C 5004,5005,5007,5008 0402B104K160CT
 C 5006,5045 0603B105K160CT

C 5009,5013,5030-5032 0402N102J500CT
 C 5010,5012,5014,5020 0402B104K160CT
 C 5015,5016,5025,5318 0805X106K160CT
 C 5019,5098 0603X225K100CT
 C 5023,5024,5038,5049 0603B104K250CT

C 5029,5037,5075,5201 0402B104K160CT
 C 5033,5034 0603B334K250CT
 C 5035 0402B104K250CT
 C 5036,5078-5080 0603X334K250CT
 C 5039,5043,5044,5210 0402N101J500CT

C 5040,5046,5047,5066 0402N102J500CT
 C 5042,5050,5053,5063 0402B103K500CT
 C 5051,5052 (0.01 uF) ACE7113
 C 5061,5062 (0.47 uF) ACE7114
 C 5065,5094,5319 (100 uF/16 V) DCH1365

C 5067,5071,5081-5083 0402B103K500CT
 C 5068,5073 0603X225K160CT
 C 5070,5090 0603X474K160CT
 C 5072,5084-5087,5091 0402N102J500CT
 C 5088,5089,5093,5101 0402B103K500CT

C 5097,5099,5100 0402N102J500CT
 C 5102,5104,5204-5206 0402B103K500CT
 C 5103,5404,5409,5435 0603B103K500CT
 C 5109-5111 (0.1 uF) ACE7100
 C 5202,5215,5220,5227 0402B104K160CT

C 5203,5219 0603X105K160CT
 C 5207-5209,5213,5217 0402N102J500CT
 C 5211,5218,5223,5224 0402N101J500CT
 C 5212,5214,5216,5221 0402B103K500CT
 C 5222,5225,5232,5236 0402N102J500CT

C 5226,5231,5235,5239 0402B103K500CT
 C 5230,5234,5238,5317 0402B104K160CT
 C 5233,5237,5241,5322 0402N101J500CT
 C 5240,5307,5313,5320 0402N102J500CT
 C 5301 1206N683J500CT

C 5302,5408 0603N472J500CT
 C 5303,5305 0603B104K250CT

C 5304,5306 0603X106K6R3CT
 C 5308,5309,5314,5321 0402B103K500CT
 C 5312,5328,5329 0402B472K500CT

C 5316 0603B104K500CT
 C 5323,5441,5445,5452 0402N331J500CT
 C 5324,5405,5410,5411 0402N102J500CT
 C 5325,5485-5488 0402B104K160CT
 C 5326 0402B224K160CT

C 5327 CEVW100M16
 C 5401,5407,5430,5443 0805B105K250CT
 C 5402,5417,5421 (1 uF) ACE7129
 C 5403,5419,5426 (0.01 uF) ACE7097
 C 5413,5425,5429,5440 0402N101J500CT

C 5415 0402B103K500CT
 C 5416,5428 VGV476M6R3ANC01K
 C 5418,5422 0805B474K160CT
 C 5424,5427,5436,5438 0402N102J500CT
 C 5439,5473,5478 0603B103K500CT

C 5442,5446,5453,5456 0402N102J500CT
 C 5444,5451,5454,5459 0402N101J500CT
 C 5450 0805B105K250CT
 C 5455,5460,5463,5468 0402N331J500CT
 C 5457,5458,5465,5466 CFHXS153J16

C 5461,5464,5469,5472 0402N102J500CT
 C 5462,5467,5470,5479 0402N101J500CT
 C 5471,5480,5483,5490 0402N331J500CT
 C 5474-5477 (2200 pF) ACE7116
 C 5481,5484,5491,5494 0402N102J500CT

C 5482,5489,5492,5501 0402N101J500CT
 C 5493,5502,5505,5508 0402N331J500CT
 C 5495-5498 CFHXSQ472J16
 C 5499,5500 0603N222J500CT
 C 5503,5506,5509,5520 0402N102J500CT

C 5504,5507,5518,5522 0402N101J500CT
 C 5510-5513,5521,5525 0402B104K160CT
 C 5514,5515 (220 uF/16 V) DCH1368
 C 5516,5517 CFHXSQ152J50
 C 5519,5523 0402N331J500CT

C 5524 0402N102J500CT
 C 5526,5527 DCH1360
 C 5528-5530 0402B472K500CT

SUBA ASSY**Consists of****SUB1 ASSY****SUB2 ASSY****SLDB ASSY****PWSW ASSY****CONB ASSY****E J K M P****SUBA ASSY****SEMICONDUCTORS**

Q 8000,8001 LSCR523UB
 Q 8002-8009,8200-8208 LTC114YUB
 Q 8400 LTC124EUB
 D 8000-8002 SLI-343Y8Y
 D 8003,8004,8201,8207 LTL17KSL5D-P

D 8005,8006,8200,8206 SLR343WBN2PT(Z)@V
 D 8007,8205 LTL17KRH5D-P

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	D	8202,8203,8208	LTL17KTBP5D@V			PNLA ASSY	
	D	8204	LTL17KGH5D-P			Consists of	
	D	8400	SLR343WBN2PT(Z)@V			JLCD ASSY	
						PNLB ASSY	A
						KSWB ASSY	
						JILM1 ASSY	
						JILM2 ASSY	
						JILM3 ASSY	
						JILM4 ASSY	
						NFCB ASSY	
						F H L O S T U V	
						PNLA ASSY	
						SEMICONDUCTORS	
				⚠	IC	7000	MM1856A50N
				⚠	IC	7001	MM1899A33N
					IC	7002	74AHC1GU04SE
					IC	7002	TC7SHU04FUS2
					IC	7003	BU90R104
					IC	7004,7007	U74LVC74AG-P14
					IC	7005	U74LVC1G08G-AL5
					IC	7005	TC7SZ08FUS2
					IC	7006	74LCX04FT
					IC	7200	U74AHC00G-P14
					IC	7200	74VHC00FT
					IC	7201	U74AHC32G-P14
					IC	7202	DYW2405*
					*Part number of the initial firmware equipped		
					IC	7203	MIMXRT1021DAG5B@V
					IC	7204,7205	S-80930CNMC-G80
					IC	7206	IS31FL3236AQFLS2
					IC	7207-7209	74VHC595FT
					IC	7207-7209	U74AHC595G-P16
					IC	7900	ST25DV04KC-IE6T3
					Q	7000,7202,7204,7207	LTC024EEB
					Q	7001,7206	LTA024EEB
					Q	7002	RHP020N06
					Q	7003,7005	LSCR523UB
					Q	7004,7700,7701,7703	LSAR523UB
					Q	7203,7205	ISA1602AM1
					Q	7209,7211,7212,7600	LTC023JEB
					Q	7215,7218,7220-7222	SSM3J331R
					Q	7223,7224	LTA023JEB
					Q	7704,7750,7751,7753	LSAR523UB
					Q	7754,7800,7801,7803	LSAR523UB
					Q	7804,7850,7851,7853	LSAR523UB
					Q	7854	LSAR523UB
					D	7000,7009,7011	1SS355L@V
					D	7001-7008	EZAEG2N50A
					D	7200-7240,7246-7248	UDZV5R6
					D	7251-7266	UDZV5R6
					D	7267	UDZV3R6
					D	7268,7269	TPD1E01B04DPY
					D	7268,7269	DF2B5M4CT@V
					D	7270,7277-7279	ASMB-6W020C108@V
					D	7271,7272,7276	EZJZ1V270RM
					D	7275,7282,7600-7603	DEL1078
					D	7280,7281,7700,7750	QSMC-C198
					D	7283-7288,7604,7605	ASMB-6W020C108@V
					D	7289-7298	1SS355L@V
					D	7702,7752,7802,7852	DEL1078

Mark	No.	Description	Part No.
	D	7800,7850	QSMC-C198
	D	7900	ASMY-CWGO-NX7A2

Mark	No.	Description	Part No.
	R	7086,7225-7227	RC0402JR-0722RL@V
	R	7200-7219,7222-7224	RC0402JR-071KL@V

MISCELLANEOUS

L	7000,7026	CHIP BEEDS FILTER	BTX1047
L	7001,7002	CHIP SOLID INDUCTOR	XTL3010
L	7003-7015	SMD FERRITE BEADS	DTF1130
L	7017,7018	SMD FERRITE BEADS	DTF1130
L	7020-7022	SMD FERRITE BEADS	DTF1130

L	7024,7025	SMD FERRITE BEADS	DTF1130
L	7200-7202	CHIP BEEDS FILTER	BTX1042
L	7205,7206	CHIP BEEDS FILTER	BTX1042
L	7207	SMD FERRITE BEADS	DTF1123
L	7208	POWER INDUCTOR (4.7 uH)	ATH7047

KN	7205-7207	WRAPPING TERMINAL	CKF1089
S	7201-7204,7210	TACTILE SWITCH	DSG1158
S	7205-7209,7211,7213	PUSH SWITCH	CSG1155
S	7212,7214,7216	TACTILE SWITCH	DSG1158
S	7215,7217,7600-7603	PUSH SWITCH	CSG1155

S	7604,7605	TACTILE SWITCH	DSG1158
X	7000	CRYSTAL RESONATOR (8 MHz)	CSS1886
X	7200	CRYSTAL RESONATOR (24.000 MHz)	DSS1241
CN	7000,7204	FFC/FPC CONNECTOR	CKS6641
CN	7001,7206	CONNECTOR	HWW-SL09-150-J1

CN	7002	CONNECTOR	HWW-SL03-150-J1
CN	7003	CONNECTOR	HWW-SL02-150-J1
CN	7004,7200	FFC/FPC CONNECTOR	CKS6646
CN	7201	FFC/FPC CONNECTOR	S100-DRF-23-T5
CN	7202,7203	FFC/FPC CONNECTOR	CKS6638

CN	7205,7600	FFC/FPC CONNECTOR	CKS6638
CN	7207	CONNECTOR	HWW-SL04-150-J1
CN	7208,7700,7701,7750	CONNECTOR	HWW-SR0320-J1@V
CN	7209	FFC/FPC CONNECTOR	S100-SSA-17-T2@V
CN	7210	FFC/FPC CONNECTOR	S100-SSA-09-T2@V

CN	7751,7800,7801,7850	CONNECTOR	HWW-SR0320-J1@V
CN	7900	CONNECTOR	HWW-SL0820-J1@V

RESISTORS

R	7000-7003,7072-7076	RC1206JR-0756RL@V
R	7004-7007	RC0402DR-07100RL@V
R	7008,7013-7016,7043	RC0402JR-0710KL@V
R	7009-7012,7017-7020	RC0402JR-070RL@V
R	7021,7064,7065,7067	RC0402JR-07220RL@V

R	7022	RC0402JR-071ML@V
R	7023,7025,7026,7030	RC0402JR-07470RL@V
R	7024,7027,7029,7031	RC0402JR-073K3L@V
R	7032-7040,7053,7054	RC0402JR-07470RL@V
R	7042,7045-7047	RC0402JR-0768RL@V

R	7044	RC0402JR-0747RL@V
R	7048	RC0402JR-07180RL@V
R	7049-7051	RC0402JR-0768RL@V
R	7056-7058,7060	RC0402JR-07470RL@V
R	7061,7062,7079	RC0402JR-071KL@V

R	7063,7088-7091,7228	RC0402JR-07330RL@V
R	7066	RC1206JR-070RL@V
R	7068,7083	RC0402JR-07220RL@V
R	7069	RC1206JR-0747RL@V
R	7071,7078,7084,7085	RC0402JR-0722KL@V

R	7077,7236,7285,7291	RC0402JR-074K7L@V
R	7081	RC0402JR-0715KL@V
R	7082	RC0402JR-0747KL@V

R	7220,7221,7369-7372	RC0805JR-070RL@V
R	7229-7232,7235,7237	RC0402JR-0722RL@V
R	7233,7256,7257,7324	RC0402JR-07100RL@V
R	7234,7277,7280	RC0402JR-07330RL@V
R	7238,7242-7255,7258	RC0402JR-071KL@V

R	7241,7262,7265	RC0603JR-0756KL@V
R	7259,7266-7269,7320	RC0402JR-071KL@V
R	7260,7263	RC0603JR-071K8L@V
R	7261,7264	RC0603JR-0722KL@V
R	7270-7272,7286-7290	RC0402JR-0710KL@V

R	7273-7276,7278,7279	RC0402JR-0722RL@V
R	7281-7284,7300,7309	RC0402JR-0722RL@V
R	7292,7293,7295,7299	RC0402JR-0710KL@V
R	7294,7297,7398,7406	RC0402JR-074K7L@V
R	7296,7409,7601	RC0402JR-073K9L@V

R	7298,7323,7330,7333	RC0402JR-070RL@V
R	7302,7305-7308	RC0402JR-0710KL@V
R	7303,7304,7325,7331	RC0402JR-0722KL@V
R	7310,7316,7318,7352	RC0402JR-0722RL@V
R	7311-7315,7317,7319	RC0402JR-0710KL@V

R	7321	RC0402JR-072K2L@V
R	7322,7327,7339-7344	RC0402JR-0710KL@V
R	7326,7328,7329,7332	RC0402JR-07100RL@V
R	7334,7336-7338	RC0402JR-07100RL@V
R	7335,7346,7347,7413	RC0402JR-0722KL@V

R	7345,7354,7364,7440	RC0402JR-070RL@V
R	7348,7412,7434,7446	RC0402JR-0710KL@V
R	7349-7351,7363,7415	RC0402JR-07100RL@V
R	7353,7416,7431,7437	RC0402JR-0722RL@V
R	7355,7357,7358,7365	RC0603JR-070RL@V

R	7356,7368,7903	RC0402JR-07100KL@V
R	7362	RC0402JR-072M2L@V
R	7366	RC0603JR-070RL@V
R	7367,7381,7422-7426	RC0402JR-071KL@V
R	7373	RC0603JR-07100RL@V

R	7378-7380,7382-7385	RC0805JR-070RL@V
R	7390-7393	RC0805JR-070RL@V
R	7399,7407	RC0402JR-078K2L@V
R	7402,7403	RC0603JR-07330RL@V
R	7404,7405,7604-7607	RC0603JR-073K9L@V

R	7408	RC0402JR-076K8L@V
R	7410,7602	RC0402JR-075K6L@V
R	7411,7600	RC0402JR-073K3L@V
R	7414,7417,7419,7432	RC0402JR-074K7L@V
R	7418,7430,7433,7436	RC0402JR-07100RL@V

R	7435,7438	RC0402JR-074K7L@V
R	7439	RC0402JR-07100RL@V
R	7444,7706,7756,7806	RC0603JR-0768RL@V
R	7445	RC0603JR-071K5L@V
R	7447	RC0402JR-0710KL@V

R	7700,7704,7750,7754	RC0603JR-0747RL@V
R	7701,7705,7751,7755	RC0603JR-07470RL@V
R	7702,7752,7802,7852	RC0603JR-0782RL@V
R	7800,7804,7850,7854	RC0603JR-0747RL@V
R	7801,7805,7851,7855	RC0603JR-07470RL@V

R	7856	RC0603JR-0768RL@V
R	7904-7906,7917	RC0402JR-0722RL@V

5	6	7	8		
Mark	No. Description	Part No.	Mark	No. Description	Part No.
CAPACITORS			C	7338,7347,7349,7351	0402B104K160CT
C	7000,7006,7018,7021	0402B104K160CT	C	7339	0402X224K250CT
C	7001,7002,7004,7005	0402N102J500CT	C	7344,7345,7361,7379	0402N102J500CT
C	7003,7014,7016,7022	0402B103K160CT	C	7348,7356	0402N5R0C500CT
C	7007,7011,7019,7024	0603X105K250CT	C	7350 (0.1 uF)	ACE7100
C	7008,7046,7242,7342	0805X106K250CT	C	7353,7365	0603X105K160CT
C	7012,7051,7053,7236	0402N101J500CT	C	7359,7905	0603X475K6R3CT
C	7015,7017,7049,7056	0402N102J500CT	C	7363,7364,7372,7378	0402B104K160CT
C	7020,7240 (0.1 uF)	ACE7129	C	7377	VG7476M016ANE01K
C	7023,7030,7033,7036	0402B103K160CT	C	7384	0402N561J500CT
C	7025,7026,7028,7029	0402B104K160CT	C	7385,7390,7926	0805X226M100CT
C	7027,7032	0402N100J500CT	C	7386,7389,7396,7400	0402B104K160CT
C	7031	0603X225K100CT	C	7387,7388,7397,7410	0402N102J500CT
C	7034,7035,7037,7038	0402B104K160CT	C	7392	0805X106K250CT
C	7039,7080,7245,7276	0402B103K160CT	C	7398	0402B331K500CT
C	7040,7041,7043,7048	0402B104K160CT	C	7402,7405,7408	0402N331J500CT
C	7042,7050,7061,7063	0402N331J500CT	C	7403,7406,7409,7411	0402B104K160CT
C	7047	0603B474K250CT	C	7404,7407	0402N101J500CT
C	7055,7057,7200,7203	0402B104K160CT	C	7412,7414,7416,7602	0402N102J500CT
C	7058-7060,7062,7064	0402N102J500CT	C	7413,7415,7603,7904	0402B104K160CT
C	7065,7067,7071,7073	0402N102J500CT	C	7604,7907,7925	0402N102J500CT
C	7066,7068-7070,7072	0402N331J500CT	C	7900	0402N3R0C500CT
C	7074,7075,7077,7079	0402N331J500CT	C	7901	0402B103K160CT
C	7076,7078,7201,7204	0402N102J500CT	C	7906,7908	0402B104K160CT
C	7081	0603B105K160CT	MLCD ASSY Consists of MLCB ASSY ENCB ASSY GI MLCD ASSY SEMICONDUCTORS		
C	7205,7207,7209	0402N102J500CT			
C	7206,7208,7210,7211	0402B104K160CT			
C	7212-7214,7216,7220	0402N102J500CT			
C	7215,7334,7358,7362	0805X226M100CT			
C	7217,7218 (220 uF/16 V)	CCH2090			
C	7219,7221,7225,7231	0402B104K160CT			
C	7222,7224,7229,7230	0402N102J500CT			
C	7227,7228	CKSSYB104K16			
C	7232,7237,7244	0402B104K160CT			
C	7233,7243 (0.01 uF)	ACE7113	IC	6002,6003	U74AHC595G-P16
C	7234,7247	0402B472K500CT	IC	6002,6003	74VHC595FT
C	7235,7238,7239,7246	0402N102J500CT	Q	6208-6219	LTC023JEB
C	7241 (0.47 uF)	ACE7114	Q	6500-6502	LSCR523UB
C	7248,7251,7255-7258	0402N102J500CT	D	6227,6228	ASMY-CWGO-NX7A2
C	7249,7354,7399,7401	0402N101J500CT	D	6229-6236	FC-F1608BAK5
C	7252-7254,7259,7260	0402B104K160CT	D	6500,6501	ASMB-6W020C108@V
C	7261-7263,7286,7289	0402N102J500CT	MISCELLANEOUS		
C	7264,7266,7268,7269	0402B104K160CT			
C	7267,7272,7280,7283	0603X475K6R3CT			
C	7271,7273,7274,7278	0402B104K160CT			
C	7277,7285,7287,7288	0402B103K160CT			
C	7279,7281,7282,7292	0402B104K160CT			
C	7290,7299,7317,7319	0603X475K6R3CT			
C	7291,7312,7346,7352	0402B103K160CT			
C	7293,7298,7300,7309	0402N102J500CT			
C	7294-7297,7305-7307	0402B104K160CT			
C	7301,7311,7314,7316	0402X224K250CT	L	6006 CHOKE COIL	CWS5025C-142
C	7310,7343	0402N471J500CT	KN	6002,6003 WRAPPING TERMINAL	CKF1089
C	7313,7315,7320,7332	0402B104K160CT	KN	6005-6007 WRAPPING TERMINAL	CKF1089
C	7318,7322,7330,7336	0402X224K250CT	KN	6500 WRAPPING TERMINAL	CKF1089
C	7321	0603X106K100CT	S	6207-6212,6500,6501 PUSH SWITCH	CSG1155
C	7323,7327,7329,7333	0603X475K6R3CT	S	6502 ROTARY ENCODER	DSX1152
C	7326,7371,7395	0603X105K250CT	S	6503,6504 PUSH SWITCH	CSG1155
C	7331,7357	VG7107M016ANE01K	CN	6001 FFC/FPC CONNECTOR	CKS6644
C	7331,7357	VG7107M016ANE01K	CN	6002 CONNECTOR	CKS6207
C	7331,7357	VG7107M016ANE01K	CN	6003 FFC/FPC CONNECTOR	CKS6648
C	7301,7311,7314,7316	0402X224K250CT	CN	6205,6500 FFC/FPC CONNECTOR	CKS6638
C	7310,7343	0402N471J500CT	RESISTORS		
C	7313,7315,7320,7332	0402B104K160CT			
C	7318,7322,7330,7336	0402X224K250CT			
C	7321	0603X106K100CT			
C	7323,7327,7329,7333	0603X475K6R3CT			
C	7326,7371,7395	0603X105K250CT			
C	7331,7357	VG7107M016ANE01K			
C	7331,7357	VG7107M016ANE01K			
C	7331,7357	VG7107M016ANE01K			
C	7331,7357	VG7107M016ANE01K			
C	7331,7357	VG7107M016ANE01K			

Mark No. Description**Part No.****Mark No. Description****Part No.**

R 6021,6022,6260
R 6025-6034,6518-6521
R 6035-6056
R 6206,6267,6268,6271
R 6207-6210,6266,6272

RC0603JR-0710KL@V
RC0402JR-070RL@V
RC0603JR-070RL@V
RC0402JR-074K7L@V
RC0402JR-07100RL@V

R 8803,8804
R 8806,8810
R 8808

RC0402JR-0715KL@V
RC0402JR-0739KL@V
RC0402JR-07100KL@V

R 6245,6246,6255-6257
R 6247,6248,6251-6254
R 6249,6250
R 6258
R 6259

RC0603JR-073K3L@V
RC0603JR-071KL@V
RC0603JR-07910RL@V
RC0603JR-073K9L@V
RC0603JR-075K6L@V

R 8811
R 8900,8901
R 8902

RC0402JR-0710KL@V
RC0402JR-07100RL@V
RC0402JR-0782RL@V

CAPACITORS

C 8700,8701
C 8800,8802
C 8801,8902
C 8803
C 8805

0402N331J500CT
0402N101J500CT
0402B104K160CT
0402B153K160CT
0603X106K100CT

C 8806,8807
C 8809
C 8900,8901

1206X106K500CT
0402N102J500CT
0402X105K250CT

W SW POWER SUPPLY

There is no service parts.

CAPACITORS

C 6005
C 6006,6012
C 6008,6013,6022-6024
C 6014
C 6015,6027,6028,6041

0805X226M160CT
0805X106K160CT
CC0402KRX7R7BB104
0603X105K160CT
CC0402KRX7R9BB102

C 6036,6038,6055,6204
C 6059,6060,6201,6203
C 6205,6206,6231,6500
C 6212,6214,6227,6228
C 6213,6215

CC0402KRX7R7BB104
CC0402KRX7R9BB102
CC0402KRX7R9BB102
CC0402KRX7R7BB104
0402N101J500CT

C 6216
C 6501
C 6502
C 6503-6505

0402N331J500CT
CC0402KRX7R7BB104
CC0402KRX7R9BB102
CC0402KRX7R7BB103

COIL ASSY**Consists of****COIL1 ASSY****COIL2 ASSY****JOGB ASSY**

N Q R

COIL ASSY**SEMICONDUCTORS**

IC 8800
IC 8800
IC 8801
IC 8802
Q 8800-8802

U74LVC1G08G-AL5
TC7SZ08FUS2
PST8430N
NJM2386ADL3-33
YJJ3400A

D 8800
D 8801

RBR2MM40A
RB751SM-40

MISCELLANEOUS

L 8800,8801 SMD FERRITE BEADS
CN 8700 CONNECTOR
CN 8800 04P CONNECTOR
CN 8900 CONNECTOR
PC 8900 PHOTO INTERRUPTER

DTF1130
HWW-SL02-150-J1
RKN1045
HWW-SL04-150-J1
KE-2N10-36

RESISTORS

R 8801
R 8802,8805,8807,8809

RC0402JR-078K2L@V
RC1206JR-07150RL@V