


9. EXPLODED VIEWS AND PARTS LIST

- NOTES:
- Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 - The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 - Screws adjacent to ▼ mark on product are used for disassembly.
 - For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING SECTION

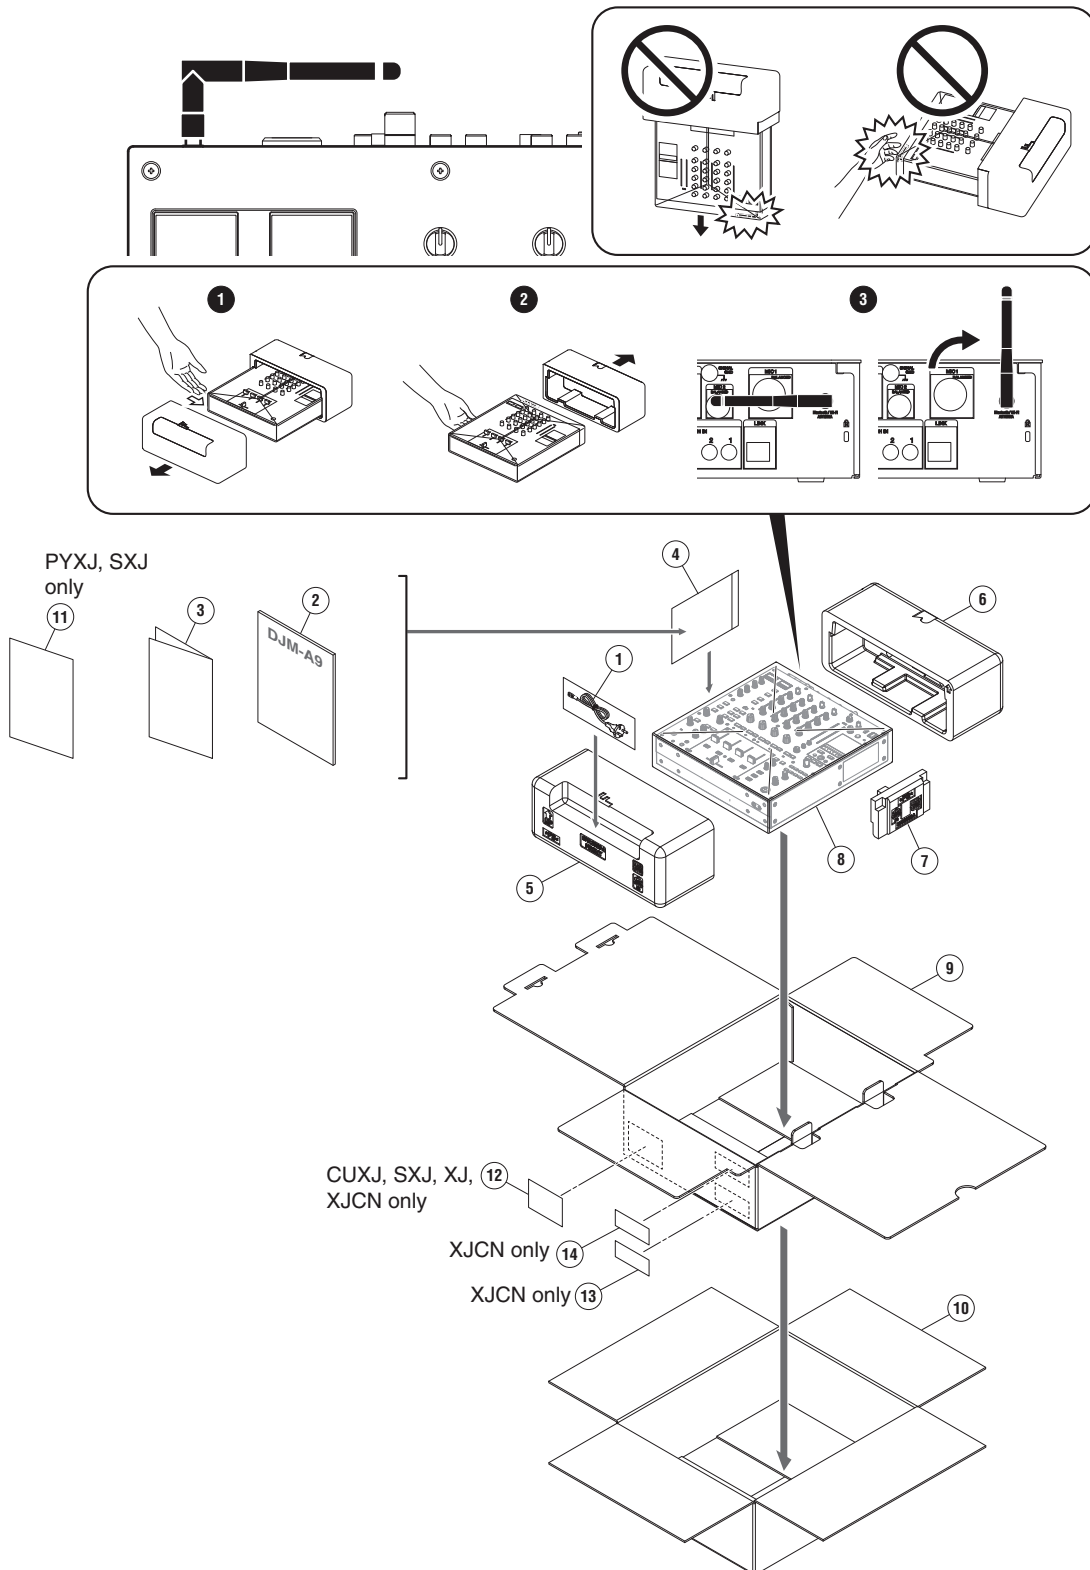

(1) PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
⚠	1 Power cord	See Contrast table (2)
	2 Quick Start Guide	See Contrast table (2)
	3 Precautions for Use	See Contrast table (2)
NSP	4 Polyethylene Bag	AHG7117
	5 Packing Pad	DHA2020
	6 Packing Pad	DHA2021
	7 Packing Pad	DHA2035
	8 Mirror Mat (1200*1000)	DHL1169
	9 Packing Case	DHG3843
	10 Master Carton	See Contrast table (2)
NSP	11 Warranty	See Contrast table (2)
NSP	12 Label	See Contrast table (2)
NSP	13 Label	See Contrast table (2)
NSP	14 Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-A9/CUXJ, PYXJ, SXJ, XJ and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-A9/CUXJ	DJM-A9/PYXJ	DJM-A9/SXJ	DJM-A9/XJ	DJM-A9/XJCN
⚠	1	Power cord	DDG1123	DDG1124	DDG1124	DDG1124	DDG1125
	2	Quick Start Guide	DRH1701	DRH1701	DRH1701	DRH1701	DRH1702
	3	Precautions for Use	DRH1699	DRH1699	DRH1699	DRH1699	DRH1700
	10	Master Carton	DHG3847	DHG3844	DHG3845	DHG3846	DHG3849
NSP	11	Warranty	Not used	DRY1274	DRY1274	Not used	Not used
NSP	12	Label	DRW3037	Not used	DRW3035	DRW3036	DRW3039
NSP	13	Label	Not used	Not used	Not used	Not used	DRW3040
NSP	14	Label	Not used	Not used	Not used	Not used	DRW2842

△



Refer to
"9.3 CHASSIS SECTION (1/2)".

(1) EXTERIOR SECTION PARTS LIST


Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	HPJC Assy	DWX4761	26	Knob	DAA1470	
2	RCA Plug	DKM1026	27	Knob	DAA1471	A
3	Wi-Fi Antenna	DSD1004	28	Knob	DAA1434	
4	Panel	DAH3382	29	Rotary Knob Low (BN)	DAA1265	
5	Panel	DAH3383	30	Knob	DAA1420	
6	Control Panel	DNB1288	31	Knob/RSW	DAA1307	
7	DS Tape	DEH1126	32	Knob	DAA1415	
8	Lens	DNK7054	33	Knob	DAA1417	
9	Lens	DNK7053	34	Knob	DAA1430	
10	Lens	DNK6516	35	Knob	DAA1435	
11	Holder	DNK6552	36	Select Knob	DAA1205	B
12	Cushion	DEC4042	37	Rotary SW Knob (C)	DAA1180	
13	Cushion	DEC4043	38	Knob	DAA1445	
14	Panel	DAH3386	39	Stopper	DNK6970	
15	Packing	DEC4028	40	Knob	DAC3539	
16	Panel	DNK7049	41	Slider Knob 2	DAC2685	
17	Lid	DNK7050	42	Slider Knob Stopper	DNK5888	
18	Panel	DNK7047	43	Knob	DAC3238	
19	Lid	DNK7048	44	Stopper	DNK6440	
20	Stay	DNG1153	45	Holder	DNK6549	C
⚠ 21	Panel	DNK7051	NSP 46	Name Label	See Contrast table (2)	
22	Cushion	DEC3969	47	Nut M12	DBN1018	
23	SW Packing (EF)	DEC2929	48	Screw	BBZ30P060FTB	
24	Button	DAC3632	49	Screw	BBZ30P060FTC	
25	Window	DAH3385	50	Screw	BPZ20P060FTC	
			51	Screw	BPZ30P080FNI	
			52	Screw (FE)	DBA1290	
			53	Screw	DBA1451	

(2) CONTRAST TABLE

DJM-A9/CUXJ, PYXJ, SXJ, XJ and XJCN are constructed the same except for the following:


Mark	No.	Symbol and Description	DJM-A9/CUXJ	DJM-A9/PYXJ	DJM-A9/SXJ	DJM-A9/XJ	DJM-A9/XJCN
NSP	46	Name Label	DAL1386	DAL1383	DAL1384	DAL1385	DAL1388

9.3 CHASSIS SECTION (1/2)

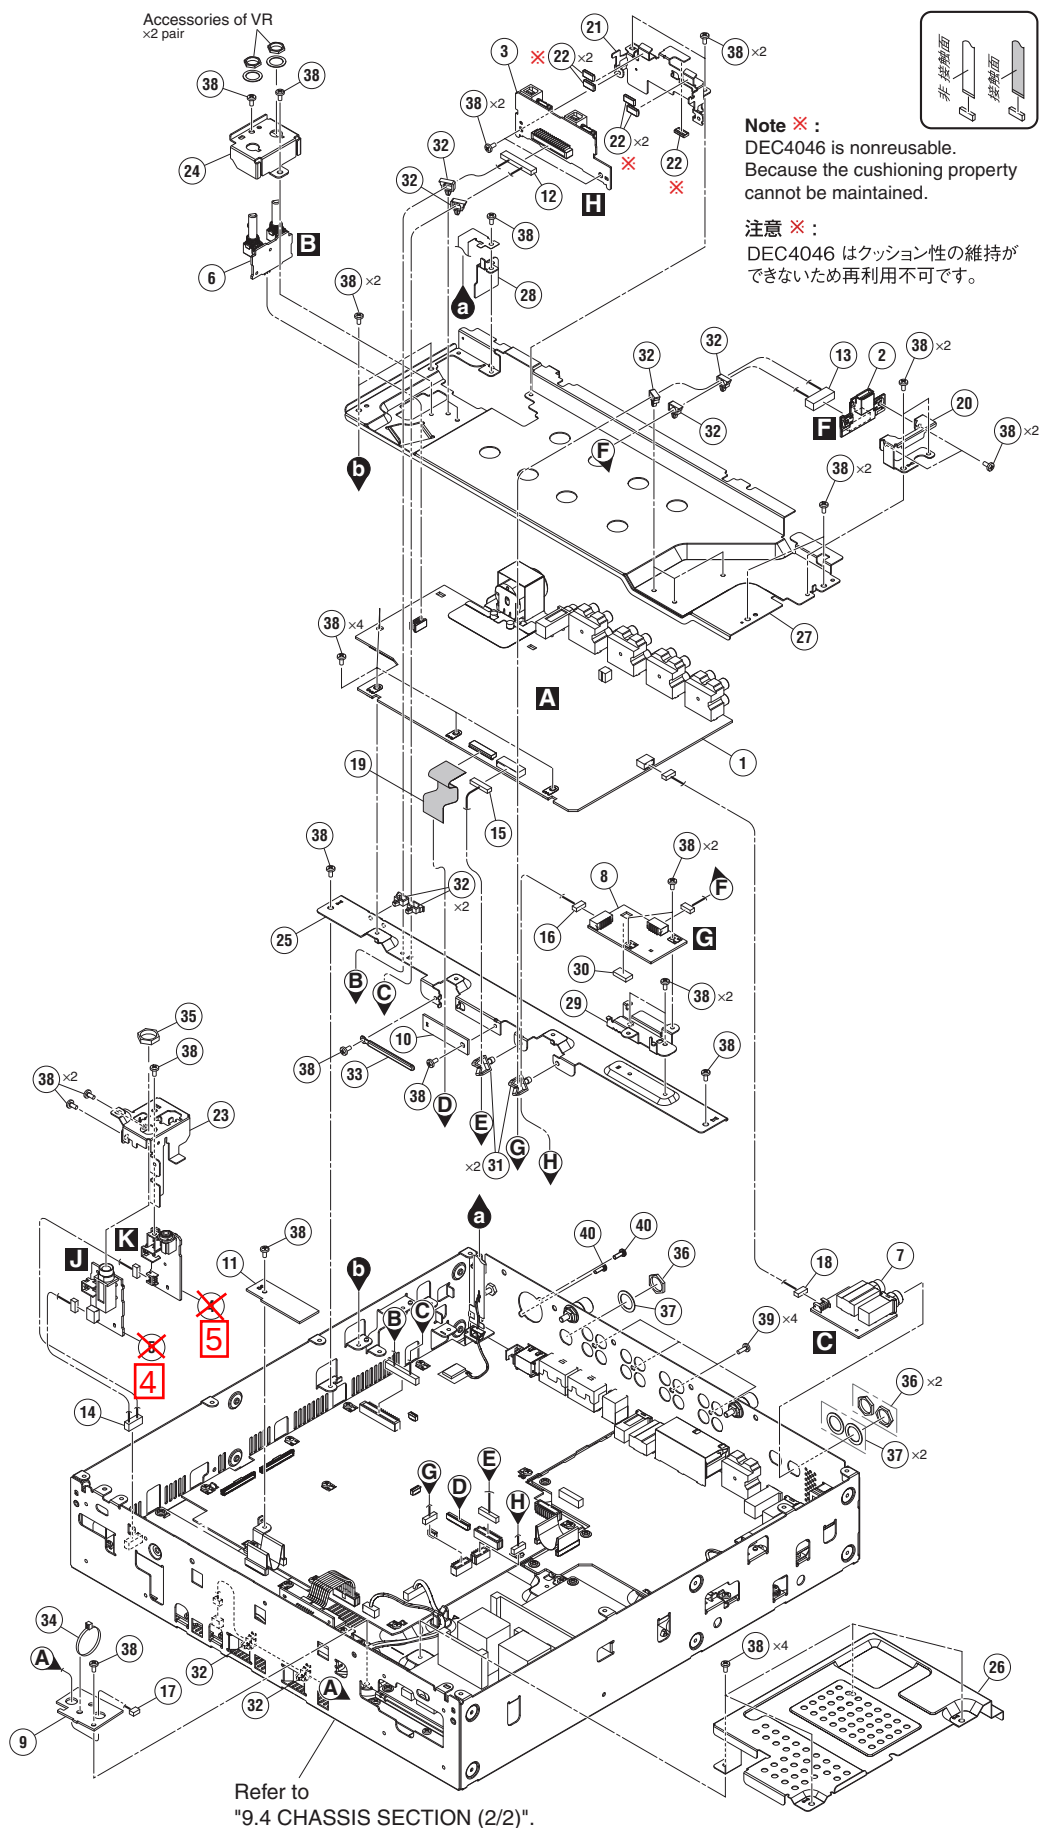

CHASSIS SECTION (1/2) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	AINB Service Assy	DEA1147
2	USBA Assy	DWX4756
3	USBBC Assy	DWX4757
4	HPJK Assy	DWX4759
5	HPJM Assy	DWX4760
6	MTRM Assy	DWX4762
7	RTNJ Assy	DWX4766
8	USBP Assy	DWX4767
9	CCB1 Assy	DWX4803
10	FGP1 Assy	DWX4801
11	FGP2 Assy	DWX4802
12	Shielded Conn-Cable	DDA1107
13	Shielded Conn-Cable	DDA1105
14	Crimp Connector	DDC1043
15	Parallel Jumper	PF10PP-S07A
16	Connector Assy	PF06PP-S12
17	Parallel Jumper	PF03PP-D25A
18	Parallel Jumper	PF04PP-D07A
19	FFC	DDD2147
20	Stay	DNG1148
21	Stay	DNG1154
22	Gasket	DEC4046
23	Stay	DNG1151
24	Stay	DNG1157
25	Stay	DNG1150
26	Cover	DNF2066
27	Shield Plate	DNG1149
28	Shield Plate	DNG1156
29	Stay	DNF1951
30	Sheet	DEC3621
31	Holder	VEC1355
32	Locking Mini Clamp	DEC2439
33	Cord Clamper	DEX1025
34	Cable Tie (SKB-90BK)	ZCA-SKB90BK
35	Nut M12	DBN1018
36	Nut M12	NKX2FNI
37	Washer	DEC2920
38	Screw	BBZ30P060FTC
39	Screw	BPZ30P080FTB
40	Screw	PPZ30P080FTB



注意 ※：
AEB7092は両面テープで固定のため
再利用不可です。

CHASSIS SECTION (2/2) PARTS LIST


Mark No.	Description	Part No.	
	1 MAIN Assy	DWX4755	
	2 REGB Assy	DWX4763	A
	3 AOUT Assy	DWX4764	
	4 HPPW Assy	DWX4765	
	5 PSWB Assy	DWX4780	
⚠	6 SW POWER SUPPLY	DWR1581	■
⚠	7 AC Inlet	DKP3998	
	8 Shielded Conn-Cable	DDA1110	
	9 Parallel Jumper	PF08PP-S22A	
	10 Parallel Jumper	PF04PP-S17A	
	11 Parallel Jumper	PF05PP-S27A	B
	12 Parallel Jumper	PF09PP-D05A	
	13 Crimp Connector	PF09PP-S07	
	14 Connector Assy	PF03PP-B05	
	15 FFC	DDD2146	■
	16 FFC	DDD2147	
	17 Rear Panel	DNC2142	
	18 Earth Terminal	DKE1019	
	19 Chassis	DNA1485	
NSP	20 Spacer	AEB7092	C
	21 Foot (Rubber)	REC-434	
NSP	22 PCB Stay (FE)	VNE2489	
	23 Stay	DNG1129	
	24 Power Knob Guard	DNK4534	■
	25 Shield Case	DNG1152	
	26 Power Knob	DAC2306	
	27 Sheet	DEC3618	
	28 Cover	DNG1138	
	29 Sheet	DEC3901	D
	30 Stay	DND1313	
	31 Holder	VEC1355	
	32 Locking Mini Clamp	DEC2439	
	33 Cord Clamper	DEX1025	■
⚠	34 Spacer	DEC3878	
⚠	35 Spacer	DEC3850	
NSP	36 PCB Holder	PNW1706	
	37 Sheet	DEC4079	
	38 Cable Tie (SKB-90BK)	ZCA-SKB90BK	E
	39 Flange Nut M9	DBN1008	
	40 Nut M12	NKX2FNI	
	41 Washer	DEC2920	
	42 Screw	ABZ30P060FTC	■
	43 Screw	BBZ30P060FTB	
	44 Screw	BBZ30P060FTC	
	45 Screw	BBZ30P080FTC	
	46 Screw	BPZ30P080FTB	F
	47 Screw	IBZ30P080FTB	
	48 Screw	PMH40P080FTC	
	49 Screw	PPZ30P080FTB	

9.5 CONTROL PANEL SECTION (1/3)

A




● Channel Fader Section

Refer to "7. DISASSEMBLY"

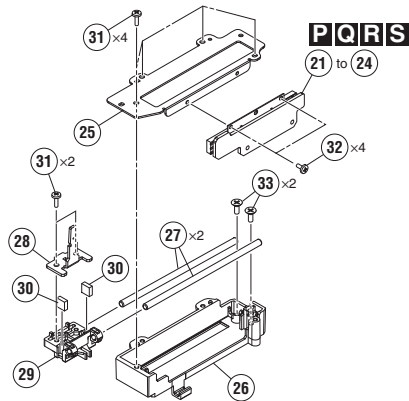

● CFX Section

Refer to "7. DISASSEMBLY"

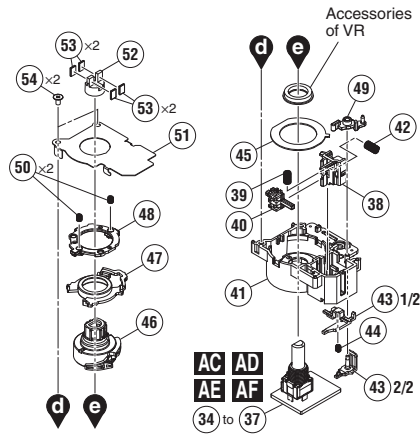

B


C

D

E

F

See
"● Channel Fader Section".




CONTROL PANEL SECTION (1/3) PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
NSP	1 LEDB Assy	DWX4769	47	Cam	DNK6969	A
	2 CRF Assy	DWX4790	48	Plate	DNK6929	
	3 1..Crossfader Service Assy	DEA1096	49	Arm	DNK6905	
	4 2..CRFB Assy	DWX4772	50	Coil Spring	DBH1851	
	5 Crimp Connector	DDC1041				
			51	Cover	DNH3454	
	6 Crimp Connector	DDC1042	52	Cap	DNK6904	
	7 FFC	DDD2089	53	Contact Rubber	DEC3972	
	8 FFC	DDD2096	54	Screw	DBA1455	
	9 Locking Mini Clamp	DEC2439				
10	Lever	DNK6906				
11	Grip	DED1192				B
12	Leaf Spring	DBK1402				
13	Adjuster	DNK6974				
14	Holder	DNK6878				
15	Sheet	DEC3885				
16	Stopper	DNK7069				
17	Cap	DAC3520				
18	Screw	BBZ30P060FTC				
19	Screw	BSZ20P040FTB				
20	Screw	DBA1456				C
Channel Fader Section						
21	CHF1 Assy	DWX4783				
22	CHF2 Assy	DWX4784				
23	CHF3 Assy	DWX4785				
24	CHF4 Assy	DWX4786				
25	Cover	DNG1131				
26	Holder	DNK6884				
27	Guide Shaft VK1	DLA1978				
28	Lever Plate	DNH2954				D
29	Slider	DNK6889				
30	Cushion	DEC3640				
31	Screw	BPZ20P060FTC				
32	Screw	BSZ20P040FTB				
33	Screw	CPZ26P080FTC				
CFX Section						
34	CFX1 Assy	DWX4773				
35	CFX2 Assy	DWX4774				E
36	CFX3 Assy	DWX4775				
37	CFX4 Assy	DWX4776				
38	Holder	DNK6903				
39	Spring	DBH1826				
40	Stopper	DNK6902				
41	Base	DNK6900				
42	Spring	DBH1827				
43	Brake	DNK7061				
44	Spring	DBH1843				F
45	Sheet	DEC3971				
46	Cam	DNK6901				

9.6 CONTROL PANEL SECTION (2/3)

A • Bottom view

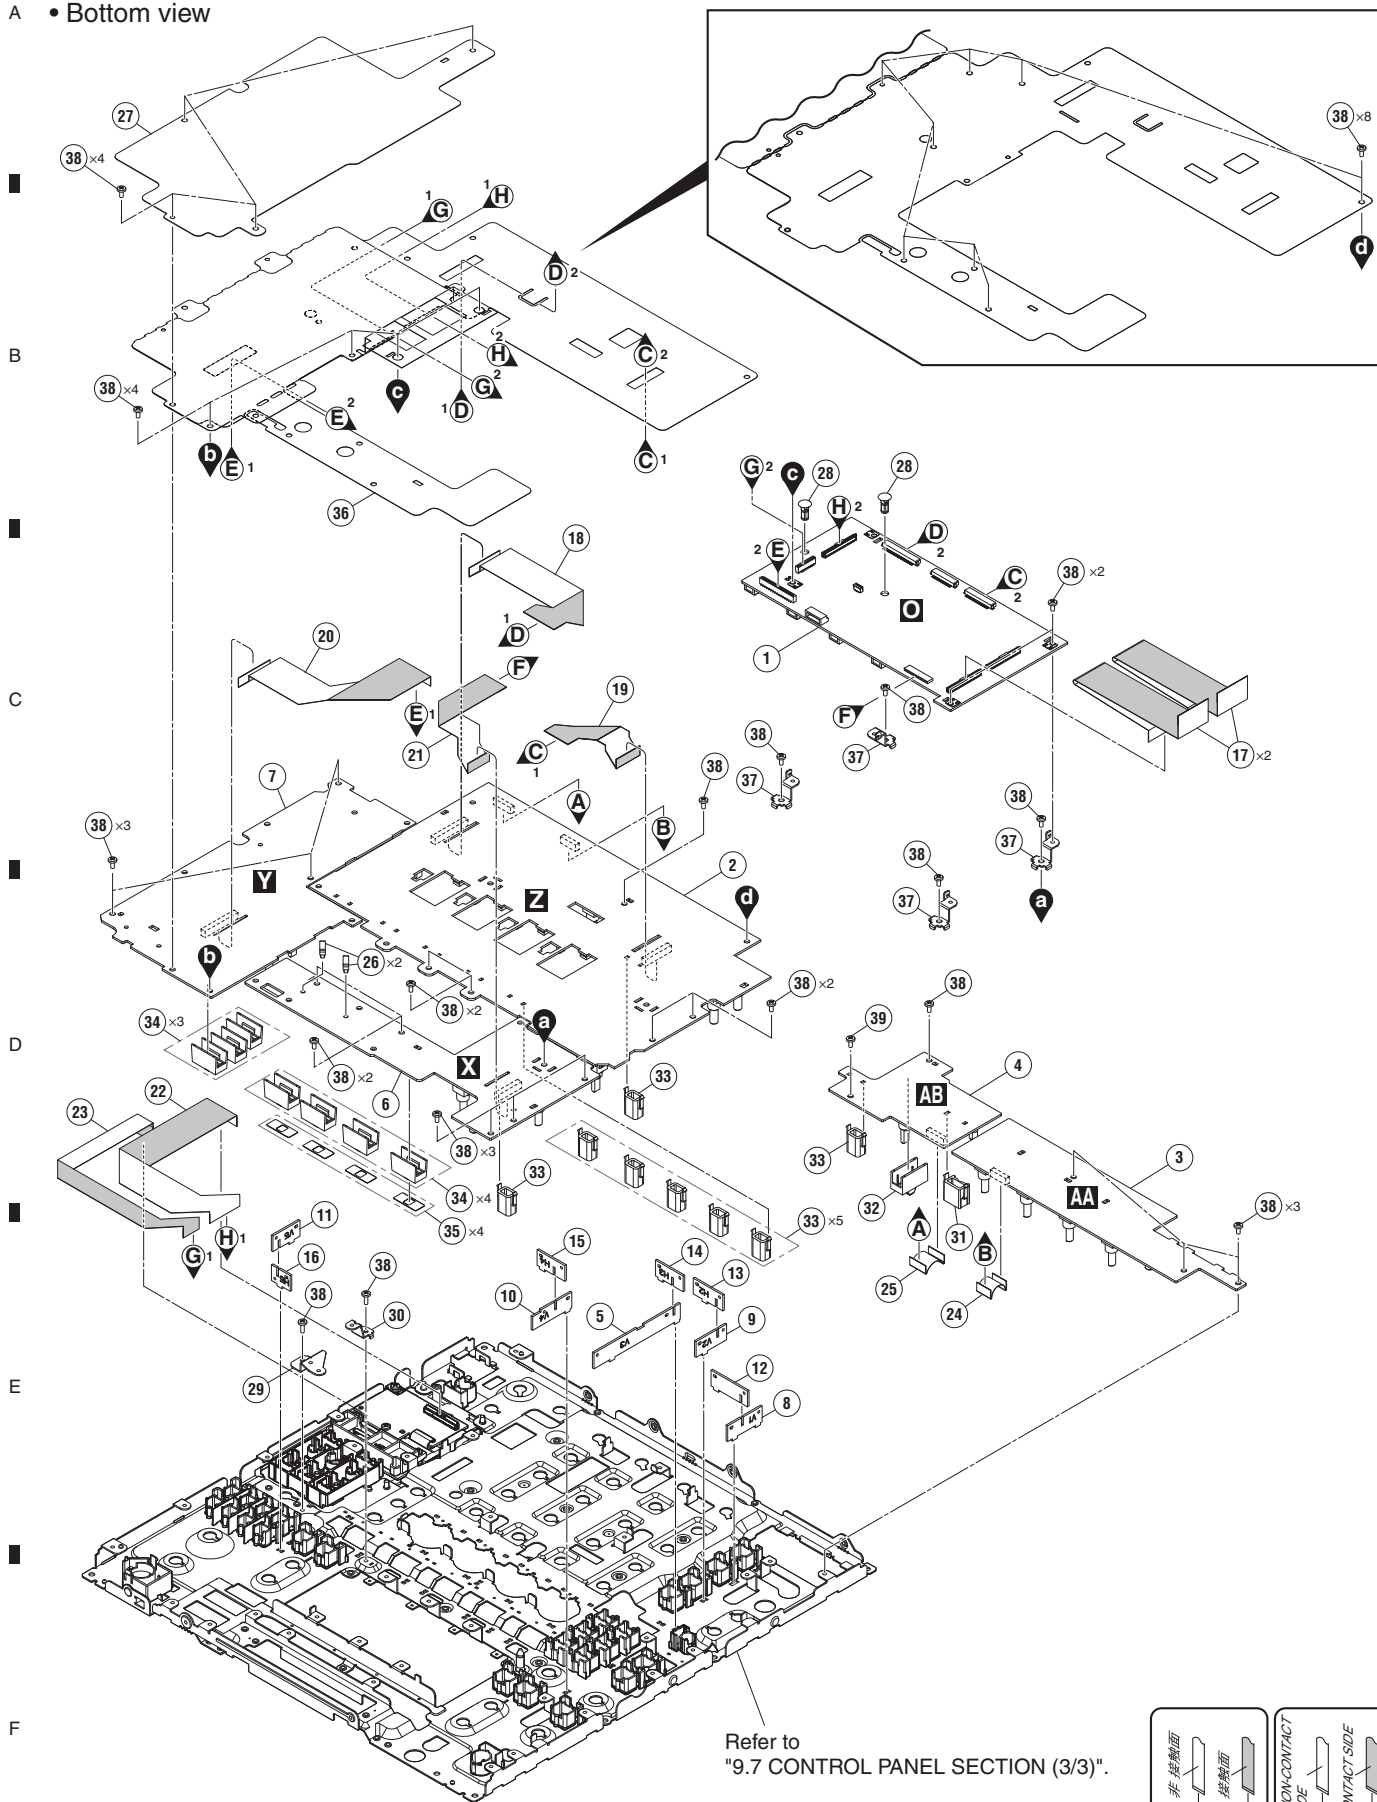

CONTROL PANEL SECTION (2/3) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	UCOM Assy	DWX4768
2	PNLC Assy	DWX4777
3	PNLU Assy	DWX4778
4	MIOB Assy	DWX4779
5	SHADE V3 Assy	DWX4793
6	PNLL Assy	DWX4781
7	PNLR Assy	DWX4782
8	SHADE V1 Assy	DWX4791
9	SHADE V2 Assy	DWX4792
10	SHADE V4 Assy	DWX4794
11	SHADE V5 Assy	DWX4795
12	SHADE H1 Assy	DWX4796
13	SHADE H2 Assy	DWX4797
14	SHADE H3 Assy	DWX4798
15	SHADE H4 Assy	DWX4799
16	SHADE H5 Assy	DWX4800
17	FFC	DDD2152
18	FFC	DDD2087
19	FFC	DDD2088
20	FFC	DDD2090
21	FFC	DDD2091
22	FFC	DDD2092
23	FFC	DDD2093
24	FFC	DDD2094
25	FFC	DDD2095
26	Locking Mini Clamp	DEC2439
27	Sheet	DEC4058
28	Spacer	DEC3880
29	Stay	DND1321
30	Stay	DND1322
31	Holder	DNK6511
32	Cap	DAC3136
33	Holder	DNK7066
34	Slide SW Cap (W)	DAC2401
35	Sheet	DEC3902
36	Sheet	DEC4050
37	Stay	DND1313
38	Screw	BBZ30P060FTC
39	Screw	BPZ30P080FTB





9.7 CONTROL PANEL SECTION (3/3)

A • Bottom view

● LCD Section











• Top view

• Bottom view

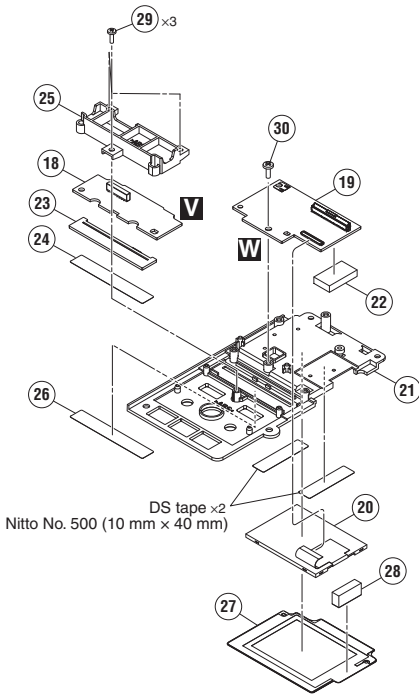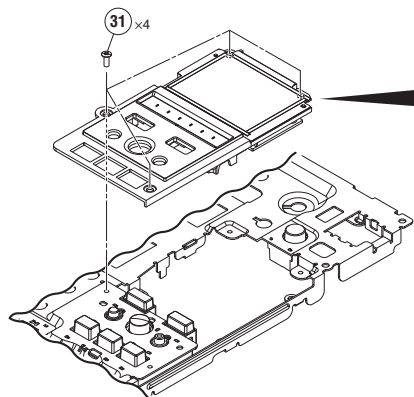

DS tape x2
Nitto No. 500 (10 mm x 40 mm)

● Divide position

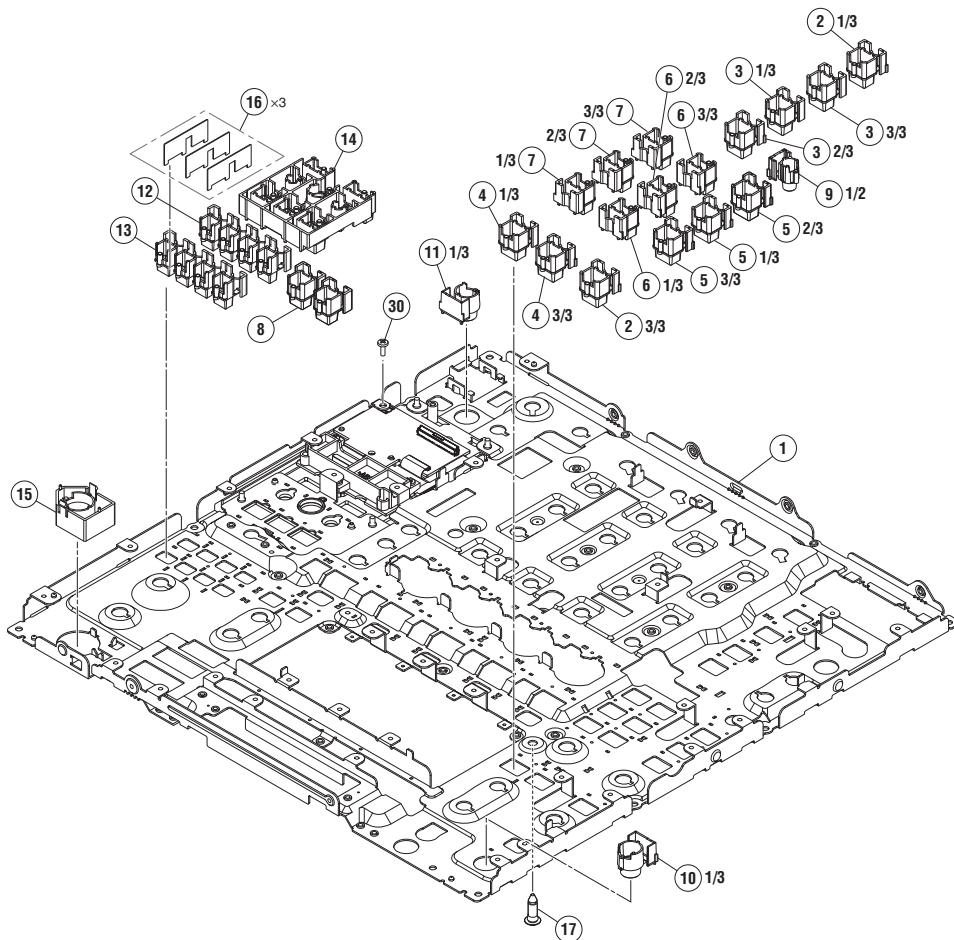

CONTROL PANEL SECTION (3/3) PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Stay	DND1320
2	Button	DAC3637
3	Button	DAC3635
4	Button	DAC3636
5	Button	DAC3639
6	Button	DAC3640
7	Button	DAC3641
8	Button	DAC3631
9	Button	DAC3491
10	Button	DAC3628
11	Button	DAC3630
12	Button	DAC3633
13	Button	DAC3634
14	Button	DAC3142
15	Button	DAC3141
16	Sheet	DEC4041
17	PCB Holder	PNW2029

LCD Section

18	CDCB Assy	DWX4771
19	LCDB Assy	DWX4770
20	TFT LCD	DWX4330
21	Panel	DNK7067
22	Cushion	DEC4030
23	Lens	DNK7052
24	DS Tape	DEH1125
25	Holder	DNK7068
26	Panel	DNK7136
27	Sheet	DEC4032
28	Cushion	DEC4031
29	Screw	BPZ26P080FTC
30	Screw	BPZ30P080FTB
31	Screw (FE)	DBA1290

A

B

C

D

E

F

12. PCB PARTS LIST

NOTES: ● Parts marked by “NSP” are generally unavailable because they are not in our Master Spare Parts List.

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.

- When ordering resistors, first convert resistance values into code form as shown in the following examples.

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω − 56 × 10¹ − 561 RD1/4PU   
47 kΩ − 47 × 10³ − 473 RD1/4PU    J
0.5 Ω − R50 RN2H    K
1 Ω − 1R0 RSIP    K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ − 562 × 10¹ − 5621 RN1/4PC     F

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
<u>LIST OF ASSEMBLIES</u>				<u>AINB ASSY</u>			
				<u>Consists of</u>			
				<u>AINB SERVICE ASSY</u>			
				<u>HPJK ASSY</u>			
				<u>HPJM ASSY</u>			
				<u>HPJC ASSY</u>			
				<u>MTRM ASSY</u>			
				<u>REGB ASSY</u>			
				<u>ABEJKL</u>			
				<u>AINB ASSY</u>			
				<u>SEMICONDUCTORS</u>			
NSP	1..MOTHER ASSY	DWM2844		IC 4001		TC7SZ08FUS2	
	2..MAIN ASSY	DWX4755		IC 4002-4004		TC7SH08FUS2	
	2..USBA ASSY	DWX4756		 IC 4005		LP5907MFX-4.5@V	
	2..USBBC ASSY	DWX4757		 IC 4006		S-1170B33UC-OTS	
	1..CDCB ASSY	DWX4771		IC 4101-4103,4201-4203		LME49723MA	
	1..AINB ASSY	DWM2845		IC 4104,4105,4204,4205		NE5532AD	
	2..AINB SERVICE ASSY	DEA1147		IC 4301-4303,4401-4403		LME49723MA	
	2..HPJK ASSY	DWX4759		IC 4304,4305,4404,4405		NE5532AD	
C	2..HPJM ASSY	DWX4760		NSP IC 4501,4502		ES9842QPRO@V	
	2..HPJC ASSY	DWX4761		IC 4601		NJM2068MD	
	2..MTRM ASSY	DWX4762		IC 4602,4703		PCM1803ADB	
	2..REGB ASSY	DWX4763		IC 4701,4702		NJM4580MD	
NSP	1..AOUTB ASSY	DWM2846		 IC 5051		LM7915CT@V	
	2..AOUT ASSY	DWX4764		 IC 5052		NJM7805FA	
	2..HPPW ASSY	DWX4765		 IC 5053		NJM7815FA	
	2..RTNJ ASSY	DWX4766		Q 4101,4102,4201,4202		HN1C01FUS1	
NSP	1..SUB ASSY	DWM2847		Q 4103,4104,4203,4204		2SK3320	
	2..UCOM ASSY	DWX4768		Q 4105,4205,4305,4405		LSCR523UB	
	2..LEDB ASSY	DWX4769		Q 4301,4302,4401,4402		HN1C01FUS1	
	2..LCDB ASSY	DWX4770		Q 4303,4304,4403,4404		2SK3320	
D	2..USBP ASSY	DWX4767		Q 4701-4704		2SK209	
	2..CRFB ASSY	DWX4772		D 4101-4104,4201-4204		DF2B18FU	
	2..CFX1 ASSY	DWX4773		D 4105,4205,4305,4405		1SS355L@V	
	2..CFX2 ASSY	DWX4774		D 4106-4109,4206-4209		RB548W	
NSP	2..CFX3 ASSY	DWX4775		D 4301-4304,4401-4404		DF2B18FU	
	2..CFX4 ASSY	DWX4776		D 4306-4309,4406-4409		RB548W	
				D 4601,4602		RB548W	
				D 4701-4704,5053-5056		RB501VM-40	
	1..PNLC ASSY	DWX4777		D 4851-4853,4901-4903		DF2B18FU	
	1..PNL2 ASSY	DWM2848		D 4951-4953		DF2B18FU	
	2..PNLU ASSY	DWX4778					
	2..MIOB ASSY	DWX4779					
E	2..PSWB ASSY	DWX4780					
	1..PNL3 ASSY	DWM2849					
	2..PNLL ASSY	DWX4781					
	2..PNLR ASSY	DWX4782					
	2..CHF1 ASSY	DWX4783					
	2..CHF2 ASSY	DWX4784					
	2..CHF3 ASSY	DWX4785					
	2..CHF4 ASSY	DWX4786					
	1..SW POWER SUPPLY	DWR1581					
				<u>MISCELLANEOUS</u>			
				L 4701,4702 CHIP SOLID INDUCTOR		XTL3010	
				JA 4101,4201,4301,4401 4P PIN JACK		DKB1090	
				JA 4701 XLR SOCKET		DKB1124	

5		6		7		8	
Mark	No. Description	Part No.	Mark	No. Description	Part No.		
	JA 4702,4851,4951 6.5 DIA JACK	DKN1669	R	4352-4355,4452-4455	RC0603JR-07220RL@V		
	JA 4901,4952 STEREO MINI JACK	XKN3017	R	4358,4359,4458,4459	RC0603DR-07330KL@V		
	KN 4001-4003,4951 EARTH TERMINAL	AKF7002	R	4416,4418,4507,4508	RC0402JR-0747RL@V	A	
	KN 4851,4901,4902 SCREW PLATE	VNE1948	R	4420,4421,4424,4425	RT0603DRD072K2L@V		
	RY 4101,4201,4301,4401 RELAY	DSR1023	R	4457	RT0603DRD071KL@V		
	CN 4001 FFC CONNECTOR	VKN1811	R	4501,4513,4611,4747	RC0402JR-07100RL@V		
	CN 4002 CONNECTOR	WWW-R1020-J1@V	R	4504,4505,4511,4516	RC0402JR-0710KL@V		
	CN 4003,4851 CONNECTOR	WWW-R0420-J1@V	R	4506,4518,4703	RC0603JR-070RL@V		
	CN 4701 B TO B CONNECTOR	DKP3997	R	4509,4510,4514,4515	RC0402JR-070RL@V		
	CN 4901,4951 CONNECTOR	WWW-R0320-J1@V	R	4517,4523	RC0402JR-0710KL@V		
	CN 5001 PLUG	CKS3533	R	4519,4520	RC0402JR-0747RL@V		
	CN 5051 CONNECTOR	WWW-L0920-J1@V	R	4521,4522,4608-4610	RC0402JR-070RL@V		
	VA 4101,4102,4201,4202 VARISTORS	EZJZ1V270RM	R	4601,4602	RC0603DR-0747KL@V	B	
	VA 4301,4302,4401,4402 VARISTORS	EZJZ1V270RM	R	4603,4604,4717-4720	RC0603DR-073K3L@V		
	VA 4701,4704-4708 VARISTORS	EZJZ1V270RM	R	4605,4606,4737,4738	RC0603DR-071K8L@V		
			R	4607,4743	RC0402JR-07330RL@V		
			R	4701,4702 (6.8 kohm)	DCN1212		
RESISTORS							
	R 4001,4002	RT0603DRD0768RL@V					
	R 4003,4004	RT0603DRD0722RL@V	R	4707-4714	RC0603JR-07100RL@V		
	R 4006,4007,4502,4503	RC0402JR-070RL@V	R	4715,4716	RC0603DR-076K8L@V		
	R 4008-4015,4116,4118	RC0402JR-0747RL@V	R	4721,4723,4727,4728	RT0603DRD071K5L@V		
	R 4016,4156,4157,4256	RT0603DRD071KL@V	R	4722,4724,4730,4732	RT0603DRD074K7L@V		
			R	4725,4726	RC0603DR-07820RL@V		
	R 4101,4102,4201,4202	RT0603DRD07100RL@V					
	R 4103,4104,4203,4204	RC0603JR-07100RL@V	R	4729,4731	RC0402JR-07150RL@V		
	R 4105,4205,4305,4405	RC0402JR-0718KL@V	R	4733,4734	RC0603DR-073K3L@V	C	
	R 4106,4206,4306,4406	RC0603JR-072KL@V	R	4739,4740	RC0603DR-0716KL@V		
	R 4107,4108,4207,4208	RC0603JR-071K2L@V	R	4741,4742	RC0603DR-07220RL@V		
			R	4744-4746	RC0402JR-070RL@V		
	R 4109,4209,4309,4409	RC0402JR-07470RL@V		VR 5001,5002 ROTARY VR	DCS1123		
	R 4110,4113,4210,4213	RT0603DRD07470RL@V	CAPACITORS				
	R 4111,4112,4211,4212	RT0603DRD0747KL@V	C	4003,4520,4541 (0.1 uF)	DCE1062		
	R 4114,4115,4214,4215	RT0603DRD071K2L@V	C	4004	0402B102K500CT		
	R 4117,4119,4217,4219	RT0603DRD07220RL@V	C	4006-4009,4021,4612	0402B104K160CT		
			C	4010	CEAT220M50		
	R 4120,4121,4124,4125	RT0603DRD072K2L@V	C	4014,4135,4136	0603B104K500CT		
	R 4122,4123,4222,4223	RC0603DR-0747KL@V					
	R 4126,4127,4226,4227	RT0603DRD0791KL@V	C	4015,4017 (0.033 uF)	DCE1041	D	
	R 4128,4129,4228,4229	RT0603DRD077K5L@V	C	4016,4019,4133,4134 (220 uF/25 V)	DCH1358		
	R 4134,4234,4334,4434	RC0402JR-071KL@V	C	4018 (0.1 uF)	CCG1321		
			C	4020,4139-4142 (100 uF/25 V)	DCH1357		
	R 4135,4235,4335,4435	RC0402JR-0710KL@V	C	4022,4025,4510,4531 (1 uF)	DCG1109		
	R 4136-4143,4236-4243	RC0603DR-075K6L@V					
	R 4144-4147,4244-4247	RC0603DR-071K6L@V	C	4023,4024,4509,4515	0805X475K250CT		
	R 4148-4151,4248-4251	RC0603DR-07330RL@V	C	4028 (1000 pF)	ACE7099		
	R 4152-4155,4252-4255	RC0603JR-07220RL@V	C	4101,4103,4201,4203	0603N102J500CT		
			C	4102,4104,4131,4132	0603B103K500CT		
	R 4158,4159,4258,4259	RC0603DR-07330KL@V	C	4105,4106,4109,4110	0402N221J500CT		
	R 4216,4218,4316,4318	RC0402JR-0747RL@V					
	R 4220,4221,4224,4225	RT0603DRD072K2L@V	C	4107,4108,4207,4208 (1000 pF)	DCG1094		
	R 4257,4356,4357,4456	RT0603DRD071KL@V	C	4111,4112,4211,4212 (100 pF)	DCG1082	E	
	R 4301,4302,4401,4402	RT0603DRD07100RL@V	C	4113,4114,4213,4214 (220 uF/25 V)	DCH1369		
			C	4115,4116,4215,4216	0603B223K500CT		
	R 4303,4304,4403,4404	RC0603JR-07100RL@V	C	4123,4124,4223,4224 (0.033 uF)	DCE1028		
	R 4307,4308,4407,4408	RC0603JR-071K2L@V					
	R 4310,4313,4410,4413	RT0603DRD07470RL@V	C	4129,4130,4229,4230 (0.01 uF)	ACE7097		
	R 4311,4312,4411,4412	RT0603DRD0747KL@V	C	4137,4138,4233,4234 (220 uF/25 V)	DCH1358		
	R 4314,4315,4414,4415	RT0603DRD071K2L@V	C	4143-4146,4243-4246 (560 pF)	DCG1091		
			C	4147-4150,4235,4236	0603B104K500CT		
	R 4317,4319,4417,4419	RT0603DRD07220RL@V	C	4151,4152,4251,4252 (2200 pF)	DCG1098		
	R 4320,4321,4324,4325	RT0603DRD072K2L@V					
	R 4322,4323,4422,4423	RC0603DR-0747KL@V	C	4153,4253,4353,4453 (0.01 uF)	DCG1101		
	R 4326,4327,4426,4427	RT0603DRD0791KL@V	C	4154,4254,4354,4454 (10 uF/50 V)	DCH1377		
	R 4328,4329,4428,4429	RT0603DRD077K5L@V	C	4155,4156,4255,4256 (0.01 uF)	DCE1057	F	
			C	4202,4204,4231,4232	0603B103K500CT		
	R 4336-4343,4436-4443	RC0603DR-075K6L@V	C	4205,4206,4209,4210	0402N221J500CT		
	R 4344-4347,4444-4447	RC0603DR-071K6L@V					
	R 4348-4351,4448-4451	RC0603DR-07330RL@V					

Mark	No.	Description	Part No.
A	C	4237,4238,4333,4334 (220 uF/25 V)	DCH1358
	C	4239-4242,4339-4342 (100 uF/25 V)	DCH1357
	C	4247-4250,4335,4336	0603B104K500CT
	C	4301,4303,4401,4403	0603N102J500CT
	C	4302,4304,4331,4332	0603B103K500CT
■	C	4305,4306,4309,4310	0402N221J500CT
	C	4307,4308,4407,4408 (1000 pF)	DCG1094
	C	4311,4312,4411,4412 (100 pF)	DCG1082
	C	4313,4314,4413,4414 (220 uF/25 V)	DCH1369
	C	4315,4316,4415,4416	0603B223K500CT
B	C	4323,4324,4423,4424 (0.033 uF)	DCE1028
	C	4329,4330,4429,4430 (0.01 uF)	ACE7097
	C	4337,4338,4433,4434 (220 uF/25 V)	DCH1358
	C	4343-4346,4443-4446 (560 pF)	DCG1091
	C	4347-4350,4435,4436	0603B104K500CT
■	C	4351,4352,4451,4452 (2200 pF)	DCG1098
	C	4355,4356,4455,4456 (0.01 uF)	DCE1057
	C	4402,4404,4431,4432	0603B103K500CT
	C	4405,4406,4409,4410	0402N221J500CT
	C	4437,4438 (220 uF/25 V)	DCH1358
C	C	4439-4442,4613,4618 (100 uF/25 V)	DCH1357
	C	4447-4450,4505,4512	0603B104K500CT
	C	4501,4522 (47 uF/10 V)	DCH1375
	C	4502,4523,4851,4852 (0.01 uF)	DCE1038
	C	4503,4524,4619,4727	0402B103K500CT
■	C	4506,4513,4527,4534	0603B103K500CT
	C	4507,4514,4528,4535	0603N102J500CT
	C	4508,4511,4516,4517 (1000 pF)	DCG1094
	C	4521,4542 (100 uF/10 V)	DCH1376
	C	4526,4533,4543-4545	0603B104K500CT
D	C	4529,4532,4537,4538 (1000 pF)	DCG1094
	C	4530,4536	0805X475K250CT
	C	4546,4549,4621,4624	0603B103K500CT
	C	4547,4550,4552,4554	0603N102J500CT
	C	4548,4603,4604,4620	0603B104K500CT
■	C	4551,4553,4738,4740	0603N101J500CT
	C	4605,4606 (47 uF/35 V)	DCH1379
	C	4609,4610 (10 uF/50 V)	DCH1377
	C	4611,4614 (22 uF/50 V)	DCH1378
	C	4615-4617,4762	0402B104K160CT
E	C	4622,4625,4629,4701	0603N102J500CT
	C	4623,4626,4627,4731	0603B104K500CT
	C	4628,4702,4704,4771	0603B103K500CT
	C	4703,4737,4739,4741	0603N102J500CT
	C	4705,4706 (2 uF/50 V)	DCH1363
■	C	4707-4710	0603N222J500CT
	C	4715,4720 (100 uF/25 V)	DCH1357
	C	4716-4719	0402N102J500CT
	C	4721,4722	0402N471J500CT
	C	4723,4724,4733,4734	0402N821J500CT
F	C	4728,4769	0402B103K500CT
	C	4732,4757,4758,4770	0603B104K500CT
	C	4735,4736,4759	CEJQNP100M35
	C	4742,4744,4746,4748	0603N101J500CT
	C	4743,4745,4747,4749	0603N102J500CT
■	C	4750	0603N101J500CT
	C	4751,4752	0402N101J500CT
	C	4760,4761,4764	CEJQ100M35
	C	4763,4768	CEJQ470M16
	C	4765-4767	0402B104K160CT

Mark	No.	Description	Part No.
■	C	4772,4775,4853,4903	0603N102J500CT
	C	4773,4776,4954	0603B104K500CT
	C	4774,4855,4905,4955	0603B103K500CT
	C	4901,4902,4951,4952 (0.01 uF)	DCE1038
	C	4953	0603N102J500CT
■	C	5051,5053,5055 (1 uF)	DCG1109
	C	5052 (22 uF)	DCG1110
	C	5054,5056 (0.1 uF)	DCG1104
	AOUTB ASSY Consists of AOUT ASSY HPPW ASSY RTNJ ASSY		
	CIM SEMICONDUCTORS		
■	⚠	IC 5101	MM3571A12P
		IC 5102,5103	TC7SH08FUS2
		IC 5104	TC7SZ08FUS2
		IC 5202	ES9026PRO@V
		IC 5301,5302,5501,5502	OPA1678ID
NSP	IC	5303,5304	MUSES8920KX7@V
	IC	5401,5402,5601	NJM2068MD
	IC	5403,5404,5602,5603	NJM8080RB1S1
	IC	5503,5504,5801,5802	NJM2068D
	⚠	IC 5701	BD9851EFV
■	Q	5301,5801,5803,5805	LSCR523UB
	Q	5302-5305,5401-5404	INC2002AC1
	Q	5501-5504,5601,5602	INC2002AC1
	⚠	Q 5701,5702	RSQ030P03
	Q	5802,5804,5806,5808	LSAR523UB
■	Q	5807,5817,5818	LSCR523UB
	Q	5809,5811,5813,5815	KTC3209
	Q	5810,5812,5814,5816	KTA1281
	Q	5819,5820	LTC124EUB
	Q	5821-5824	LSAR523UB
■	D	5301,5302,5401,5402	1SS355L@V
	D	5701-5703	RB162MM-40TF
	D	5801-5810	1SS355L@V
	D	5901,5902	DF2B18FU
	MISCELLANEOUS		
■	L	5701,5702 POWER INDUCTOR	ATH7011
	JA	5301,5302 CANON CONNECTOR	DKB1093
	JA	5401 4P PIN JACK	DKB1090
	JA	5501 6.5 DIA JACK	DKN1669
	JA	5502,5901 6.5 DIA JACK	DKN1700
■	JA	5601,5602,5902 6.5 DIA JACK	DKN1699
	KN	5801,5802 WRAPPING TERMINAL	CKF1089
	RY	5301,5302,5801,5802 RELAY	DSR1023
	CN	5101 CONNECTOR	HHW-L0920-J1@V
	CN	5102 CONNECTOR	VKN2050
■	CN	5103 CONNECTOR	HHW-SL0320-J1@V
	CN	5701 CONNECTOR	HHW-L0420-J1@V
	CN	5801 19P CONNECTOR	VKN1423
	CN	5802 CONNECTOR	HHW-L0320-J1@V
	CN	5803 CONNECTOR	HHW-L0620-J1@V
■	CN	5901 CONNECTOR	HHW-R0420-J1@V
	1001	CANON SHIELD	DNF1789

5		6		7		8	
Mark	No. Description	Part No.	Mark	No. Description	Part No.		
	1002-1004 PHONE SHIELD	DNF1875	R	5827-5834	RC0603DR-071KL@V		
	VA 5301-5306,5401-5405 VARISTORS	EZJZ1V270RM					
	VA 5501-5505,5601-5603 VARISTORS	EZJZ1V270RM	R	5835-5842	RC0603DR-071K2L@V	A	
			R	5843-5866	RC0805JR-0724RL@V		
	VA 5901 VARISTORS	EZJZ1V270RM	R	5867-5870	RC0603JR-07100KL@V		
			R	5871-5875	RC0402JR-072K2L@V		
			R	5876-5879,5881,5883	RC0603JR-0710KL@V		
RESISTORS			R	5880,5882,5884,5885	RC0603JR-0747KL@V		
R	5101,5213,5215,5216	RC0402JR-070RL@V	R	5886,5887	RC0603JR-0710KL@V		
R	5102,5103	RC0402JR-0747RL@V	R	5888-5891	RC0603JR-0747KL@V		
R	5104	RT0603DRD0782RL@V	R	5901,5902	RC0603DR-07100RL@V		
R	5203	RT0603DRD071K5L@V	CAPACITORS				
R	5204	RT0603DRD071KL@V	C	5101,5108,5301,5302 (220 uF/25 V)	DCH1358		
			C	5102,5106,5303,5304 (0.033 uF)	DCE1041	B	
R	5219,5351-5354	RC0603JR-070RL@V	C	5104,5109,5120 (0.01 uF)	DCG1101		
R	5301-5304	RT0603DRD073K3L@V	C	5107,5117,5118,5710	0402B104K160CT		
R	5305-5308	RT0603DRD07680RL@V	C	5110,5305-5308,5401 (100 uF/25 V)	DCH1357		
R	5313-5320,5403,5404	RC0603DR-071K8L@V	C	5111,5223,5224 (1000 pF)	DCG1094		
R	5321-5328,5447,5448	RC0603DR-073K3L@V	C	5112,5222,5317-5320 (0.1 uF)	DCG1104		
			C	5113 (22 uF)	DCG1110		
R	5329-5332,5529-5532 (330 ohm)	DCN1200	C	5115 (1 uF)	DCG1109		
R	5333-5336,5533-5536	RC0603JR-074K7L@V	C	5119,5203,5204,5215 (0.1 uF)	DCE1062		
R	5337	RC0402JR-071KL@V	C	5122,5201,5202 (47 uF/10 V)	DCH1375		
R	5338,5713	RC0402JR-0710KL@V	C	5208,5236,5411-5414	0603B104K500CT		
R	5339-5342,5537-5540	RC0603JR-0710KL@V	C	5210,5212,5217,5219	0603B103K500CT	C	
			C	5211,5213,5218,5220	0603N102J500CT		
R	5343-5346,5431-5434	RC0603JR-0718KL@V	C	5214 (100 uF/10 V) DCH1376			
R	5347-5350,5435-5438	RC0603JR-0722RL@V	C	5225,5242	0402B103K500CT		
R	5401,5402,5405,5406	RC0603DR-074K7L@V	C	5226-5233 (1000 pF)	DCG1094		
R	5407,5408,5513-5520	RC0603DR-071K8L@V	C	5234,5347,5348,5426	0603B103K500CT		
R	5409-5412	RC0603DR-073K6L@V	C	5235,5345,5346,5425	0603N102J500CT		
			C	5243,5423,5424,5905	0402N102J500CT		
R	5417-5420	RC0603DR-073K9L@V	C	5244,5519-5526	0402N101J500CT		
R	5421-5424,5449,5450	RC0603DR-07680RL@V	C	5309-5312,5507-5510 (3300 pF)	DCG1100		
R	5425-5428,5615,5616	RC0603JR-07100KL@V	C	5313-5316,5539-5542 (47 pF)	DCG1090		
R	5429,5430	RC0402JR-0747KL@V	C	5325-5328,5333-5336 (100 pF)	DCG1082	D	
R	5451,5452,5501-5504	RC0603DR-073K3L@V	C	5329-5332 (0.1 uF)	DCG1104		
			C	5337-5340,5801-5806 (220 uF/25 V)	DCH1358		
R	5453,5454,5505-5508	RC0603DR-07680RL@V	C	5341-5344 (1000 pF)	DCE1032		
R	5521-5528,5625,5626	RC0603DR-073K3L@V	C	5402,5405,5408,5419 (100 uF/25 V)	DCH1357		
R	5541-5544,5617,5618	RC0603JR-0718KL@V	C	5417,5418,5609,5610	CEAT101M16		
R	5545-5548,5619,5620	RC0603JR-0722RL@V	C	5420,5503-5506 (100 uF/25 V)	DCH1357		
R	5601,5602,5605,5606	RC0603DR-074K7L@V	C	5421,5422,5611,5612	0603N222J500CT		
			C	5427-5430,5501,5502	0603B104K500CT		
R	5603,5604,5607,5608	RC0603DR-071K8L@V	C	5431,5432,5435,5436	0603N332J500CT		
R	5613,5614,5627,5628	RC0603DR-07680RL@V	C	5433,5434,5437,5438	0402N471J500CT		
R	5629,5630,5803-5810	RC0603DR-073K3L@V	C	5511-5514,5621,5622	0402N471J500CT	E	
R	5629,5630,5803-5810	RC0603DR-073K3L@V	C	5515-5518,5527,5528	0603B104K500CT		
R	5631,5632	RC0603DR-07680RL@V	C	5531-5534,5807	0402N101J500CT		
R	5702	RC0402DR-0715KL@V	C	5535-5538,5809-5812 (100 uF/25 V)	DCH1357		
			C	5543,5613,5842,5844	0603N102J500CT		
R	5703,5710,5718	RC0402DR-0710KL@V	C	5544,5614,5841,5843	0603B103K500CT		
R	5704	RC0402DR-0747KL@V	C	5607,5608,5615-5618	0603B104K500CT		
R	5705,5716	RC0402DR-0730KL@V	C	5619,5620,5623,5624	0603N332J500CT		
R	5706,5717	RC0402DR-0768KL@V	C	5625,5626,5727	0402N471J500CT		
R	5707	RC0402DR-076K2L@V	C	5701 (0.033 uF)	DCE1041		
			C	5702	0402N391J500CT	F	
R	5708	RC0402JR-070RL@V	C	5703	0402B223K160CT		
R	5709	RC0402DR-07220RL@V	C	5705	0603X474K250CT		
R	5711	RC0603JR-07100RL@V	C	5706	0603B334K100CT		
R	5712	RC0402JR-074K7L@V					
R	5714	RC0603JR-0722RL@V					
R	5715	RC0402JR-075K1L@V					
R	5719	RC0402DR-0756KL@V					
R	5720	RC0402DR-071KL@V					
R	5721	RC0402DR-073K9L@V					
R	5723	RC1206JR-070RL@V					
R	5801	RC0402JR-07100RL@V					
R	5811,5813,5815,5817	RC1206JR-07390RL@V					
R	5812,5814,5816,5818	RC1206JR-07270RL@V					
R	5819-5826	RC0603JR-074K7L@V					

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	C	5707,5712,5713,5715	0805X106K250CT		IC	2702	PCM9211PT@V
	C	5709	0402N561J500CT				
	C	5714,5717	0402X105K160CT		IC	2703	NLV74VHCU04DT
	C	5716	0805X475K250CT		IC	2901	DYW2306*
	C	5720	0402B682K500CT		*Part number of the initial firmware equipped		
	C	5721,5722	0402B104K160CT	NSP	IC	3102	W9825G6KH-6@V
	C	5723,5725,5837-5840	0805X106K160CT	⚠	IC	3104	RTL8304E-CG
					IC	3301	NJM2374AM
	C	5724,5726,5730	1206X226K160CT		IC	3601,3602	TS3USB221ERSER@V
	C	5728,5729 (47 uF/35 V)	DCH1379		IC	3607,3608	TUSB213RGY
	C	5813-5816 (100 pF)	DCG1082		Q	1,3301	LTC014EEB
	C	5817-5820,5903,5904	0402N101J500CT		Q	2,223,1704,3102	RTQ040P02
	C	5822-5825,5829-5836	0603B104K500CT		Q	201,203,206-209	LSAR523UB
	C	5845,5847,5902	0603B103K500CT		Q	202,602,1101,1401	LTC024EEB
	C	5846,5848,5901	0603N102J500CT		Q	204,205	2SA1576A
	C	5906	0402N102J500CT		Q	211,213-215,502	LSAR523UB
					Q	212,216,218,220	LSCR523UB
					Q	217	RT3N22M
MOTHER ASSY							
Consists of							
MAIN ASSY				⚠	Q	219	LTC014YEB
USBA ASSY					Q	221	RTQ040P02
USBBC ASSY					Q	222	LTC114YUB
					Q	501,601	LTA024EEB
					Q	503,504,1703,1801	LTC124EUB
DFH				⚠	Q	801	CSD87330Q3D
SEMICONDUCTORS					Q	1102	ISA1602AM1
⚠	IC	201-205	MM3542BF		Q	1103,1104	IMX25
⚠	IC	207	MM3479A25P		Q	1105,1106	2SB1188
⚠	IC	208,214	S-1170B33UC-OTS		Q	1701,1702,1802,2901	LTC024EEB
⚠	IC	209,210,216	UA78M33IKVUG3				
⚠	IC	211	BD9E302EFJ@V		Q	1901,2103-2105,3101	LTC124EUB
					Q	2106,2107	LSC4081UB
⚠	IC	213	BU18TD3WG-G@V	⚠	Q	2108-2110	LSA1576UB
	IC	401,502	S-80930CNMC-G80		Q	3103	2SB1188
NSP	IC	402,2801	MIMXRT1062DVJ6B@V		Q	3302	RTQ040P02
	IC	503	DYW2304*				
	*Part number of the initial firmware equipped				Q	3303,3304	2SC5876U3@V
NSP	IC	601	MFI343S00176@V		Q	3305	RQ5L015SP@V
	IC	604	W9864G6KH-5		Q	3601-3604	INC2002AC1
⚠ NSP	IC	801	TPS65911AA2NMA@V		Q	3605-3608	LTC024EEB
NSP	IC	901	66AK2G12ABYA100		Q	3609-3612	LTC043EEB
⚠	IC	1301	LP2996AMR		D	1,204,206-208	1SS355L@V
NSP	IC	1302,1303	W631GU6NB-11@V		D	210-214,216-218	1SS355L@V
					D	220,222,224,225	1SS355L@V
	IC	1401,1404,1406	TC7SH08FUS2	⚠	D	221	UDZV7R5
NSP	IC	1402	DYW2305*		D	228-232,3301	1SS355L@V
	*Part number of the initial firmware equipped						
	IC	1403,1901	TC7SZ08FUS2		D	601,1401,1801,2901	FC-1608SXXK630D08
	IC	1405,1707,1912,1913	TC74VHC08FK		D	2301,2302,2501,2502	DF2B18FU
	IC	1701-1704,1907,1910	TC7SH08FUS2		D	2701-2704,3503,3504	EZAEG2N50A
				⚠	D	3102	RR264M-400
	IC	1705,1706	TC7WH157FKS1@V	⚠	D	3302-3304	RB162MM-40TF
	IC	1903	SI5351C-B03300GM				
	IC	1904,1905	74VHC163FT		D	3305	RB162MM-40TF
	IC	1906	TC7SH04FUS2		D	3501,3502,3605-3612	DF2B5M4CT@V
	IC	1909,2201,2304	TC74LCX08FK		D	3601,3602,3613,3615	AVRH10C101K1R1NE@V
					D	3603,3604,3614,3616	EZAEG2N50A
	IC	1911,1915,1916,2301	TC7SH08FUS2	MISCELLANEOUS			
	IC	1919,1920	TC74VHC08FK	L	3	COIL	ATH7022
	IC	2202,2203	PCM1789PWR@V	L	201,202	SMD SPL INDUCTOR	CTH1597
	IC	2204,2205	NJM4580MD	L	203,204	CHOKE COIL(100 uH)	DTH1229
	IC	2302,2303,2501,2502	TC7WU04FUS1@V	L	205	SMD SPL INDUCTOR	CTH1521
				L	206	SMD SPL INDUCTOR	OTL8042
	IC	2305,2306,2503,2504	PCM9211PT@V				
	IC	2307,2310,3603-3606	TC7SH08FUS2	L	402,2802	POWER INDUCTOR	ATH7047
	IC	2308,2309,2505,2506	CS8421-CZ	L	801	CHOKE COIL (3.6 uH)	CTH1479
	IC	2701,3103	CS8421-CZ				

5			6			7			8			
Mark	No.	Description	Part No.	Mark	No.	Description	Part No.		Mark	No.	Description	Part No.
	L	802-804 SMD SPL INDUCTOR	CTH1531		R	230,296,2367,2370	RC0402DR-072K2L@V					
	L	806 SMD FERRITE BEADS	DTF1126		R	232,276,284,2316	RC0402JR-072K2L@V					
	L	901-910 SMD FERRITE BEADS	DTF1123		R	234-236,239,240	RC1206JR-072R2L@V					
					R	238,269,523,524	RC0402JR-07100KL@V					A
	L	1101-1122 SMD FERRITE BEADS	DTF1124		R	242,272,280,295	RC0402JR-074K7L@V					
	L	3101,3102 SMD FERRITE BEADS	DTF1129									
	L	3301 CHOKE COIL (100 uH)	DTH1228		R	248,289,617,2105	RC0402JR-0722KL@V					
	L	3601,3602 COIL	ATH7015		R	249,268,311,327	RC0402JR-0733KL@V					
	F	3102 EMI FILTER	DTL1106		R	252,2368,2371,2555	RC0402DR-0718KL@V					
					R	253,255,257	RC0402DR-0710KL@V					
	F	3103,3104 COMMON MODE FILTER	DTH1227		R	256	RC0402DR-0712KL@V					
	JA	2301,2501 RCA JACK	DKB1132									
	JA	2701 1P PIN JACK	PKB1045		R	259	RC0402DR-07120KL@V					
	JA	3101 RJ45 CONNECTOR	VKN2023		R	260	RC0402DR-0739KL@V					
	JA	3501 USB JACK	DKB1118		R	262,271,294,302	RC0402JR-070RL@V					
					R	267,807	RC0402JR-0712KL@V					B
	JA	3601,3602 USB JACK	DKN1694		R	270,281,306,1495	RC0402JR-073K3L@V					
	JA	3603,3604 CONNECTOR	DKN1607									
	KN	1 SCREW PLATE	VNE1948		R	273	RC0402JR-071K5L@V					
	KN	2-11 WRAPPING TERMINAL	CKF1089		R	274,297	RC0402JR-07510RL@V					
	KN	3501,3502 WRAPPING TERMINAL	CKF1089		R	277,285,1181	RC0402JR-072K7L@V					
					R	278,286,2314,2315	RC0402JR-07470RL@V					
	KN	3601,3603 STAY	DNG1155		R	279,303	RC0402JR-075K1L@V					
	KN	3602,3604 WRAPPING TERMINAL	CKF1089									
	T	3101,3102 TRANSFORMER	DTX1012		R	287	RC0402DR-076K8L@V					
	X	502,2901 RESONATOR (24 MHz)	CSS1773		R	288	RC0402JR-0715KL@V					
	X	1401 CRYSTAL OSCILLATOR (24 MHz)	DSS1229		R	290,402,504,515	RC0402JR-0747KL@V					
					R	292	RC0402DR-0775KL@V					
					R	293	RC0402DR-0724KL@V					C
NSP	X	1701 CRYSTAL OSCILLATOR (50 MHz)	DSS1231									
	X	1901 OSCILLATOR (25 MHz)	DSS1236		R	300	RC0402DR-0715KL@V					
	X	3101 CRYSTAL (25MHZ)	DSS1205		R	301	RC0402DR-0743KL@V					
	CN	1,2 FFC/FPC CONNECTOR	CKS6543		R	304,314,320,328	RC0402JR-070RL@V					
	CN	3,3601 CONNECTOR	HWW-SL1620-J1@V		R	305,312,315,316	RC0402JR-074K7L@V					
					R	307,2301,2302,2501	RC0402DR-0775RL@V					
	CN	4 19P CONNECTOR	VKN1423									
	CN	5,13 CONNECTOR	VKN2050		R	308,3649,3650,3655	RC0402DR-071K5L@V					
	CN	6 CONNECTOR	HWW-L0820-J1@V		R	309	RC0402DR-073K9L@V					
	CN	7,11 CONNECTOR	HWW-SL0920-J1@V		R	310	RC0402JR-07120RL@V					
	CN	8 CONNECTOR	HWW-L0520-J1@V		R	317,1141,1142,1153	RC0402JR-07220RL@V					
					R	318	RC0402DR-0782KL@V					
	CN	9,3501 CONNECTOR	HWW-SL1020-J1@V									
	CN	10 CONNECTOR	HWW-SL0620-J1@V		R	324,325,331,502	RC0402JR-0710KL@V					D
	CN	12 CONNECTOR	HWW-SL0520-J1@V		R	329,336,338-340	RC0402JR-070RL@V					
NSP	U	2901 WI-FI MODULE	SX-SDMAC2832S+@V		R	330,606,608,613	RC0402JR-071KL@V					
	VL	2701 TRANSFORMER	DTX1016		R	335,2715	RC0402DR-07150KL@V					
					R	337	RC0402JR-0739KL@V					
RESISTORS												
	R	1-22,24-42	RC0402JR-070RL@V									
	R	23,77	RC1206JR-070RL@V		R	342,517-522,528	RC0402JR-070RL@V					
	R	44-49,263,322	RC0603JR-070RL@V		R	403,506,540,813	RC0402JR-07100RL@V					
	R	55,326,614,616	RC0402JR-0722RL@V		R	501,503,505,546	RC0402JR-0747RL@V					
	R	60,62,265,266	RC0402JR-0710KL@V		R	507-512,537,541	RC0402JR-0756RL@V					
					R	513	RC0402JR-0727KL@V					
	R	61,206-209,212	RC0402JR-07100KL@V									
	R	66,817,818	RC0805JR-070RL@V		R	514,527,538,539	RC0402JR-0710KL@V					E
	R	73,76,254,261	RC0402JR-070RL@V		R	516,2910	RC0603JR-072M2L@V					
	R	210,211,258,3155	RC0402DR-0727KL@V		R	526,529,565-577	RC0402JR-0747KL@V					
	R	213	RC0402DR-0762KL@V		R	530,533,535,536	RC0402JR-070RL@V					
					R	531,532,534,623	RC0402JR-07100KL@V					
	R	214	RC0402DR-0733KL@V									
	R	215	RC0402DR-0716KL@V		R	543,544,548-563	RC0402JR-0756RL@V					
	R	216,225	RC0402DR-0711KL@V		R	545,624,643,645	RC0402JR-0710KL@V					
	R	217,223,226	RC0603DR-07560RL@V		R	601-604,618,621	RC0402JR-070RL@V					
	R	218,221,224,227	RC0402DR-072K2L@V		R	607,609,619,1464	RC0402JR-0756RL@V					
					R	610-612,1167,1309	RC0402JR-074K7L@V					
	R	219,1184	RC0402DR-078K2L@V									
	R	220	RC0402DR-0751RL@V		R	615,1493,1500,1505	RC0402JR-071KL@V					
	R	222	RC0402DR-0722KL@V		R	620,2107,2108	RC0402JR-0747KL@V					F
	R	228,2238-2245	RC0603DR-076K8L@V		R	629-632,636,637	RC0402JR-070RL@V					
	R	229	RC0603DR-0775RL@V		R	647,1438-1442	RC0402JR-0747RL@V					
					R	672,806,809,811	RC0402JR-0710KL@V					

Mark	No.	Description	Part No.
A	R	673,675,678,684	RC0402JR-070RL@V
	R	674,1420,1434,1435	RC0402JR-0722RL@V
	R	680,681,686,687	RAB4CQ220J
	R	801-804,808,901	RC0402JR-070RL@V
	R	814,816,1104,1107	RC0402JR-0710KL@V
B	R	1110,1116,1120-1122	RC0402JR-0710KL@V
	R	1124,1125,1127,1128	RC0402JR-0710KL@V
	R	1130-1134,1136-1140	RC0402JR-0710KL@V
	R	1143,1302-1305,1401	RC0402JR-0710KL@V
	R	1144-1152,1156-1164	RC0402JR-07330RL@V
C	R	1154,2378,2381,2565	RC0402JR-07220RL@V
	R	1155,1166	RAB4CQ472J
	R	1168	RAB4CQ222J
	R	1169	RC0603JR-07100KL@V
	R	1170	RC0603JR-078K2L@V
D	R	1171	RAB4CQ473J
	R	1172,1174	RC0603DR-07120RL@V
	R	1173,1175	RC0603DR-07150RL@V
	R	1176,1177	RC0603DR-07510RL@V
	R	1178,1179,2362,2363	RC0402FR-071KL@V
E	R	1180,1185	RC0402DR-0715RL@V
	R	1182	RC0402JR-073KL@V
	R	1183	RC0402DR-079K1L@V
	R	1306,1307,1312,1316	RC0402FR-07240RL@V
	R	1308,1402,1406,1407	RC0402JR-070RL@V
F	R	1310,1315,1417,1480	RC0402JR-07100RL@V
	R	1314,1465,1469,1483	RC0402JR-074K7L@V
	R	1318-1341	RC0402DR-0739RL@V
	R	1403,1404,1408,1410	RC0402JR-0710KL@V
	R	1413,1414,1416,1421	RC0402JR-07100KL@V
G	R	1415,1427,1428,1430	RC0402JR-0710KL@V
	R	1418,1425,1426,1429	RC0402JR-070RL@V
	R	1419,1422,1736-1739	RC0402JR-0733RL@V
	R	1423,1424,2929,2930	RC0402JR-07100KL@V
	R	1431,1437,1443,1456	RC0402JR-070RL@V
H	R	1432,1436,1444,1454	RC0402JR-0710KL@V
	R	1445-1449,1461,1462	RC0402JR-0747RL@V
	R	1450-1453	RC0402JR-07130RL@V
	R	1455,1457,1458,1460	RC0402JR-0710KL@V
	R	1463,1477,1507	RC0402JR-070RL@V
I	R	1467,1472-1474,1478	RC0402JR-0747RL@V
	R	1471,1488,1506,1509	RC0402JR-0710KL@V
	R	1475,1484-1487	RC0402JR-0722RL@V
	R	1479,1517-1522,1524	RC0402JR-0747RL@V
	R	1482,1728,1732,1829	RC0402JR-07100RL@V
J	R	1489-1492,1496,1497	RC0402JR-0722RL@V
	R	1494,1529-1532,1543	RC0402JR-074K7L@V
	R	1498,1499,1501,1502	RC0402JR-073K3L@V
	R	1504,1711-1714	RC0402JR-073K3L@V
	R	1510-1514,1724,1733	RC0402JR-070RL@V
K	R	1515,1523,1526	RC0402JR-0722RL@V
	R	1525,1527,1528,1821	RC0402JR-0747RL@V
	R	1533-1542,1544,1725	RC0402JR-0722RL@V
	R	1705,1706,1717,1718	RC0402JR-0710KL@V
	R	1707-1710	RC0402JR-071K8L@V
L	R	1715,1716,1727,1903	RC0402JR-0756RL@V
	R	1719,1720	RC0402FR-07200RL@V
	R	1721,1722,1729,1731	RC0402JR-0710KL@V
	R	1723	RC0402FR-073KL@V

Mark	No.	Description	Part No.
M	R	1726,1730,1734,1846	RC0402JR-0722RL@V
	R	1735,1740,1744,1745	RC0402JR-070RL@V
	R	1743,3164	RC0402JR-0733KL@V
	R	1801,2911,2915,3118	RC0402JR-071KL@V
	R	1802,1809,1811,1813	RC0402JR-0710KL@V
N	R	1803,1805,1807,1810	RC0402JR-070RL@V
	R	1815,1817,1818,1822	RC0402JR-0710KL@V
	R	1820,1825-1828,1834	RC0402JR-070RL@V
	R	1823,1824,1833,1835	RC0402JR-0710RL@V
	R	1830,1831,1839,1840	RC0402JR-0747RL@V
O	R	1832,1906,3175,3179	RC0402JR-074K7L@V
	R	1836,1837,1843-1845	RC0402JR-070RL@V
	R	1838,1904,1905	RC0402JR-07100RL@V
	R	1841,1842,1849-1854	RC0402JR-0710KL@V
	R	1847,1848,1857	RC0402JR-070RL@V
P	R	1855,1909,1911,1919	RC0402JR-0722RL@V
	R	1858,1908,2220,2221	RC0402JR-0710KL@V
	R	1859-1865,1868,1910	RC0402JR-070RL@V
	R	1902	RT0603DRD0756RL@V
	R	1912-1914,1918,1921	RC0402JR-07100RL@V
Q	R	1915,1926,2203,2204	RT0603DRD0768RL@V
	R	1916,1917,1927,2938	RC0402JR-0768RL@V
	R	1920,1922-1924	RC0402JR-0722RL@V
	R	1929,2310-2313	RC0603JR-0768RL@V
	R	1930-1935,2303	RC0402JR-0722RL@V
R	R	1936-1945,1947,1948	RC0402JR-0747RL@V
	R	1953,1954,1963-1976	RC0402JR-0747RL@V
	R	2103,2205,2206,2209	RC0402JR-070RL@V
	R	2106,2111,2114,3167	RC0402JR-0722KL@V
	R	2109,2110	RC0402JR-07390KL@V
S	R	2112,2113,2115,2116	RC0402JR-0711KL@V
	R	2117-2120,2308,2309	RC0402JR-0747KL@V
	R	2201,2202,2207,2208	RC0402JR-07100RL@V
	R	2218,2219,2327,2329	RC0402JR-07100RL@V
	R	2222-2229	RC0603DR-0713KL@V
T	R	2230-2237	RC0603DR-0715KL@V
	R	2246,2247	RC0402JR-07220KL@V
	R	2306,2307,2505,2506	RC0402JR-0710RL@V
	R	2317,2511,2512	RC0402JR-072K2L@V
	R	2318,2319,2513,2514	RC0402JR-07680RL@V
U	R	2320-2323	RC0603JR-0768RL@V
	R	2326,2328,2330-2335	RAB4CQ103J
	R	2336,2337,2386,2387	RC0402JR-07100RL@V
	R	2338,2339,2517,2519	RAB4CQ103J
	R	2340,2341,2531,2532	RC0402JR-0710KL@V
V	R	2343,2344,2350,2351	RC0402JR-070RL@V
	R	2345,2352,2536,2543	RC0402JR-0747RL@V
	R	2346-2348,2353-2359	RC0402JR-0722RL@V
	R	2360,2361,2366,2369	RC0402JR-0747KL@V
	R	2364,2365,2551,2552	RC0402FR-07100KL@V
W	R	2372,2373,2507,2508	RC0402JR-0747KL@V
	R	2374,2375,2561,2562	RC0402FR-0727KL@V
	R	2376,2377,2379,2380	RC0402JR-070RL@V
	R	2382-2385,2537-2539	RC0402JR-0722RL@V
	R	2502	RC0402DR-0775RL@V
X	R	2509,2510	RC0402JR-07470RL@V
	R	2518,2520,2527,2528	RC0402JR-07100RL@V
	R	2521-2526,2529,2530	RAB4CQ103J
	R	2534,2535,2541,2542	RC0402JR-070RL@V

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	R	2544-2546,2718-2722	RC0402JR-0722RL@V		R	3313	RC0402JR-0720KL@V
	R	2547,2548,2553,2556	RC0402JR-0747KL@V		R	3314,3315	RC1206JR-072K2L@V
	R	2549,2550,2711,3150	RC0402FR-071KL@V		R	3316,3609,3610	RC0402JR-0710KL@V
	R	2554,2557,2713	RC0402DR-072K2L@V		R	3317	RC0402JR-076K8L@V
	R	2558,2714	RC0402DR-0718KL@V		R	3318	RC0603JR-0722KL@V
	R	2559,2560,2706,2712	RC0402JR-0747KL@V		R	3319	RC0603JR-0747KL@V
	R	2563,2564,2566,2567	RC0402JR-070RL@V		R	3322	RC0805JR-071K2L@V
	R	2568,3158	RC0402JR-07220RL@V		R	3326 (6.8 kohm)	DCN1212
	R	2569,2570,2703,2734	RC0402JR-07100RL@V		R	3605,3606	RC0402JR-074K7L@V
	R	2702,2704,2705	RC0402JR-070RL@V		R	3614,3619,3620	RC0402JR-070RL@V
	R	2708-2710,2730,2731	RC0402JR-070RL@V		R	3615-3618	RC0603DR-075K1L@V
	R	2716	RC0402DR-07110KL@V		R	3621-3626	RC0402JR-071KL@V
	R	2717,2803,2909,2922	RC0402JR-0747KL@V		R	3629-3642,3651,3657	RC0402JR-0710KL@V
	R	2723,2724,2733,2735	RAB4CQ103J		R	3643,3645	RC0402JR-0724KL@V
	R	2725	RC0402JR-07680RL@V		R	3647,3653	RC0402DR-073K3L@V
	R	2726,2944,2945,2966	RC0402JR-0722RL@V		R	3648,3654	RC0402DR-071K8L@V
	R	2729,2963,2965,3106	RC0402JR-0747RL@V		R	3656	RC0402DR-071K5L@V
	R	2732,2931,2953-2955	RC0402JR-0710KL@V		R	3658	RC0603JR-070RL@V
	R	2736	RT0603DRD07100RL@V		R	3659,3660	RC0402JR-07100RL@V
	R	2737	RC0402JR-071K2L@V		R	3923	RC0402JR-0756RL@V
	R	2738-2741,2904,2905	RC0402JR-07100RL@V	CAPACITORS			
	R	2742,3142,3180,3652	RC0603JR-070RL@V		C	2-5,24,50	0402B104K160CT
	R	2744	RC0603JR-07220RL@V		C	7,9,30,45	0603B104K500CT
	R	2745	RC0603JR-07110RL@V		C	12,15 (100 uF/25 V)	CCH2000
	R	2806,2901,2919,2920	RC0402JR-070RL@V		C	13,16,21 (0.01 uF)	DCG1101
	R	2912-2914,2916-2918	RC0402JR-0756RL@V		C	18,902,2201 (100 uF/16 V)	DCH1365
	R	2923-2925,2927,2928	RC0402JR-070RL@V		C	23,26,28,29	0402N102J500CT
	R	2926,2973-2984,3141	RC0402JR-0747KL@V		C	25,37 (0.1 uF)	DCE1062
	R	2933,2934,2936,3125	RC0402JR-07100KL@V		C	27 (150 uF/16 V)	DCH1356
	R	2935,2937,2940,2969	RC0402JR-070RL@V		C	31	CEVW470M25
	R	2939,2941-2943	RC0402JR-0768RL@V		C	32,33 (0.033 uF)	DCE1041
	R	2964,2968,3107,3111	RC0402JR-0756RL@V		C	34,35,284 (220 uF/25 V)	DCH1369
	R	2971,3120,3144,3162	RC0402JR-070RL@V		C	36,38,40,41 (1 uF)	DCG1109
	R	2997,2998,3000,3002	RC0402JR-0710KL@V		C	39 (270 uF/16 V)	DCH1355
	R	3101-3104,3168-3173	RC0402JR-0722RL@V		C	43,51,211-215	0402N102J500CT
	R	3108,3109,3114-3116	RC0402JR-0710KL@V		C	44,47,48,61 (1 uF)	DCG1109
	R	3112,3129,3627,3628	RC0402JR-0756RL@V		C	46,311,1901,2206 (0.1 uF)	DCG1104
	R	3119,3121,3123,3126	RC0402JR-071KL@V		C	201-205,305	1206X106K250CT
	R	3127,3203,3301,3302	RC0402JR-0710KL@V		C	206-210,268	0603B104K500CT
	R	3136,3137,3160,3161	RAB4CQ220J		C	221-225,245-249	0402B104K160CT
	R	3151,3153,3607,3608	RC0402JR-0747KL@V		C	230-234	0603B153K500CT
	R	3152	RC0402FR-07100KL@V		C	250,417,447,601	0402N471J500CT
	R	3154	RC0402DR-074K7L@V		C	251,253	0402N821J500CT
	R	3159	RC0402FR-0727KL@V		C	252	0402N391J500CT
	R	3165,3166,3182,3198	RC0402JR-070RL@V		C	256	0402B222K500CT
	R	3181,3184,3187,3194	RC0402JR-074K7L@V		C	260	0402N681J500CT
	R	3183,3186,3189,3190	RC0402JR-0722RL@V		C	261-267,276,308	0402N102J500CT
	R	3193,3225	RC0402JR-0722RL@V		C	270-272,281,288	0603B104K500CT
	R	3196,3200-3202,3224	RC0402JR-074K7L@V		C	273-275,278-280	0805X106K250CT
	R	3199,3601-3604,3613	RC0402JR-070RL@V		C	277,282,283,285	0603X106K6R3CT
	R	3222,3223	RC0402FR-073K9L@V		C	286,294,317,326	0805X475K250CT
	R	3226-3233	RC0402DR-07100RL@V		C	287,336-340	0402B103K500CT
	R	3234-3237	RC0402JR-0775RL@V		C	289,290,310,333	0402B104K160CT
	R	3303	RC0402JR-07100KL@V		C	291,304,354 (0.47 uF)	DCG1107s
	R	3304,3305	RC0805JR-071RL@V		C	292,297 (1 uF)	DCG1109
	R	3306 (330 ohm)	DCN1200		C	293,307,312,318	0603B104K500CT
	R	3307	RC0603DR-0775KL@V		C	295,299,303,810 (220 uF/6.3 V)	DCH1367
	R	3308	RC0402DR-072KL@V		C	298 (0.047 uF)	DCE1027
	R	3309-3312	RC0603JR-072KL@V		C	300,355 (0.1 uF)	ACE7100

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
A	C	302,356 (0.01 uF)	CCG1318	C	1341-1364,1401,1403		0402B104K160CT
	C	314	0402B682K500CT	C	1402,2212,2213,2314		0603X106K6R3CT
				C	1404,1421,1424,1430		0402B104K160CT
	C	316,509,510,1422	0402N102J500CT				
	C	320,325,415,618	0402X105K160CT	C	1405-1407,1413,1414		0402B103K500CT
	C	321,323,2914,2916	0805X226M100CT	C	1416-1420,1715,1716		0402B103K500CT
■	C	327,2208-2211,2222	0603B104K500CT	C	1431,1903,1922,2312		0402N102J500CT
	C	329,433,616,620	0603X106K6R3CT	C	1705-1710,1719,1721		0402B104K160CT
				C	1711-1714,1717,1718		0402B102K500CT
	C	330,2719 (47 uF/35 V)	DCH1364				
	C	341,402,403,405	0402B104K160CT	C	1720,1912,1913,1915		0402B102K500CT
	C	342-345,426,505	0402B103K500CT	C	1722,1724,1908-1911		0402B103K500CT
B	C	350,2215,2217,2219	0603B103K500CT	C	1723,1904,1905,1914		0402B104K160CT
	C	351-353,615,856	0402B102K500CT	C	1906		0402N100J500CT
				C	1916-1918,1921,1925		0402B104K160CT
	C	401,404,407,413	0603X475K100CT				
	C	406,408-410,416	0402B104K160CT	C	1923,1924,1927,1928		0402B102K500CT
	C	411,2810	CEVW220M6R3	C	1926,1929,1930		0402B104K160CT
■	C	418,420,438,439	0603X475K100CT	C	1937-1940,2301,3504		0402B102K500CT
	C	419,421-425	0402X224K160CT	C	1941-1944,2302,2307		0402B104K160CT
				C	2105-2107,2204,2205		0402B103K500CT
	C	427-430,432	0402X224K160CT				
	C	434-436,441-445	0402X224K160CT	C	2203 (1000 pF)		DCG1094
	C	440,2838	CEVW220M16	C	2207,2717 (0.1 uF)		DCG1104
C	C	446,803,809,824	0603X475K100CT	C	2214,2216,2218,2220		0603N102J500CT
	C	501,508,604,617	0402B104K160CT	C	2221,2305,2306,2503		0603B103K500CT
				C	2223,2236-2239,2703		0603B104K500CT
	C	502	0402B473K160CT				
	C	506,507,2902,2903	0402N5R0C500CT	C	2224-2227		0402N151J500CT
	C	602	0402N471J500CT	C	2228-2235,2303,2304		0402N101J500CT
■	C	603,622-628,838	0402B103K500CT	C	2308,2310,2506,2508		0402N470J500CT
	C	605	0603B222K500CT	C	2309,2311,2313,2315		0402B104K160CT
				C	2316,2321,2322,2329		0603X106K6R3CT
	C	619,806,808	0402B104K160CT				
	C	801,802,817,820	0805X106K250CT	C	2317,2318,2513,2514		1206N683J500CT
	C	804,807,811	0805B105K250CT	C	2319,2320,2515,2516		0603N472J500CT
D	C	812-815,818	0402B104K160CT	C	2323,2324,2327,2328		0402B104K160CT
	C	821-823,825,828	0402B104K160CT	C	2325,2326,2336,2338		0402B103K500CT
				C	2330,2333,2334,2510		0603X106K6R3CT
	C	826,1305	0805X475K250CT				
	C	827,2723,3307	0402N331J500CT	C	2331,2335,2337		0402B104K160CT
	C	829,831,832,834	0402B104K160CT	C	2332,2342,2720,2724		0402N102J500CT
■	C	830,2801,2804,2807	0603X475K100CT	C	2339-2341,2505,2507		0402B104K160CT
	C	833,836,839,855	0603X106K6R3CT	C	2501,2502,2722		0402N101J500CT
				C	2504		0603B103K500CT
	C	835,837,843,848	0402B104K160CT				
	C	840-842,844,846	0402B103K500CT	C	2509,2511,2519,2520		0402B104K160CT
	C	845,850,978	0402X225K160CT	C	2512,2517,2518		0603X106K6R3CT
E	C	847,849,857,908	0402B103K500CT	C	2521,2522,2530,2532		0402B103K500CT
	C	851,853,911-913	0402B104K160CT	C	2523,2524,2529,2531		0402B104K160CT
				C	2525-2528,2701,2709		0603X106K6R3CT
	C	858-862,1701-1704	0402B102K500CT				
	C	901,903,904	CEHVW101M6R3	C	2533,2534,2725,2802		0402B104K160CT
	C	905,906,926,929	0402X105K160CT	C	2702,2714,2721,2824		0402B103K500CT
■	C	909,954-961,979	0402B103K500CT	C	2704,2708,2710,2713		0603B104K500CT
	C	910 (680 uF/6.3 V)	DCH1360	C	2706		0603N472J500CT
				C	2707		1206N683J500CT
	C	915-917,919-925	0402B104K160CT				
	C	927,928,930,931	0402B104K160CT	C	2711,2712,2831,3101		0603X106K6R3CT
	C	932,1315-1325	0402X224K160CT	C	2718,3304		0603B104K500CT
F	C	933-953,962-977	0402B104K160CT	C	2803,2805,2806,2808		0402B104K160CT
	C	980,981,987,2814	0402X105K160CT	C	2809,2815,2904,2905		0402B104K160CT
				C	2812,2816,2818,2836		0603X475K100CT
	C	982,984-986	0402B104K160CT				
	C	983,1124,1313,1328	0402B103K500CT	C	2819-2823,2825-2828		0402X224K160CT
	C	1301	CEHVW470M6R3	C	2830,2832-2834		0402X224K160CT
■	C	1302-1304,1306,1311	0402B104K160CT	C	2837,2844		0603X475K100CT
	C	1307-1310,1314,1329	0603X106K6R3CT	C	2839-2843		0402X224K160CT
				C	2901,2917,2918		0402B103K500CT
	C	1312,1326,1327	0402B104K160CT				
	C	1330-1340,2817	0402X224K160CT	C	2906,2909,2912,2915		0402X105K160CT

Mark	No.	Description	Part No.
C	2910,2911,3109,3111		0402B104K160CT
C	3103-3107,3110,3112		0402B103K500CT
C	3108,3120,3121,3123		0603X106K6R3CT
C	3113,3117,3135,3136		0402B103K500CT
C	3114,3116,3119,3122		0402B104K160CT
C	3118		CEVW101M16
C	3124,3126,3128-3130		0402B104K160CT
C	3125,3127		0402N9ROC500CT
C	3131		0603X106K6R3CT
C	3132,3133,3137-3140		0402B104K160CT
C	3134		CEHVAW470M16
C	3141,3142		0402B223K160CT
C	3143 (1000 pF)		ACG1127
C	3144,3302,3317,3624		0402B104K160CT
C	3301		0603B105K160CT
C	3303,3502,3617,3618		0805X106K250CT
C	3305		0603N102J500CT
C	3306,3309		1210B106K500CT
C	3308		1206B475K500CT
C	3310		1210B475K101CT
C	3311,3318		0603B104K101CT
C	3312,3314		CC1206KKX7R0BB105
C	3313 (2 uF/50 V)		DCH1363
C	3315		0603B103K101CT
C	3316		0603B102K101CT
C	3503,3505,3601,3602		0402B103K500CT
C	3506,3603,3604		0402B102K500CT
C	3605,3606,3613-3616		0402B103K500CT
C	3607-3612,3625,3626		0402B102K500CT
C	3619,3620		0805X105K500CT
C	3621,3622		0805X106K250CT
C	3623,3647-3650,3660		0402X105K160CT
C	3627,3628,3637,3638		0402B103K500CT
C	3629-3632,3639-3642		0402B102K500CT
C	3633-3636,3643-3646		0402B104K160CT
C	3651-3654,3667-3674		0402N101J500CT
C	3655-3657,3661,3662		0402B104K160CT
C	3658,3663		0402B102K500CT
C	3659,3664		0402B103K500CT

SUB ASSY

Consists of
UCOM ASSY

LEDB ASSY

LCDB ASSY

USBP ASSY

CRFB ASSY

CFX1 ASSY

CFX2 ASSY

CFX3 ASSY

CFX4 ASSY

GOTVWACADAEAF
SEMICONDUCTORS

⚠	IC 5951	MM3543BH
⚠	IC 5952	TPS2557DRB
⚠	IC 6002	NJM2831F05
	IC 6003-6005	74VHC541FT
	IC 6006	MIMXRT1021DAG5B@V
	IC 6007	DYW2307*

Mark	No.	Description	Part No.
		*Part number of the initial firmware equipped	
	IC 6008		74VHC4051AFT
	IC 6401,6402		74VHC595FT
	IC 6403		74VHC164FT
	IC 8301,8303,8304,8306		DRV5055A1QDBZ
	IC 8302,8305		NJM12904V
	Q 5951		LSCR523UB
	Q 5952		RN1903S1
	Q 6001,6003,6411,6413		LTC024EEB
	Q 6002		LTA023JEB
	Q 6004-6025,6401-6410		2SC4154-11
	Q 6026		2SC4097
	Q 6412,6414,6416,6418		2SB1689
	Q 6415,6417,6419,6421		LTC024EEB
	Q 6420,6422,6430,6432		2SB1689
	Q 6423-6428		2SC4154-11
	Q 6429,6431,6433,6435		LTC024EEB
	Q 6434,6436,6438,6440		2SB1689
	Q 6437,6439		LTC024EEB
	D 5951		UDZV5R1
	D 6002,6517,6522,6527		FC-1608SXX630D08
	D 6401,6403,6405,6407		FC-1608UGK-520D
	D 6402,6404,6406,6408		1SS355L@V
	D 6409,6411,6413,6415		FC-1608UGK-520D
	D 6410,6412,6414,6416		1SS355L@V
	D 6417,6419,6421,6423		FC-1608UGK-520D
	D 6418,6420,6422,6424		1SS355L@V
	D 6425,6427,6429,6431		FC-1608UGK-520D
	D 6426,6428,6430,6432		1SS355L@V
	D 6433,6435,6437,6439		FC-1608UGK-520D
	D 6434,6436,6438,6440		1SS355L@V
	D 6441,6443,6445,6447		FC-1608UGK-520D
	D 6442,6444,6446,6448		1SS355L@V
	D 6449,6451,6453,6455		FC-1608UGK-520D
	D 6450,6452,6454,6456		1SS355L@V
	D 6457,6459,6461,6463		FC-1608UGK-520D
	D 6458,6460,6462,6464		1SS355L@V
	D 6465,6467,6469,6471		FC-1608UGK-520D
	D 6466,6468,6470,6472		1SS355L@V
	D 6473,6475,6477,6479		FC-1608UGK-520D
	D 6474,6476,6478,6480		1SS355L@V
	D 6481,6483,6485,6487		FC-1608UGK-520D
	D 6482,6484,6486,6488		1SS355L@V
	D 6489,6491,6493,6495		FC-1608UGK-520D
	D 6490,6492,6494,6496		1SS355L@V
	D 6497,6499,6501,6503		FC-1608UGK-520D
	D 6498,6500,6502,6504		1SS355L@V
	D 6505,6507,6509,6511		FC-1608UGK-520D
	D 6506,6508,6510,6512		1SS355L@V
	D 6513,6515		FC-1608UGK-520D
	D 6514,6516		1SS355L@V
	D 6518-6521,6523-6526		FC-1608YXK585F08
	D 6528-6531,6533-6536		FC-1608YXK585F08
	D 6532,6537,6542,6543		FC-1608SXX630D08
	D 6538-6541,6544-6547		FC-1608YXK585F08
	D 6548		FC-1608SXX630D08
MISCELLANEOUS			
	L 5951	CHOKE COIL (10 uH)	CTH1486
	L 6001	CHIP FEEDS FILTER	BTX1047

Mark	No.	Description	Part No.
A	L 6003	POWER INDUCTOR	ATH7047
	L 6601	CHIP INDUCTOR(10U)	DTL1105
	KN 5951,5952	WRAPPING TERMINAL	CKF1089
	KN 6002,6605	WRAPPING TERMINAL	CKF1089
	X 6001	RESONATOR (24 MHz)	CSS1773
	CN 5951,6006,8301	CONNECTOR	HWW-SR0620-J1@V
	CN 5952	CONNECTOR	HWW-SR0520-J1@V
	CN 6001	CONNECTOR	CKS3856
	CN 6002	FFC/FPC CONNECTOR	S100-SSA-31-T2@V
	CN 6003	30P CONNECTOR	VKN1322
B	CN 6004,6005,6008,6009	CONNECTOR	HWW-SR0320-J1@V
	CN 6007	19P CONNECTOR	VKN1311
	CN 6010	23P CONNECTOR	VKN1315
	CN 6011	21P CONNECTOR	RKN1062
	CN 6012-6014	FFC/FPC CONNECTOR	CKS6543
	CN 6401	CONNECTOR	CKS3860
	CN 6601	FFC/FPC CONNECTOR	CKS6543
	CN 6602	FFC/FPC CONNECTOR	DKN1677
	CN 6801,6851	FFC/FPC CONNECTOR	CKS6625
	CN 6901,6951	FFC/FPC CONNECTOR	CKS6625
C	VA 8301-8305	VARIATORS	EZJZ1V270RM
	RESISTORS		
	R 5951,6168,6178,6180		RC0402JR-07100KL@V
	R 5952		RC0402DR-0733KL@V
	R 5954		RC0402DR-0712KL@V
	R 5955		RC0402DR-07100RL@V
	R 5956		RC0402DR-072K2L@V
	R 5957		RC0603JR-07220RL@V
	R 5958,6112,6164,6206		RC0402JR-0710KL@V
	R 5959		RC0402JR-072K7L@V
D	R 5960		RC0402DR-071K2L@V
	R 5961		RC0402DR-0743KL@V
	R 5962,6002,6018-6033		RC0402JR-07100RL@V
	R 5963		RC0603JR-074K7L@V
	R 5964		RC0603JR-07330RL@V
	R 6004		RC0603JR-071KL@V
	R 6006-6009		RC0402JR-0710ML@V
	R 6010,6012,6014-6017		RC0402JR-0722RL@V
	R 6011,6013,6060		RC0402JR-070RL@V
	R 6050-6052,6054,6144		RC0402JR-07100RL@V
E	R 6053		RC0402JR-07180RL@V
	R 6061,6265,6266		RC1206JR-070RL@V
	R 6066-6076,6079-6081		RC0402JR-070RL@V
	R 6077,6078,6082-6084		RC0402JR-0756RL@V
	R 6096-6098,6101,6102		RC0402JR-070RL@V
	R 6099,6100,6122		RC0402JR-0756RL@V
	R 6114,6179		RC0402JR-074K7L@V
	R 6115-6119,6121,6128		RC0402JR-070RL@V
	R 6124-6127,6129,6131		RC0402JR-0756RL@V
	R 6130,6133,6217-6221		RC0402JR-0722KL@V
F	R 6132,6134-6138,6141		RC0402JR-0756RL@V
	R 6139,6140,6142,6143		RC0402JR-070RL@V
	R 6145,6182,6186,6411		RC0402JR-0722RL@V
	R 6146,6148,6149,6151		RC0402JR-07100RL@V
	R 6147,6150,6152-6154		RC0402JR-0756RL@V
	R 6155,6156,6158,6161		RC0402JR-070RL@V
	R 6157,6159,6162,6165		RC0402JR-07100RL@V
	R 6163,6166,6170,6184		RC0402JR-070RL@V
	R 6167,6169,6171,6174		RC0402JR-07100RL@V

Mark	No.	Description	Part No.
	R 6173,6175,6181,6188		RC0402JR-0756RL@V
	R 6176,6177,6401-6410		RC0402JR-07100RL@V
	R 6183,6189,6193,6201		RC0603JR-070RL@V
	R 6187,6196,6197,6199		RC0402JR-070RL@V
	R 6190-6192,6194,6195		RC0402JR-0756RL@V
	R 6198,6200		RC0402JR-0756RL@V
	R 6204		RC0402JR-072M2L@V
	R 6205,6284,6285		RC0805JR-070RL@V
	R 6207-6216,6222-6235		RC0402JR-0720KL@V
	R 6236-6242,6412,6425		RC0402JR-0722KL@V
	R 6243-6247,6253-6257		RC0603JR-072K2L@V
	R 6248-6252,6258-6262		RC0603JR-0747KL@V
	R 6263		RC0402JR-071K8L@V
	R 6264,6603		RC0402JR-0710KL@V
	R 6274-6283		RC1206JR-070RL@V
	R 6286,6601,6604-6626		RC0402JR-070RL@V
	R 6413-6420,6422,6423		RC0402JR-07100RL@V
	R 6421,6424,6428		RC0402JR-0747KL@V
	R 6426,6427,6430,6431		RC0402JR-07100RL@V
	R 6429,6432,6433,6436		RC0402JR-0722KL@V
	R 6434,6435,6438,6439		RC0402JR-07100RL@V
	R 6437		RC0402JR-0722RL@V
	R 6440,6483,6485,6486		RC0402JR-0722KL@V
	R 6441,6442		RC0402JR-07100RL@V
	R 6443-6447,6501-6506		RC0402JR-073K3L@V
	R 6448-6452		RC0402JR-076K8L@V
	R 6453-6462,6507-6512		RC0402JR-0747KL@V
	R 6463,6465,6467,6469		RC0603JR-071K2L@V
	R 6471,6473,6475,6477		RC0603JR-071K2L@V
	R 6479,6481		RC0603JR-071K2L@V
	R 6484,6487,6490,6493		RC0603JR-0710KL@V
	R 6488,6489,6491,6492		RC0402JR-0722KL@V
	R 6494,6495,6497,6498		RC0402JR-0722KL@V
	R 6496,6499		RC0603JR-0710KL@V
	R 6500,6525,6527,6528		RC0402JR-0722KL@V
	R 6513,6514,6523,6524		RC0603JR-07150RL@V
	R 6515,6517,6519,6521		RC0603JR-07120RL@V
	R 6526,6529,6532,6535		RC0603JR-071K5L@V
	R 6530,6531,6533,6534		RC0402JR-0722KL@V
	R 6536,6537,6539,6540		RC0402JR-0722KL@V
	R 6538,6541		RC0603JR-071K5L@V
	R 6542		RC0402JR-0722KL@V
	R 6632,6633,8301,8308		RC0402JR-070RL@V
	R 8302,8310,8318,8326		RC0603JR-070RL@V
	R 8303,8311,8319,8327		RC0603DR-0751KL@V
	R 8306,8314,8322,8330		RC0603DR-0710KL@V
	R 8307,8315,8323,8331		RC0603DR-072K7L@V
	R 8309,8316,8317,8324		RC0402JR-070RL@V
	R 8325,8332		RC0402JR-070RL@V
	VR 6801,6851,6901,6951	ROTARY VR	DCS1151
CAPACITORS			
	C 5951		0805X226M160CT
	C 5952,5956,6016-6018		0402B104K160CT
	C 5953		0603B153K500CT
	C 5957		0402N821J500CT
	C 5959,5967,5969		0402B102K500CT
	C 5961,5962		0805X106K100CT
	C 5963 (100 uF/16 V)		DCH1365

Mark	No. Description	Part No.	Mark	No. Description	Part No.
	C 5964 (1000 uF/6.3 V)	DCH1362		IC 7501	TC74HC4051AF
	C 5965 (0.033 uF)	DCE1028		IC 7601	NJM2903M
	C 5968,5970,6402,6407	0402B103K500CT		Q 7601	RT1P431M
				D 7501,7503,7505,7507	LTL17KTBP5D@V
				D 7502,7504,7506,7508	1SS355L@V
	C 5971,5972	0402B104K500CT			
	C 6001,6049,6050,6060	0402N471J500CT		D 7509,7601	LTL17KRH5D-P
	C 6002,6006,6126,6801	0603B104K500CT		D 7510,7511,7602,7604	1SS355L@V
	C 6003,6027,6030,6033	0805X106K250CT		D 7603,7605	LTL17KTBP5D@V
	C 6004,6008	0603N102J500CT		D 7606-7610	1SS355L@V
	C 6009	0603X225K250CT			
	C 6019,6020 (220 uF/16 V)	CCH2090			
	C 6021 (100 uF/25 V)	CCH2000			
	C 6022,6023,6025,6054	0402N102J500CT			
	C 6024,6026,6029,6032	0402B104K160CT			
	C 6035,6040-6043	0402B104K160CT			
	C 6039,6044,6069,6082	0603X475K100CT			
	C 6045-6048,6056,6059	0402B104K160CT			
	C 6053	0402N470J500CT			
	C 6055,6057,6058,6061	0402N102J500CT			
	C 6062,6064,6066,6068	0402N102J500CT			
	C 6063,6065,6071,6075	0402N471J500CT			
	C 6067,6073,6074,6080	0402B104K160CT			
	C 6070,6072,6076,6078	0402N102J500CT			
	C 6077,6094,6100,6102	0402N471J500CT			
	C 6079,6136,6601,6611	0402N102J500CT			
	C 6081,6083,6088	0402X224K160CT			
	C 6084-6087,6093,6108	0603X475K100CT			
	C 6090	0402X474K6R3CT			
	C 6095,6101,6103,6113	0402B104K160CT			
	C 6096,6106,6114	0805X226M100CT			
	C 6097-6099,6104,6110	0402X224K160CT			
	C 6105,6414	0805X106K250CT			
	C 6107,6112,6127-6133	0402N471J500CT			
	C 6109	0603X475K100CT			
	C 6111,6117	0402N5R0C500CT			
	C 6115	0402X224K160CT			
	C 6118	0402X105K160CT			
	C 6119	CEVW470M6R3			
	C 6120	CEVW101M16			
	C 6123-6125	0603N471J500CT			
	C 6134	0603X106K6R3CT			
	C 6135,6403,6408,6410	0402B104K160CT			
	C 6139-6141	0402B222K500CT			
	C 6401,6406,6604	0402N471J500CT			
	C 6404,6405,6411	0603X474K250CT			
	C 6413,6603	0402B103K500CT			
	C 6417-6428,6430,6432	0402B104K160CT			
	C 6433	0805B106K6R3CT			
	C 6434,6602,6606	0402B104K160CT			
	C 6851,6901,6951	0603B104K500CT			
	C 8301-8306,8308	0402B104K160CT			

PNL2 ASSY
Consists of
PNLU ASSY
MI0B ASSY
PSWB ASSY



MISCELLANEOUS

S 7501-7504,7601 ROTARY SWITCH	DSG1098
S 7505,7602 TACT SWITCH	DSG1079
S 7603 SLIDE SWITCH	DSH1066
S 7651 PUSH SW	ASG1102
CN 7501 13P CONNECTOR	VKN1244
CN 7601 15P CONNECTOR	VKN1246
CN 7651 CONNECTOR	HHW-R0320-J1@V

RESISTORS

R 7501,7502,7504-7507	RC0603JR-07560RL@V
R 7503,7521,7531,7542	RC0603JR-072K2L@V
R 7508,7601	RC0603JR-07680RL@V
R 7509,7523,7533,7543	RC0603JR-07220RL@V
R 7510,7524,7534,7544	RC0603JR-07330RL@V
R 7511,7525,7535,7545	RC0603JR-07390RL@V
R 7512,7526,7536,7546	RC0603JR-07510RL@V
R 7513,7527,7537,7547	RC0603JR-07750RL@V
R 7514,7528,7538,7548	RC0603JR-071K1L@V
R 7515,7529,7539,7549	RC0603JR-071K8L@V
R 7516,7530,7540,7550	RC0603JR-073K6L@V
R 7517,7518,7607,7608	RC0603JR-07560RL@V
R 7519,7604	RC0603JR-07620RL@V
R 7520,7522,7532,7541	RC0603JR-07220KL@V
R 7602	RC0603JR-0722KL@V
R 7603	RC0603JR-071KL@V
R 7605	RC0603JR-071ML@V
R 7606	RC0603JR-0710KL@V
R 7609,7613	RC0603JR-07220KL@V
R 7610,7611	RC0603JR-07430RL@V
R 7612	RC0603JR-072K2L@V
R 7614	RC0603JR-07220RL@V
R 7615	RC0603JR-07330RL@V
R 7616	RC0603JR-07390RL@V
R 7617	RC0603JR-07510RL@V
R 7618	RC0603JR-07750RL@V
R 7619	RC0603JR-071K1L@V
R 7620	RC0603JR-071K8L@V
R 7621	RC0603JR-073K6L@V
R 7651	RC0603JR-07100RL@V
VR 7501-7504 ROTARY VR	DCS1104
VR 7601 ROTARY VR	DCS1117
VR 7602 ROTARY VR	DCS1078

CAPACITORS

C 7501-7505,7507,7509	0603B104K500CT
C 7506,7508,7510,7511	0603N471J500CT
C 7512,7513,7518	0603B104K500CT
C 7514-7517	0603N471J500CT
C 7519-7521	0603N102J500CT
C 7601-7607	0603B104K500CT
C 7651	0603B103K500CT

Mark	No.	Description	Part No.
------	-----	-------------	----------

Mark	No.	Description	Part No.
------	-----	-------------	----------

PNL3 ASSY

Consists of

PNLL ASSY

PNLR ASSY

CHF1 ASSY

CHF2 ASSY

CHF3 ASSY

CHF4 ASSY

PQRSXY

SEMICONDUCTORS

Q 7701,7704,7706,7708
Q 7702,7802,7803
Q 7703,7705,7707,7709
Q 7710,7801,7805,7807
Q 7711,7804,7806,7808

LTC124EUB
2SC4154-11
2SB1689
LTC124EUB
2SB1689

Q 7809,7811,7813,7815
Q 7810,7812,7814,7816
Q 7817
Q 7818
D 7701-7714,7716,7718

LTC124EUB
2SB1689
LTC124EUB
2SB1689
1SS355L@V

D 7715,7717,7857,7859
D 7719,7721,7723,7836
D 7720,7722,7724
D 7801-7835,7837,7839
D 7838,7840,7842,7844

LTL17KSL5D-P
LTL17KTBP5D@V
1SS355L@V
1SS355L@V
LTL17KTBP5D@V

D 7841,7843,7845,7847
D 7846,7849,7851,7853
D 7848
D 7850,7852,7854,7856
D 7855,7861,7865,7867

1SS355L@V
LTL17KTBP5D@V
LTL17KRH5D-P
1SS355L@V
LTL17KTBP5D@V

D 7858,7860,7862,7864
D 7863
D 7866,7868

1SS355L@V
LTL17KTGP4J-P@V
1SS355L@V

MISCELLANEOUS

S 7701,7702,7706,7707 TACT SWITCH
S 7703-7705,7708 SLIDE SWITCH
S 7801-7815,7819-7821 TACT SWITCH
S 7816,7817 SLIDE SWITCH
S 7818 SLIDE SWITCH

DSG1079
DSH1058
DSG1079
DSH1058
DSH1066

S 7822 ROTARY ENCODER
S 7823 TACT SWITCH
S 7824 ROTARY ENCODER
CN 7701 21P CONNECTOR
CN 7802 31P CONNECTOR

DSX1137
DSG1079
DSX1136
VKN1252
VKN1262

CN 8011,8021,8031,8041 CONNECTOR

HWW-L0320-J1@V

RESISTORS

R 7701,7803
R 7703,7806
R 7705,7808,7809
R 7706,7708,7711,7713
R 7707,7712,7717,7722

RC0603JR-07220KL@V
RC0603JR-076K8L@V
RC0603JR-0747KL@V
RC0603JR-0722KL@V
RC0603JR-0727KL@V

R 7709,7710,7714,7715
R 7716,7718,7721,7723
R 7719,7720,7724,7725
R 7726,7728,7810,7812
R 7727

RC0603JR-07560RL@V
RC0603JR-0722KL@V
RC0603JR-07560RL@V
RC0603JR-0722KL@V
RC0603JR-0727KL@V

R 7729,7730
R 7801,7802,8011,8021
R 7805
R 7811,7818,7825,7832
R 7813-7816,7820-7823

RC0603JR-07430RL@V
RC0603JR-070RL@V
RC0603JR-073K3L@V
RC0603JR-0715KL@V
RC0603JR-07560RL@V

R 7817,7819,7824,7826
R 7827-7830,7835-7838
R 7831,7834,7839,7841
R 7833
R 7840,7847,7854,7861

RC0603JR-0722KL@V
RC0603JR-07560RL@V
RC0603JR-0722KL@V
RC0603JR-07270RL@V
RC0603JR-0715KL@V

R 7842-7845,7849-7852
R 7846,7848,7853,7855
R 7856,7858,7863-7866
R 7857,7859
R 7860,7862

RC0603JR-07560RL@V
RC0603JR-0722KL@V
RC0603JR-07560RL@V
RC0603JR-07510RL@V
RC0603JR-0722KL@V

R 8031,8041
VR 7701,7703,7802 ROTARY VR
VR 7702,7801,7803 ROTARY VR
VR 8011,8021 VARIABLE RESISTOR
VR 8031,8041 VARIABLE RESISTOR

RC0603JR-070RL@V
DCS1104
DCS1078
CCW1024
CCW1024

CAPACITORS

C 7701,7802
C 7702-7711,7801,7803
C 7804,7807-7818,8011
C 7805,7806
C 8012,8022,8032,8042

CEJQ470M16
0603B104K500CT
0603B104K500CT
0603B103K500CT
0603N471J500CT

C 8021,8031,8041

0603B104K500CT

U

CDCB ASSY

SEMICONDUCTORS

IC 6701
IC 6702
D 6701-6705,6707
D 6706

AD7147ACPZ500RL7
TC7SH08FUS2
LTST-108TBL@V
UDZV3R6

MISCELLANEOUS

L 6701 CHIP SOLID INDUCTOR
NSP CN 6701 CONNECTOR

XTL3010
CKS3856

RESISTORS

R 6701-6715,6729-6731
R 6716,6721
R 6717
R 6718,6719
R 6720

RC0402JR-073KL@V
RC0402JR-072K2L@V
RC0402JR-0756RL@V
RC0402JR-07220RL@V
RC0402JR-07100RL@V

CAPACITORS

C 6707,6708,6710
C 6711

0603B104K500CT
0603X106K6R3CT

Z

PNLC ASSY

SEMICONDUCTORS

IC 7001-7003
Q 7001-7004,7013-7016
Q 7005,7007,7009,7011
Q 7006,7008,7010,7012
Q 7017,7019,7021

TC74HC4051AF
2SC4154-11
LTC124EUB
2SB1689
LTC124EUB

Mark	No. Description	Part No.	Mark	No. Description	Part No.	
	Q 7018,7020,7022	2SB1689	C	7001,7004,7005	0603B104K500CT	
	D 7001,7010,7019,7020	LTL17KSL5D-P	C	7002,7003	CEJQ470M16	
	D 7002,7004,7006,7017	LTL17KTBP5D@V	C	7006-7009,7015	0603N471J500CT	
	D 7003,7005,7007,7009	1SS355L@V	C	7010-7014,7022-7025	0603B104K500CT	A
	D 7008	LTL17KRH5D-P	C	7016-7018,7036-7038	0603N102J500CT	
	D 7011,7013,7015,7021	LTW-1GHCW4-P(A)@V	C	7019-7021,7026-7029	0603N471J500CT	
	D 7012,7014,7016,7018	1SS355L@V	C	7030-7034,7042-7045	0603B104K500CT	
	D 7022,7024,7026,7028	1SS355L@V	C	7035,7039-7041	0603N471J500CT	
	D 7023,7025,7036	LTW-1GHCW4-P(A)@V	C	7046-7049,7051	0603N471J500CT	
	D 7027,7030,7032,7034	LTL17KTBP5D@V	C	7050,7058-7067	0603B104K500CT	
	D 7029,7038-7040,7043	LTL17KSL5D-P	C	7052-7054	0603N102J500CT	
	D 7031,7033,7035,7037	1SS355L@V	C	7055-7057	0603N471J500CT	
	D 7041,7045,7048	LTL17KTBP5D@V				
	D 7042,7046,7049	1SS355L@V				
	D 7044,7047,7050-7053	LTL17KSL5D-P				
	D 7054-7083	1SS355L@V				

MISCELLANEOUS

S	7001,7007,7013 TACTILE SWITCH	DSG1153			
S	7002-7006,7008 TACT SWITCH	DSG1079			
S	7009 SLIDE SWITCH	DSH1066			
S	7010-7012,7014-7020 TACT SWITCH	DSG1079			
S	7021,7023 TACTILE SWITCH	DSG1153			
S	7022,7024 TACT SWITCH	DSG1079			
CN	7001 23P CONNECTOR	VKN1254			
CN	7002,7003,7005 4P CONNECTOR	VKN1264			C
CN	7004 13P CONNECTOR	VKN1244			
CN	7006 4P CONNECTOR	VKN1264			
CN	7007 15P CONNECTOR	VKN1246			
CN	7008 30P CONNECTOR	VKN1261			

RESISTORS

R	7001	RC0603JR-07220KL@V			
R	7002,7004,7006,7008	RC0603JR-0747KL@V			
R	7003,7005,7007,7009	RC0603JR-076K8L@V			
R	7010-7017,7074,7076	RC0603JR-0747KL@V			
R	7018,7020,7033,7035	RC0603JR-0722KL@V			D
R	7019,7034,7047,7062	RC0603JR-073K3L@V			
R	7022-7024,7027-7029	RC0603JR-07560RL@V			
R	7025	RC0603JR-07680RL@V			
R	7026,7031,7045,7054	RC0603JR-07330RL@V			
R	7030	RC0603JR-07620RL@V			
R	7036-7038,7041-7043	RC0603JR-07560RL@V			
R	7039,7044,7053,7058	RC0603JR-07430RL@V			
R	7046,7048,7061,7063	RC0603JR-0722KL@V			
R	7050-7052,7055-7057	RC0603JR-07560RL@V			
R	7059,7073,7091,7092	RC0603JR-07330RL@V			
R	7064-7067,7069-7072	RC0603JR-07560RL@V			E
R	7075,7077,7079,7081	RC0603JR-076K8L@V			
R	7078,7080,7082-7089	RC0603JR-0747KL@V			
R	7094,7096,7101,7103	RC0603JR-0722KL@V			
R	7095,7102,7111	RC0603JR-073K3L@V			
R	7097,7099,7105,7107	RC0603JR-07430RL@V			
R	7100,7106,7108,7116	RC0603JR-07330RL@V			
R	7110,7112	RC0603JR-0722KL@V			
R	7113,7115	RC0603JR-07430RL@V			
R	7118,7119,7122	RC0603JR-07330RL@V			
VR	7001-7016 ROTARY VR	DCS1078			
VR	7017 ROTARY VR	DCS1117			F
VR	7018,7019 ROTARY VR	DCS1116			

CAPACITORS

AG

SW POWER SUPPLY

There is no service parts.